60p

£3,000 Acorn Competition

YOUR COMPUTER

FEBRUARY 1983 BRITAIN'S BIGGEST-SELLING HOME COMPUTER MAGAZINE Vol. 3 No. 2

The disc revolution – your turn to join

Reviews:
£100 colour Oric
48K Lynx
Atari software
ZX-81 chess in 1K
Spectrum toolkit
Plus plenty for the Dragon, Vic, BBC and Atom

Win a Commodore 64

SILVERSOFT

ORBITER

A fast and furious arcade action game for the ZX Spectrum, Orbiter is written entirely in m/c code with full arcade features including scanners, reverse, hyper-space, continuous scoring, sound effects and humanoids.

GROUND ATTACK

Survival is the n... of the game in this exciting scramble-type arcade game. Fast machine code action with full arcade features.

NEW

MUNCHER

Fruiteatingmonsterbeatingmazemunching creaturecrunchingghostchasingfastamazing Muncher! Fast machine code, maze, race and chase game.

NEW

STARSHIP ENTERPRISE

Soar through the stars in this exciting new space ship simulation. This new, advanced version of Startrek uses the full colour and sound facilities of the Spectrum microcomputer.

ZX 81 Arcade Action List

ZX 81 Compiler	☐	£5.95
Muncher (ZX 81)	☐	£4.95
Asteroids	☐	£4.95
Invaders	☐	£3.95
Alien-dropout	☐	£3.95
Startrek	☐	£3.95
Graphic Golf	☐	£3.95
Super Wumpus	☐	£3.95
Games Pack 1	☐	£3.95

ZX – Spectrum Software

Orbiter	☐	£5.95
Ground Attack	☐	£5.95
Starship Enterprise	☐	£5.95
Muncher	☐	£5.95

GENEROUS DEALER DISCOUNTS AVAILABLE

Send to:
SILVERSOFT
20 Orange Street, London WC2

Please send me as indicated. I enclose a cheque/PO for £_____

NAME_____ ADDRESS_____

PROGRAMMERS. Tired of working for nothing, send your programs to SILVERSOFT for a speedy reply!

YOUR COMPUTER

YOUR LETTERS 29
Pascal hints; Vic-20 colour; Saving and Loading on the Dragon.

NEWS 30
Texas Instruments new £100 computer; giving away micros; BBC robots.

COMPUTER CLUB 33
Simon Beesley downloads downtown with the Worcester Park computer cronies.

THE DISC REVOLUTION 34

Whether you want a database to shame M15 or just to load Snapper, a disc drive could be the answer. We take some drives for a spin.

CAMPUTERS LYNX 42
Bill Bennett reviews the 48K colour computer.

ORIC 46
Colour and sound break the £100 barrier for the first time.

ATARI SOFTWARE 50
Eager for any challenge Jack Schofield tries his luck as astronaut, sub commander and pilot.

SPECTRUM ADD-ONS 56

Tim Langdell assesses the benefit of additional ports and extra memory.

ZX-81 DEEP SPACE 60
Forget about the Danes — only black holes can trouble your Megatrawler.

VIC MINOTAUR 64
Evade the Minotaur and beat the clock in Roger Miah's Vic-20 game.

FORTH FOR BASIC USERS 68
Ian Maclean looks at Forth.

DRAGON GRAPHICS MIX 71
The Brains show you how to mix different coloured text with graphics.

SPECTRUM TOOLKIT 77
Utilities which do not require expert knowledge of machine code.

ATOM BASIC CONDENSER 84
Memory is at a premium in the Atom — which is where Dave Berry's ABC is useful.

BBC COLOUR OVERLAY 89
Put colour display into perspective on the BBC with judicious use of overlays.

BBC A LA MODE 93
Multicoloured graphic symbols can be produced in mode 5. Fintan Culwin shows how.

SPECTRUM CHARACTERS 98
How to make use of the 21 extra characters there for the making.

ZX-81 CHESS 100
"Amazing" was Clive Sinclair's response to David Horne's chess in 1K.

£3,000 ACORN COMPETITION 103
Your Computer and Acornsoft present Castle of Riddles.

BASIC DICTIONARY 105
Tony Edwards' Basic lexicon.

CONTROL 108
John Dawson describes how to interface a printer to a Z-80 PI/O chip.

RESPONSE FRAME 113
Your technical queries answered.

FINGERTIPS 115
Our pocket computer and calculator column.

SOFTWARE FILE 119
Ten program-packed pages, for the ZX micros, Vic, BBC and others.

COMPETITION CORNER 130
Find out who won the Atari and the £15 token. Orb Bomb puzzle. New Commodore 64 competition between pages 26 and 27.

Cover photograph by Stephen Oliver.

Editor
TOBY WOLPE

Assistant Editor
MEIRION JONES

ABC
MEMBER OF THE AUDIT BUREAU OF CIRCULATIONS

Staff Writer
SIMON BEESLEY

Sub-editor
PAUL BOND

Editorial Secretary
LYNN COWLING
Editorial: 01-661 3144

Advertisement Manager
PHILIP KIRBY 01-661 3127

Advertisement Executives
BILL ARDLEY 01-661 8484
PETER RICE 01-661 8441

Midlands Office
KEITH SALT 021-356 4838

Northern Office
RON SOUTHALL 061-872 8861

Advertisement Secretary
JEANETTE MACKRELL

Classified
GILLIAN JOHNSON 01-661 3036

Publishing Director
CHRIS HIPWELL

Your Computer, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.
Subscriptions: U.K. £8 for 12 issues.

© IPC Business Press Ltd 1983

Typesetting by In-Step Ltd, London EC1.
Printed by Riverside Press Ltd, Whitstable, Kent.
Published by IPC Electrical-Electronic Press Ltd, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS. Tel: 01-661 3500 Telex/grams: 892084 BIPRESG. ISSN 0263-0885

EDITORIAL

ONCE UPON A TIME big expensive computers sat in offices and did serious jobs like the accounts and word processing, while little computers stayed at home and pushed lumps of coarse graphics around the screen in a parody of ping-pong. That was not quite as far off as the days when the princess still had to kiss the frog, rather than steer him across three lanes of alligators for a new high score, but it was a time when a computer knew its place: either in the office or in the home. Now that distinction is beginning to blur, and the home computer's increasing sophistication must be credited with a major role in bringing about the change.

By offering more features at ever-lower prices, home micros have made buyers and owners of "serious" systems expect more for their money. After all, put yourself in the shoes of the businessman who has just taken the first step into the unknown and bought a micro for his office. When he then discovers that his dear little nephew's BBC model B or Commodore 64 offers many of the features of the new office system but at a fraction of the cost, he will justifiably feel aggrieved. The businessman's growing awareness of the burgeoning home consumer market means that he will know that the technology in itself is not expensive and will bring him to ask why, when dressed up in a business micro's box, it should prove so costly.

But business computing also exerts a strong pull on the home market. As computer literacy grows, home users want more than just games. They want the option of turning their micros to serious applications such as word processing. That means they must be given real keyboards and mass storage. It is to that demand that manufacturers are just beginning to respond, as we show in this issue. Discs are moving down in price to within the reach of the home micro, and home machines like the Lynx are moving up to take advantage of features such as CP/M, which mean you will be able to run business software at home — or even use the same machine in both environments. If this trend continues, a new market will open for portables which are as entertaining as they are useful. Built-in mass storage might then be less important if a Modem could be incorporated to access outside databases.

It is no coincidence that both Acorn and Sinclair Research plan to release portable micros later this year. ■

NEW SPECTRUM SOFTWARE

48K SPECTRUM

"Shaken But Not Stirred"

A James Bond 007 Adventure

You are secret agent James Bond, No. 007, with a licence to kill. Your task is to locate and disarm a nuclear warhead which has been kidnapped by the mysterious Dr. Death. You try to follow his trail across the continents to his secret island where he is holding the missile. But he has some surprises in store for you!

Even with your range of death defying gadgets you may not manage to escape from the maze of his underground hideout – if you can find it that is!

Anyway, watch out for his henchmen, the steel fisted giant 'PAWS', and the deadly midget 'TIC TAC'. If you finally manage to get through the on screen three dimensional maze, locate the control room, disarm the warhead, and think you deserve a drink, then rush back home for a Vodka Martini – 'SHAKEN BUT NOT STIRRED'

Can you resist being 007? **£6.50**

16K SPECTRUM & 48K SPECTRUM

Everest Ascent

Stake your claim to the Top of the World in this gripping vertical adventure in which you aim to conquer the 29,141' summit of the world's highest peak.

Struggle from base camp to base camp in defiance of all the obstacles which man and nature can throw at you! Survive intense cold as you watch out for avalanches, thin ice and, of course, abominable snowmen! Cope with wayward Sherpas and cross bottomless crevasses but remember to watch your oxygen supply! A game of skill, cunning, bravery and daring for those with a head for heights!

For the 16K Spectrum we have divided this game into exciting parts to give you an adventure as complex and varied as the 48K version.

For the **16K or 48K** Spectrum only **£6.50.**

48K SPECTRUM

Transylvanian Tower

A spine-chilling adventure with spectacular 3-D graphics.

Can you rid the world of Count Dracula before he introduces you to the dark world of the living dead? Horror film addicts will know most of the moves, but we've also added a few of our own! Can you discover the mystery of the turret and escape with its treasures?

Enter via the dungeons and work your way up to the terrifying top! Find objects to help you whilst exploring the 500 rooms – all in exciting 3-D detail – but watch out for the bats.

Give your Spectrum a bite of the action now!

Includes full save routine for use during the daylight hours! **£6.50**

16K SPECTRUM

Ship of the Line

An Adventurous Management Game

Command a 17th Century sailing ship . . . win victories for Britain . . . juggle your supplies, manpower and ammunition . . . fearlessly battle your way up the ranks . . . and finally achieve promotion to First Sea Lord, but beware . . . it won't be easy! Encounter and engage enemy fleets . . . survive sunstroke, fever and famine . . . endure fire, fog and thirst . . . then . . . when you think you've done well . . . rush back to Port for promotion! With full colour, ship graphics and sound . . . **£4.95**

48K SPECTRUM

Ship of the Line

48K version features the chance to send out boarding parties, to build up prize money, to take intelligence tests and to bribe your way up the admiralty ladder! This greatly extended version of Ship of the Line really makes the most of your extra memory. **£6.50**

16K ZX81

Bargain Bytes Cassette One

Deep Sea Adventure * Bank Account * Underground Adventure * Depthcharge * Hangman * Loan Calculator * Codebreaker * Foreign Currency Calculator. A genuine bargain!

Eight interesting programs for just **£5.00**

16K ZX81

Bargain Bytes Cassette Two

Stock Market Game * Seafaring Adventure * Jackpot * OXO * Financial Model * Ski Run * General Knowledge Quiz * Copycat.

Too many programs to desribe for only **£5.00**

Ideal as a ZX81 Starter Pack!

48K SPECTRUM

Multi Function Cash Controller

If you want to make your machine work for you, this is an ideal program . . .

Cash Controller has four basic functions; it keeps your Bank Account in order, it looks after your Home Budgeting, it calculates loan interest and repayments, and finally it checks your mortgage for you. In addition, it only lets you into the program by means of your own secret password which you personally choose. Once you've allocated budget headings, any transactions you put through the Bank Account will automatically be taken into account on your budgets.

Using a Sinclair printer, hard copy statements can be produced running from any date to any date; much more versatile than your regular bank statement! This program has been carefully crash-proofed to prevent a minor error from scrambling the existing data, and comes with clear on-screen instructions plus full printed notes to help you on your way. Finally, it holds up to 200 bank transactions and fills up most of the memory of your 48K Spectrum. **£10.00**

Despatch within 48 Hours Guaranteed.
All tapes despatched by First Class Post.

Richard Shepherd Software

FREEPOST (No stamp required), Maidenhead, Berks SL6 5BY.

OFFER!
Buy 2 get £1 off
Buy 3 get £2 off
Buy 4 get £3 off

Please send me:
48K Spectrum Shaken but not Stirred ☐ at £ 6.50
48K Spectrum Transylvanian Tower ☐ at £ 6.50
48K Spectrum Everest Ascent ☐ at £ 6.50
16K Spectrum Ship of the Line ☐ at £ 10.00
16K Spectrum Cash Controller ☐ at £ 4.95
16K ZX81 Bargain Bytes One ☐ at £ 6.50
16K ZX81 Bargain Bytes Two ☐ at £ 5.00

Discount for buying two or more? Less £ .....
TOTAL £ .....

I enclose Cash/Cheque/Postal Order payable to Richard Shepherd for .....

Name .....
Address .....
Postcode .....

Send your order immediately to Richard Shepherd Software, Freepost (no stamp required), Maidenhead, Berks. SL6 5BY

WHAT A NEW YEAR PACKAGE FROM COMPUTERS FOR ALL

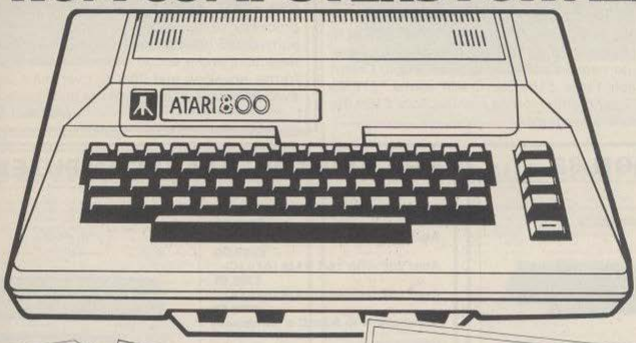

ATARI 800
NEW LOW PRICE
£399.95

There's a computer to suit you at Computers for All!
A full range of the world's finest micros plus the best advice and tremendous value for money!
New Year, so why not a new computer? Choose from the Atari range, Dragon, Oric, MPF II, BBC Micro, Commodore.
But be sure it's from Computers for All – the shop where people matter.
Call now, write or phone.
1983 will definitely be the year of the computer.
Make sure you start it right.
INSTANT CREDIT AVAILABLE FOR CALLERS WITH CHEQUE OR CREDIT CARD

Post today, phone, or call at our shop
Post to Computers for All (Y), 72 North Street, Romford, Essex. Telephone: (0708) 752862.

Please rush me the following equipment:

..... ORIC 48K	@ £169.95 (inc VAT)	..... MPF II	@ £270.00 (inc VAT)
..... BBC MICRO (B)	@ £399.00 (inc VAT)	..... ATARI 400	@ £199.95 (inc VAT)
..... DRAGON 32	@ £199.50 (inc VAT)	..... ATARI 800	@ £399.95 (inc VAT)

Please add Post and Packing @ £3.00.

DRAGON CARTRIDGES		DRAGON CASSETTES	
Ghost Attack	@ £24.95 ea	Compendium of Games	@ £7.95 ea .....
Berserk	@ £19.95 ea	Comp. of applications	@ £7.95 ea .....
Meteoroids	@ £19.95 ea	Quest	@ £7.95 ea .....
Cosmic Invaders	@ £19.95 ea	Madness & the Minotaur	@ £7.95 ea .....
Cave Hunter	@ £19.95 ea	Computavoice	@ £7.95 ea .....
Tube Frenzy	@ £19.95 ea	Graphic Animator	@ £7.95 ea .....
Starship Chameleon	@ £19.95 ea	Mazerace	@ £7.95 ea .....
Personal Finance	@ £19.95 ea		

NAME .....

ADDRESS .....

.....

I enclose cheque/P.O. to the value of £ ..... made payable to COMPUTERS FOR ALL. Please bill my Access/Barclaycard/Visa/Mastercharge/Amex No:

COMPUTERS FOR ALL

"THE SHOP WHERE PEOPLE MATTER"

INTEREST FREE

On Atari, VIC 20, Commodore 64 and

If your order contains over £120 worth of computer hardware apply now for interest free credit by telephoning: Mail-order: (0702) 552911. London Shop: 01-748 0926. Birmingham Shop: 021-356 7292. Southend Shop: 0702 554000 or write to P.O. Box 3, Rayleigh, Essex SS6 8LR.

You pay 10% down, then 10% per month for a further nine months (to nearest penny). Example: VIC20 Colour Computer. Cash Price £169.99. Credit terms: £16.99 down then £17 per month for nine months: Total £169.99. Credit quotations on request.

THE NEW COMMODORE 64

The incredible new computer from Commodore comes with 64K RAM fitted! Plus 16 colours, hi-res graphics, 320 x 200 pixels, 40 columns by 25 lines, Z80 micro processor can be added — that means you can run CP/M software, 8 independently movable Sprites with collision detection, and a sound generator with 3 voices, 4 waveforms, envelope and filter to rival some dedicated music synthesisers. And all this at the most incredible price ever.

(AF56L) Only £339.00

DRAGON 32

The amazing new British computer with a full-travel standard keyboard, a 16-bit microprocessor, 32K RAM fitted (expandable to 64K and later to 256K!!), 9 colours, hi-res graphics and Microsoft extended colour BASIC (the very best BASIC to learn with). It can be used with virtually any ordinary cassette recorder, it has a printer interface (Centronics-type), joysticks are available and it's incredible value for money. **(AF57M) Only £199.50**

THE AMAZING ATARI COMPUTERS

4 Consoles Available:

Atari 400 with 16K RAM (AF36P) £249.95

Atari 400 with 48K RAM (AF37S) £319.00

Atari 800 with 16K RAM (AF02C) £399.00

Atari 800 with 48K RAM (AF55K) £440.00

★ All above with BASIC & handbooks

Other hardware:

Cassette Recorder	(AF28F)	£50.00
Disk Drive	(AF06G)	£299.95
Thermal Printer	(AF04E)	£265.00
Epson MX80T Mk III	(AF38R)	£399.95
Epson MX80F/T Mk III	(AF40T)	£447.35
Printer Interface for 400	(AF41U)	£59.95
Printer Interface for 800	(AF42V)	£59.95
Interface Module	(AF29G)	£135.00
Versawriter	(AF43W)	£199.95
16K RAM Module	(AF08J)	£55.00
48K RAM Module for 400	(AF44X)	£125.35
48K Upgrade for 400	(AF45Y)	£75.00
Floppy Disk	(YX87U)	£2.50
Le Stick	(AC45Y)	£24.95
Joystick Controllers (Pair)	(AC37S)	£13.95
Paddle Controllers (Pair)	(AC30H)	£13.95

For full details ask for our hardware leaflet (XH54J) SAE appreciated

JOIN THE U.K. ATARI COMPUTER OWNERS' CLUB

An independent users' group. Four issues of the club magazine for only £3.00! Address your subscription to Ron. issue 1 of the club magazine featured a tutorial on character set redefinition and contained a collection of demonstration and games programs and lots more. Issue 2 featured a tutorial on player/missile graphics, an article about graphics on computers, a selection of members' contributions to the program library and much more.

THE FINEST SELECTION OF ATARI SOFTWARE

Teach Yourself Programs

Conversational French	-5C-16K-YG44X £39.95
Conversational German	-5C-16K-YG45Y £39.95
Conversational Spanish	-5C-16K-YG46A £39.95
Conversational Italian	-5C-16K-YG47B £39.95
Touch Typing	-2C-16K-YG49D £15.95
States & Capitals	-1C-16K-YG56L £9.95
Euro. Countries & Capitals	-1C-16K-YG57M £9.95
Kids 1 (3 Programs)	-1C-16K-BG00A £9.95
Kids 1 (3 Programs)	-1D-24K-BG01B £9.95
Kids 2 (3 Programs)	-1C-16K-BG02C £9.95
Kids 2 (3 Programs)	-1D-24K-BG03D £9.95

Learn Programming

Invitation To Programming 1	-1C-8K-YG43W £15.95
Invitation To Programming 2	-2C-8K-BG67X £22.95
Invitation To Programming 3	-2C-8K-BG68Y £22.95
Basics Of Animation	-1C-16K-BG57M £11.95
Basics Of Animation	-1D-24K-BG58N £11.95
Player Missile Graphics	-1C-32K-BG59P £18.95
Player Missile Graphics	-1D-32K-BG60Q £18.95
Display Lists	-1C-16K-BG51F £11.95
Display Lists	-1D-24K-BG52G £11.95
Horiz./Vert. Scrolling	-1C-16K-BG53H £11.95
Horiz./Vert. Scrolling	-1D-24K-BG54J £11.95

Page Flipping	-1C-16K-BG55K £11.95
Page Flipping	-1D-24K-BG56L £11.95
Sounds & Music	-1C-16K-BG04E £11.95
Sounds & Music	-1D-24K-BG05F £11.95
Tricky Tutorials	-3C-32K-BG06G £59.95
Tricky Tutorials	-3D-32K-BG07H £59.95

Business Programs

Visicalc	-1D-32K-YL39N £119.95
Atari Word Processor	-1C&3D-48K-YG42V £99.95
Text Wizard	-1D-32K-BG99W £69.95
Mini Word Processor	-1C-32K-BG08J £11.95
Mini Word Processor	-1D-32K-BG09K £11.95
Calculator	-1D-24K-YG58 £16.95
Graph-It	-2C-16K-YG51F £13.95
Statistics	-1C-16K-YG52G £13.95

Personal Financial Management

	-3D-32K-BG65V £49.00
Mortgage & Loan Analysis	-1C-16K-BG66W £12.95
Bob's Business	-1C-32K-BG11M £9.95
Bob's Business	-1D-32K-BG12N £9.95

Adventure Games

Galactic Empire	-1C-32K-BG14Q £14.95
Rescue At Rigel	-1C-32K-BG21X £22.45

Rescue At Rigel	-1D-32K-BG80B £22.45
Datestones Of Ryn	-1C-32K-BG22Y £14.95
Datestones Of Ryn	-1D-32K-BG82D £14.95
Star Warrior	-1C-32K-BG24B £28.95
Star Warrior	-1D-32K-BG78L £28.95
Invasion Orion	-1C-24K-BG23A £18.95
Invasion Orion	-1D-32K-BG81C £18.95
Star Trek 3.5	-1C-32K-BG15R £14.95
Star Trek 3.5	-1D-40K-BG26D £18.95
Crush, Crumble & Chomp	-1C-32K-BG83E £22.45
Crush, Crumble & Chomp	-1D-32K-BG84F £22.45
Mission Asteroid	-1D-40K-BG91Y £17.19
Wizard & The Princess	-1D-40K-BG25C £21.78
Ulysses & The Golden Fleece	-2D-40K-BG92A £20.64
Zork I	-1D-32K-BG94C £29.95
Zork II	-1D-32K-BG95D £29.95
Ali Baba & The 40 Thieves	-1D-32K-BG78K £27.95
Temple Of Apshai (Part 1)	-1C-32K-BG85G £28.95
Temple Of Apshai (Part 1)	-1D-32K-BG86T £28.95
Upper Reaches Of Apshai (Part 2)	-1C-32K-BG87U £14.95
Upper Reaches Of Apshai (Part 2)	-1D-32K-BG88V £14.95
Curse Of Ra (Part 3)	-1C-32K-BG89W £14.95

Curse Of Ra (Part 3)	-1D-32K-BG90X £14.95
Analog Adventure	-1D-32K-BG33L £16.95
Adventure Land	-1C-24K-BG00A £14.95
Pirates Adventure	-1C-24K-BG01B £14.95
Mission Impossible	-1C-24K-BG02C £14.95
Voodoo Castle	-1C-24K-BG03D £14.95
The Count	-1C-24K-BG04E £14.95
Strange Odyssey	-1C-24K-BG05F £14.95
Mystery Fun House	-1C-24K-BG06G £14.95
Pyramid Of Doom	-1C-24K-BG07H £14.95
Ghost Town	-1C-24K-BG08J £14.95
Savage Island I	-1C-24K-BG09K £14.95
Savage Island II	-1C-24K-BG10L £14.95
Golden Voyage	-1C-24K-BG11M £14.95
Sellsoft Adventure	-1D-40K-BG93B £20.64
Deadline	-2D-32K-BG96E £34.95
The Shattered Alliance	-1D-48K-BG98G £29.95
The Battle Of Shiloh	-1C-40K-BG63T £29.95
The Battle Of Shiloh	-1D-40K-BG97F £29.95
Energy Czar	-1C-16K-YG53H £9.95
Kingdom	-1C-8K-YG55K £9.95
Space Shuttle Module 1	-1D-32K-BG85V £19.95

Arcade Games

Star Raiders	-1E-8K-YG66W £29.95

CREDIT

Dragon 32 computer hardware

(Subject to approval which can take up to 48 hours) (APR = 0%)





ATARI SOFTWARE continued

Asteroids	-1E-8K-YG60Q £29.95
Space Invaders	-1E-8K-YG70M £29.95
Missile Command	-1E-8K-YG64U £29.95
Caverns of Mars	-1D-16K-BG69A £24.50
K-Razy Shoot Out	-1E-8K-BG63T £29.95
K-Razy Kritters	-1E-8K-BG51F £29.95
K-Star Patrol	-1E-8K-BG32G £29.95
Pathfinder	-1D-32K-BG33L £27.95
Crossfire	-1C-16K-BG22Y £20.64
Crossfire	-1D-32K-BG23A £20.64
Protector	-1C-32K-BG24B £21.80
Protector	-1D-32K-BG25C £21.80
Threshold	-1D-40K-BG18U £27.54
Deluxe Invaders	-1D-16K-BG34M £29.95
Galactic Chase	-1C-16K-BG62S £16.95
Galactic Chase	-1D-16K-BG61R £19.95
Race In Space	-1C-16K-BG39Q £14.95
Race In Space	-1D-16K-BG20W £16.95
Space Chase	-1C-16K-BG42V £10.95
Space Chase	-1D-24K-BG43W £12.95
Centipede	-1E-16K-BG70W £29.95
Angle Worms	-1C-8K-BG50E £10.95
Lunar Lander	-1C-24K-BG16S £10.95
Lunar Lander	-1D-24K-BG49D £14.95
Jumbo Jet Lander	Available November
Submarine Commander	Available November
Rasterblaster	-1D-32K-BG35Q £22.95
Shooting Gallery	-1C-16K-BG36P £14.95
Shooting Gallery	-1D-16K-BG19V £16.95
Shooting Arcade	-1C-16K-BG15R £24.95
Shooting Arcade	-1D-16K-BG14S £24.95
Super Breakout	-1E-6K-YG67X £24.50
Dodge Racer	-1C-16K-BG29G £19.95
Dodge Racer	-1D-24K-BG30H £19.95
Matchracer	-1C-16K-BG31J £23.95
Matchracer	-1D-16K-BG32K £23.95
Mouskattack	-1D-32K-BG77J £22.95
Jawbreaker	-1C-16K-BG17T £20.64
Jawbreaker	-1D-32K-BG26D £20.64
Ghost Hunter	-1C-16K-BG64U £19.95
Pac-Man	-1E-8K-BG71N £29.95
Pacific Coast Highway	-1C-16K-BG13F £24.95
Pacific Coast Highway	-1D-16K-BG14G £24.95
Chicken	-1C-16K-BG27E £21.80
Chicken	-1D-16K-BG28F £21.80
Tumble Bugs	-1D-24K-BG46A £24.95
Bug Attack	-1C-24K-BG36F £23.95
Bug Attack	-1D-40K-BG37S £23.95
Canyon Climber	-1C-16K-BG44X £24.95
Canyon Climber	-1D-16K-BG45Y £24.95
Mountain Shoot	-1C-16K-BG12A £10.95
Haunted Hill	-1C-16K-BG38R £16.95
Haunted Hill	-1D-16K-BG39K £19.95
Time Bomb	-1C-16K-BG40T £10.95
Time Bomb	-1D-24K-BG41U £12.95
Tank Trap	-1C-16K-YL34M £9.95
Tank Trap	-1D-32K-YL35Q £12.95
Thunder Island	-1C-16K-BG37S £10.95

Home Game Programs

Strain	-1C-16/24K-YG58N £17.50
Basketball	-1E-8K-YG61R £24.50
Cypher Bowl	-1D-16K-BG20W £29.50
Sunday Golf	-1C-16K-BG13P £10.95
Darts	-1C-16K-BG42V £19.95
Tournament & 8-Ball Pool	-1C-16K-BG44Y £19.95
Snooker & Billiards	-1C-16K-BG44X £19.95
Ricochet	-1C-16K-BG47B £14.95
Ricochet	-1D-32K-BG48C £14.95
Computer Chess	-1E-8K-YG63T £24.50
Fast Gammon	-1C-8K-YL33L £16.95
Gomoku	-1C-16K-BG18U £14.95
Gomoku	-1D-16K-BG55K £19.95
Reversi	-1C-16K-BG19V £14.95
Reversi	-1D-16K-BG54J £19.95
Cribbage & Dominoes	-1C-16K-BG43W £14.95
Poker Solitaire	-1C-16K-BG17T £10.95
Poker Solitaire	-1D-16K-BG53H £14.95
Blackjack	-1C-8K-YG62S £9.95
Hangman	-1C-8K-YG84J £9.95
Super Cubes & Tilt	-1C-16K-BG48C £14.95
Humpty Dumpty & Jack & Jill	
Hickory Dickory Dock & Baa Baa Black Sheep	-1C-16K-BG39N £19.95
British Heritage Jigsaw Puzzles	-2C-16K-BG40T £19.95
European Scene Jigsaw Puzzles	-2C-16K-BG41U £19.95
Video Easel	-1E-8K-BG72P £24.50
Micro Painter	-1D-48K-BG56L £29.95

Music Programs

Music Composer	-1E-8K-YG48C £35.95
Movie Themes	-1C-8K-BG34M £9.95

Computer Languages

Assembler	-1C-16K-YL32K £19.95
Assembler Editor	-1E-8K-YG68Y £39.95
Macro Assembler	-1D-32K-BG73Q £59.95
Basic A+	-1D-48K-BG31J £49.95
Basic A+ & Operating System A+	-1D-48K-BG32K £99.50
Microsoft Basic	-1D-32K-BG74R £59.95
Pilot (Educator)	-1E & 2C-16K-BG75S £79.95
Pilot (Consumer)	-1E-8K-YG69A £54.00
QS Forth	-1D-24K-YL29G £49.95
Tiny-C	-1D-48K-BG62S £64.95
Inter-Logo/65	-1D-48K-BG61R £87.00

Utilities
Programming Aids Package 1

	-1C-16K-BG60Q £ 9.95
6502 Disassembler	-1C-8K-YL30H £9.95
6502 Disassembler	-1D-8K-YL31J £12.95
Atari World	-1D-40K-BG27E £43.95
3D Supergraphics	-1C-40K-BG29G £28.95
3D Supergraphics	-1D-40K-BG28F £29.95
File-It 2	-1D-48K-BG10L £34.95
Filemanager 800	-1D-40K-BG59P £72.80
K-DOS	-1D-32K-BG76H £49.95
Disk Manager	-1D-32K-BG58N £21.80
Disk Detective	-1D-16K-BG57M £24.95
Operating System A+	-1D-32K-BG30H £49.95
Telelink	-1E-8K-YG65P £21.50
The Next Step	-1D-32K-BG84U £27.54

Books

Master Memory Map	-XH57M £4.00
De Re Atari	-WG56L £16.95
Operating System User's Manual & Hardware Manual	-WA46A £16.95
Atari Basic Learning By Using	-WG55K £5.24
Games For The Atari	-WA47B £4.45
Atari Basic	-WG05F £6.80
Atari Sound & Graphics	-WA39K £8.25
Your Atari Computer	-WA40T £13.45
6502 Assembly Language Subroutines	-WA05F £12.45
Advanced 6502 Interfacing	-WA41U £11.45
Beyond Games (6502)	-WA49Y £13.00
Computers For People	-WA00A £8.25
Analog: The Magazine For Atari (6 issues) Annual Subscription	-GG24B £9.00

Send sae now for our new software leaflet with details of all the above programs.

Order As XH52G — Issue 3.

Key: C = Cassette. D = Disk. E = Cartridge
2C = 2 Cassettes etc. 8K, 16K shows minimum memory requirement.

Note: Order codes shown in brackets. Prices correct at time of going to press. (Errors excluded).

VIC20 COLOUR COMPUTER

Hardware

VIC20 Console	(AF478) £169.99
C2N Cassette Unit	(AF48C) £44.95
VIC Printer	(AF490) £230.00
VIC Disk Drive	(AF50E) £396.00
3K RAM Cartridge	(AF51F) £29.95
8K RAM Cartridge	(AF52G) £49.95
16k RAM Cartridge	(AF53H) £74.95

Joysticks and Paddles

Single Joystick	(AC53H) £7.50
Pair of Joysticks	(AC37B) £13.95
Le Stick	(AC45Y) £24.95
Pair of Paddles	(AC30H) £13.95

Programming Aid Cartridges

Super Expander: 3K RAM and Hi-res graphics	(AC54J) £34.95
Programming Aid: Additional commands, function Key programming etc.	(AC55K) £34.95
Machine Code Monitor	(AC56L) £34.95

Software (all 3K unless stated)
Introduction to BASIC Cassettes

Part 1	(AC57M) £14.95
Part 2	(AC58N) £14.95

Game Programs

Avenger Cartridge	(AC59P) £19.95
Star Battle Cartridge	(AC60Q) £19.95
Super Slot Cartridge	(AC61R) £19.95
Jelly Monsters Cartridge	(AC62S) £19.95
Alien Cartridge	(AC63T) £19.95
Super Lander Cartridge	(AC64U) £19.95
Road Race Cartridge	(AC65V) £19.95
Rat Race Cartridge	(AC66W) £19.95
Blitz Cassette	(AC67X) £4.99
Mole Attack Cartridge	(AC85G) £24.95
Adventureland Cartridge	(AC86T) £24.95
Pirate Cove Cartridge	(AC84F) £24.95
Mission Impossible Cartridge	(AC87U) £24.95
Voodoo Castle Cartridge	(AC88V) £24.95
The Count Cartridge	(AC89W) £24.95
Sargon 2 Chess Cartridge	(AC77J) £24.95
Golf Cartridge	(AC90X) £24.95
Omega Race Cartridge	(AC91Y) £24.95
Another VIC in The Wall Cassette	(AC78K) £7.00
VIC Panic Cassette	(AC79L) £7.00
Cosmiads Cassette	(AC80B) £7.00
Backgammon Cassette (+3K)	(AC81C) £7.00
VIC-Men Cassette	(AC82D) £7.00
VIC Asteroids Cassette	(AC83E) £7.00

Business Programs

Simplicalc Disk (+16K)	(AC92A) £24.95
Simplicalc Cassette (+16K)	(AC93B) £19.95
VIC Stock Control Cassette (+8K)	(AC94C) £19.95
VIC File Disk (+16K)	(AC95D) £24.95
VIC Writer Disk (+8K)	(AC96E) £24.95
VIC Writer Cassette (+8K)	(AC97F) £19.95

Education (CSE & GCE 'O' Level Revision)
All cassette based and require at least 8K expansion memory.

English Language	(AC98G) £9.99
Mathematics 1	(AC99H) £9.99
Mathematics 2	(BC00A) £9.99
Biology	(BC01B) £9.99
Chemistry	(BC02C) £9.99
Physics	(BC03D) £9.99
Computer Studies	(BC04E) £9.99
Geography	(BC05F) £9.99
History	(BC06G) £9.99
Arithmetic for 9 to 11 year olds	(BC07H) £9.99
Reading for 9 to 11 year olds	(BC08J) £9.99
General Knowledge for 9 to 11 year olds	(BC09K) £9.99
Spelling for 9 to 11 year olds	(BC10L) £9.99

Home Programs
All cassette based and require at least 8K expansion memory

Quizmaster	(BC11M) £9.99
Know Your Own IQ	(BC12N) £9.99
Junior IQ	(BC13P) £9.99
Know Your Own Personality	(BC14Q) £9.99
The Robert Carrier Family Menu Planner	(BC15R) £9.99
VIC Money Manager	(BC16S) £9.99
VIC Road User & Highway Code	(BC17T) £9.99
Garden Planner	(BC18U) £9.99
Interior Designer	(BC19V) £9.99
BBC "Ask The Family"	(BC20W) £9.99
BBC 'Mastermind'	(BC21X) £9.99
'Mastermind' additional General Knowledge Data 1	(BC22Y) £2.50
Data 2	(BC23A) £2.50
Data 3	(BC24B) £2.50
Data 4	(BC25C) £2.50
'Mastermind' additional Specialist Knowledge Wine & Food	(BC26D) £2.50
Music	(BC27E) £2.50
Sport & Games	(BC28F) £2.50
Films & TV	(BC29G) £2.50

Books About VIC

Learn Programming on the VIC	(WA31J) £2.50
VIC Revealed	(WA32K) £10.00
VIC Programmers Reference Guide	(WA33L) £9.95
VIC Graphics	(WA48C) £10.00

Maplin Electronic Supplies Ltd., P.O. Box 3, Rayleigh, Essex. Tel: Southend (0702) 552911/554155.

Demonstrations at our shops NOW. See the computers in action at 159-161 King St., Hammersmith W6. Tel: 01-748 0926
284 London Road, Westcliff-on-Sea, Essex. Tel: (0702) 554000
Lynton Square, Perry Barr, Birmingham: Tel: (021) 356 7292.

South London's Largest MicroComputer Centre

VISION STORE

THE AMAZING ORIC-1 Colour Computer

* 40 Columns × 28 rows.
* Microsoft Basic Language.
* 8 Foreground + 8 Background Colours.
* Built-in Sound Synthesiser.
* High Res Graphics.
* Teletext-Prestel Compatible.

Come in for a Demonstration.

16K Microsoft Basic	Phone!
32K Microsoft Basic	**£139.95**
48K Microsoft Basic & Forth	**£169.95**

DRAGON 32K

— Limited Stocks Available.
New Software coming in all the time.

New Vic Software

Krazy Kong!
Dodge Kong's barrells as you climb the stairs.
STD VIC. Joysticks. **£6.99**

Exterminator!
Blast the centipede while dodging the spider amongst the toadstools. Fast action.
STD VIC. Joysticks. **£6.99**

Anti-splatter-matter!
Make space invaders look like childs play, superb graphics. STD VIC. Joysticks. **£6.99**

Vikman
Choose one to three ghosts.

STD VIC. Joysticks	**£6.99**
Escape (Labyrinth)	**£6.99**
Dodge Cars	**£6.99**
Bomber	**£6.99**
Invasion	**£6.99**
Raceway	**£6.99**
Alien Panick	**£6.99**
Quirck	**£6.99**
Target	**£6.99**
Search	**£6.99**
New EMI Cartridges	
River Rescue	**£24.95**
Music Composer	**£24.95**

Send for VIC price list.

New Atari Software

Shamus	C/D	**£21.80**
Preppie	C/D	**£19.95**
Beta Fighter	C	**£18.50**
Mouskattack	D	**£31.50**
Hazard Run	C	**£21.50**
Jumbo Jet Pilot	Rom	**£35.95**
Golden Gloves	C	**£20.50**
Pacific Coast Highway	C/D	**£21.80**
Canyon Climber	C/D	**£21.80**
Choplifter	D	**£25.50**
My First Alphabet	D	**£29.95**
Rasterblaster	D	**£22.95**
Submarine Commander	Rom	**£35.95**
Slime	C/D	**£21.80**
Rearguard	C/D	**£15.50**
Micropainter	D	**£25.50**
Shooting Arcade	C/D	**£21.80**
Protector	D	**£21.80**
Nautilus	C/D	**£21.80**
Chicken	C/D	**£21.80**
Frogger	C/D	**£31.50**
Crush, Crumble, Chomp	C/D	**£22.95**
Temple of Apshai	C/D	**£30.95**
EMI Darts	C	**£19.95**
EMI Soccer	Rom	**£29.95**

All Prices Inc. VAT.

In Stock Now

COMMODORE 64

64k £345.00

Vic 20 5k **£137.95** 21k **£185.95**
*includes 5 Free programmes.
Vic Cassette **£44.00** Vic Disk Drive New
Vic Printer **£229.00** Low Price **£299.95**
16K RAM Pack **£49.95**

New

Commodore 64
64K Colour Computer
in stock now **£345**

Main Commodore
Dealer for: New 500 series
New 700 series
Business Computers.

Sinclair ZX81 £49.95

Sinclair SPECTRUM Phone for availability

Cased typewriter keyboard **£29.95**
16K RAM **£29.95** Printer **£59.95**

We offer excellent part exchange deals or cash for your old machine.

All Prices inc. VAT.

ATARI 400

16K £199.95	32K £249.95
Less Basic	Less Basic

Basic Cartridge £34.90

48k Up Grade for Atari 400	**£73.50**
Atari 800 16K inc. Basic	**£399.00**
Atari 800 48K	**£469.95**
Atari 410 Cassette	**£49.00**
Atari 810 Disk Drive	**£299.00**
Atari 822 Printer	**£199.95**

Plus Daisy Wheel and Dot Matrix printers for the Atari range.

New

Atari 400
Typewriter keyboard.
Direct easy replacement for standard keyboard
£78.95

Now available
EMI Submarine Commander.
EMI Jumbo-Jet Lander.
Incredible Games for Atari.

Over 900 software programmes always in stock. We carry probably the widest range with continuous demonstrations.

Mail Order — send for our comprehensive list.

Instant Credit Available subject to status

Access/ Barclaycard

VISION STORE **3 Eden Walk Precinct, Kingston-on-Thames, Surrey. Tel: 01-546 8974**

LET YOUR MICRO TAKE OFF WITH GEMINI

USING GEMINI FUNCTIONAL CASSETTE SOFTWARE FOR JUST £19.95

Fully compatible with

TI – 99/4A
VIC 16K
Oric
Dragon 32
SHARP MZ – 80K/A/B
BBC Micro
Sinclair Spectrum
ATARI 400/800

Here's the software to run your budgeting, your business, your stamp collection, your car costs . . . even to plan your next meal and help you choose a wife. Tested programs that come with all the documentation back-up you need from Gemini who are experts in practical software. So mail us the coupon – and put your micro to work . . . fast.

SPECIAL LIMITED OFFER
Any 3 programs at £19.95 for the price of two with all orders received before 31st March 1983.

DATABASE The Program that everyone needs. Facilities include sort, search, list, delete, change, totals, save file, line print if required, etc. etc. Can be used in place of any card index application. **£19.95**

STOCK CONTROL All the necessary for keeping a control of stock. Routines include stock set up, user reference no., minimum stock level, financial summary, line print records, quick stock summary, add stock, delete/change record and more. **£19.95**

MAILING LIST A superb dedicated database to allow for manipulation of names & addresses & other data, with selective printing to line printer. Features include the facility to find a name or detail when only part of that detail is known. Will print labels in a variety of user-specified formats. **£19.95**

INVOICES AND STATEMENTS Ideal for the small business. A complete suite of programs together with generated customer file for producing crisp and efficient business invoices and monthly statements on your line printer. All calculations including VAT automatic and provision for your own messages on the form produced. *Not Spectrum **£19.95**

COMMERCIAL ACCOUNTS A gem of a program, all for cassette, with the following features:–
Daily Journal • Credit Sales • Cash Sales • Credit Purchases • Purchases – other • Sales Ledger • Purchase Ledger • Bank Account • Year to Date Summary
A fully interactive program suitable for all businesses. Files can be saved and loaded and totals from one file carried forward to another on cassette. Particularly useful from a cash flow point of view, with an immediate accessibility to totals for debtors and creditors. Bank totally supported with entries for cheque numbers, credits and, of course, running balance. **£19.95**

HOME ACCOUNTS Runs a complete home finance package for you with every facility necessary for keeping a track of regular and other expenses, bank account, mortgage, H.P. etc. etc. etc! You'll wonder how you ever managed without it. **£19.95**

Gemini Marketing Limited.
Functional Software Specialists
9, Salterton Road Exmouth, Devon.
Telephone orders welcome. (03952) 5832
Please quote Access/Diners Card Number

For Functional Software

Dealer Enquiries Welcome

ZX81 16K – Database available – Only £7.50 including FREE Decision Maker Programme.

GEMINI MARKETING LIMITED

Tick the box for Program you require. Prices include V.A.T and Package and Postage.
Please supply the following cassette software.

Database	£19.95	☐
Stock Control	£19.95	☐
Mailing List	£19.95	☐
Invoices and Statements	£19.95	☐
Commercial Accounts	£19.95	☐
Home Accounts	£19.95	☐
ZX81 16K Database	£7.50	☐

Name _____
Address _____
Machine Type _____ Memory Size _____
I enclose _____
Make cheques and postal orders payable to Gemini Marketing Ltd.

Diners Card Number _____ Access Number _____
Signature: _____

Gemini. Functional Software Specialists 9, Salterton Road, Exmouth, Devon. (03952) 5832
Telephone orders welcome. Please quote Access/Diners Card Number

YC02

Tonight On Your Micro

CAN YOU SURVIVE PENETRATOR?

PENETRATOR is the most amazing and sophisticated arcade game yet devised for the 48K Spectrum. Features include training mode, unique customizing, superior graphics, excellent sound and more! Cassette £6.95.

RESCUE A VIC PRINCESS

A multi-part adventure for the standard VIC 20! All you have to do is find the castle, defeat the dragon, find your way through the labyrinth, kill the wizard and rescue the Princess. And that's not half of it! THE WIZARD & THE PRINCESS cassette only £5.95.

CONVERT YOUR VIC INTO AN ARCADE MACHINE

Amazing arcade action for the standard VIC 20 with 5 new exciting games from Clifford Ramshaw: ALIEN BLITZ*, INVADERS*, GROUND ATTACK, STORM and SPACE ROCKS* (games marked * contain machine code). You must have the VIC GAMES PACK cassette - only $5.95.

THE HOBBIT IS HERE!

Experience the fantasy of J. R. Tolkien's "HOBBIT" on your 48K Spectrum. Danger, adventure and excitement are all part of it in words and graphics, but it is you who must solve the problems. Special features never seen before. THE HOBBIT is the program everyone is talking about £14.95.

MELBOURNE HOUSE PUBLISHERS

Orders to: 131 Trafalgar Road, Greenwich, London SE10

Correspondence to: Glebe Cottage, Station Road, Cheddington, Leighton Buzzard, BEDS LU7 7NA

Trade enquiries welcome.

☐ Please send me your free catalogue.

Please send me:

Books

SPECTRUM
- ☐ Understanding Your Spectrum £7.95
- ☐ Spectrum Machine Language For The Absolute Beginner £6.95
- ☐ Over The Spectrum £6.95

VIC 20
- ☐ VIC Innovative Computing £6.95

DRAGON
- ☐ Enter The Dragon £5.95

ZX81
- ☐ Machine Language Made Simple for the ZX80 & ZX81 £8.95
- ☐ Not Only 30 Programs £4.95
- ☐ Understanding Your ZX81 ROM £8.95
- ☐ Complete Sinclair Basic Course £17.50
- ☐ Basic Course cassettes £2.50
- ☐ Complete Sinclair ZX81 Rom Disassembly Part A & B £9.95

Cassettes

16K SPECTRUM
- ☐ Over The Spectrum No. 1 £5.95
- ☐ Over The Spectrum No. 2 £5.95
- ☐ Over The Spectrum No. 3 £5.95
- ☐ Programs from Spectrum Machine Language Book £5.95

48K SPECTRUM
- ☐ Penetrator £6.95
- ☐ The Hobbit £14.95

STANDARD VIC 20
- ☐ VIC Innovative Cassette 1 £5.95
- ☐ VIC Innovative Cassette 2 £5.95
- ☐ VIC Innovative Cassette 3 £5.95
- ☐ VIC Games Pack £5.95
- ☐ The Wizard & The Princess £5.95

All prices include VAT where applicable

£ _____

All Melbourne House cassette software is unconditionally guaranteed against malfunction.
Access orders can be telephoned through on our 24-hour ansafone (01) 858 7397.

Please add 80p for post and pack £ .80

I enclose my cheque/money order for £ _____.

TOTAL £ _____

Please debit my Access card No. _____ Expiry date _____

Signature _____ Name _____

Address _____

Postcode _____ YC2

MELBOURNE HOUSE PUBLISHERS

ATTENTION DRAGON OWNERS

S.W. Winter announce the launch of their exclusive new range of Dragon software

THE RING OF DARKNESS

The first full hi-res graphic adventure game for the Dragon. You create your own character and set off across an enchanted land, entering towns to buy essential goods and daring and depths of vast, monster filled 3D dungeons. Time and experience will lead you to discover the secret quest, if you survive. SAVE GAME FACILITY.

£10.00

DRAGON TREK

An advanced Star Trek game in hi-res colour. Mixed text and graphics, moving klingons, 5 skill levels, onboard computer and REAL TIME INTERACTION will have you zapping klingons till stardate 2475.

£6.99

ARTISTS DESIGNER

Use the Dragon's powerful hi-res graphics in a truly artistic manner. Moving screen cursor, cassette save function and slide show.

£5.99

THE MINSTREL

A graphic music sheet and standard musical notation allow you to compose masterpieces and save them on cassette. ENTERTAINING and EDUCATIONAL.

£5.99

PEPPER'S BASIC GAMES — VOLUMES 1 & 2

A wide selection of entertaining, educating games by Sol Pepper, written in Dragon Basic so you can LIST & LEARN.

£5.99 each volume

Prices include P&P.
Make cheques/POs payable to
S.W. WINTER & CO. LTD.
101 Westminster Bridge Road.
London SE1
Telephone: 01-928 5945 or 01-633 9611

We supply all your Dragon needs

DRAGON 32's IN STOCK NOW £173.00 +VAT.

NEW SPECTRUM AND ZX81 SOFTWARE

"WINGED AVENGER"
Fast and furious. SPECTRUM version has SOUND and USER GRAPHICS. 7 LEVELS, 3 WAVES, MOTHER SHIP, HIGH SCORE, RE-FUELING, RAPID FIRE, SMART BOMBS and LASER SHIELD. PCW "ONE OF THE BEST SINCLAIR GAMES YET". Only £4.50. all SPECTRUM + 16K ZX81.

"SPECTRUM SCRAMBLE"
(CONDITION RED), MORE M/CODE ARCADE ACTION NO LESS than 8 DIRECTIONAL KEYS for a SMOOTH MOVE. Full ARCADE features including, LASERS, BOMBS, INSTANT RESPONSE, CONTINUOUS SCORING ROCKETS, SOUND, FUEL DUMPS, RED METEORS, DEFENDER CRAFT and HIGH SCORE. Beware CONDITION RED. With this one you MOVE, FIRE and BOMB AT THE SAME TIME. Don't waste time waiting for explosions play THE FAST ONE. NEW RELEASE PRICE of £4.95. 16K or 48K SPECTRUM.

"CONDITION RED" ZX81
For ZX81 owners we have released a SCRAMBLE based M/CODE program written by TWO ARCADE GAMERS for home based excitment. SPEED and a very professional presentation. HIGH SCORE TABLE, SHIPS LEFT, FUEL DUMPS, AIRBORNE MISSILES and a very fancy SCROLL. Overcomes many of the ZX81's limitations and produces a good game with RAPID MOVEMENT and FIRE. See for yourself what these two young men have written. JUST £3.95. 16K ZX81.

"AUDIO SONICS"
WINNER of WIZZ KID 82. For the SPECTRUM, A.S. writes sound effects for your own programs. 26 PRESELECTED SOUND EFFECTS include TELEPHONE, POLICE SIREN, FROG, SPACE EFFECTS and OUTBOARD MOTOR. GO into MODIFY and you are presented with a display of SLIDER CONTROLS to adjust PITCH, RISE, FALL, BRISKNESS, DECEL, ACCELL, TONE, REPEAT RATE, STUTTER and DELAY. ADJUST the SLIDERS then INSTANTLY hear the SOUND CREATED. Call "THE SOUND ONE" and a program line will appear that is ready for insertion into your own programs. Hours of EXPLORATION. YOU WILL BE AMAZED what BEEP can DO. We are proud to offer this at £4.99. 16K or 48K SPECTRUM.

"SPECTRUM RENUMBER DELETE"
ALL M/CODE RENUMBERS ALL NOT PART. "YOU WON'T BUY A BETTER RENUMBER PROGRAM FOR THE SPECTRUM" JUST 600 BYTES. At £4.95. ALSO ZX81 VERSION.

"PROGRAMERS DREAM"
A SPECTRUM TOOLKIT. Position independent and just 1450 BYTES. Facilities. RENUMBER lines or blocks any increment or start. BLOCK OR LINE MOVE including a RENUMBER into place if required. BLOCK OR LINE ERASE. CHANGE SELECTED STRINGS (NAMES OR CONTENTS). DUMP variable names and values (usable in a loop). DISPLAY PROGRAM or PROGRAM plus VARIABLE SIZE. INSTANT and CLEARN. JUST £6.95 with explicit instructions.

"DO NOT PASS GO"
Renamed under protest. ZX81 simulation of the BEST SELLING BOARD GAME, PARK LANE and all that. Up to SIX players. ZX81 acts as DICE THROWER, BOARD, RENT COLLECTOR, UNPIRE, BANK, RULE BOOK, ACCOUNTANT and PROPERTY RECORD. no counters, money, board or dice needed. GAME SAVE INCLUDED, with a winner so for REPORT. Complete with instruction booklet. 16K ZX81 at £6.95.

"GREATEST GAMES V1"
This tape is aimed directly at NEW OWNERES. TEN YES 10 games on one tape. Most use M/CODE all worth playing. Written by a user and well written at that. PAC MAZE where living is winning, GOBLER eat the cells dodge the genes, STAR DEFENDER hold on till help arrives, VAMPIRES enter the COUNT the maze is a death trap, SUICIDE no winners just better losers the BLOBS win again, FROGLER good fun this, SOGGY BANKS and FLOATERS, STAR TREKER this is frustration on tape, DICTATOR an old favourite push both BUTTONS and PEASANTS. Also BOMBER bomb your way to a SAFE LANDING. 50p a game makes this the BEST ZX81 value at £5.00. 16K ZX81.

"ADVENTURE IN TIME"
A most extravagant adventure using DATA TRANSFER between programs allowing a 16K ZX81 to run around 60K of adventure. Set in AUSTRALIA . . . Save Mankind . . . Only Way . . . Time Travel . . . Time Machine . . . Warp Back . . . Probe Future . . . Consult Experts . . . Word Search . . . Cave Structure . . . Decipher Symbols . . . An AMBITIOUS MARATHON needing ARITHMETICAL and DIRECTIONAL ABILITY along with REFLEX ACTION, DEDUCTION and above all patience. KEY SECTIONS produce a different game each TIME ensuring a new challenge EACH TIME. HOURS upon HOURS of MENTAL GYMNASTICS for £8.00. 16K ZX81.

"A.D.V.E.N.T."
NOW FOR SOMETHING COMPLETELY DIFFERENT. An Eight part SYSTEM to create GAMES. The SYSTEM has particular relevance to "ADVENTURES" but has capabilities beyond its original function. Develop creative skills like PROGRAM PLANNING, the APPLICATION of LOGIC and GAME CREATION without concern for the technicalities of a computer language which can be learnt later. Included is a MINI ADVENTURE to increase your understanding of the system. Games can be revised after running Programs are SAVED as M/CODE DATA FILES for the MASTER PLAY FILE to operate. BASIC lines 110 and 6500 are available for the user own routines, A.D.V.E.N.T. is the IDEAS PEOPLE. LAUNCH PRICE of just £5.95. 16K ZX81.

"TRADER JACK"
An ADVENTURE TRADING game set in the POLYNESIAN islands of the SOUTH PACIFIC. With £40,000 to buy and fit your your SHIP, purchase PROVISIONS and obtain a CARGO to TRADE on the ISLANDS. The RISKS are yours to take as are the PROFITS. Are you OUTCAST or MILLIONAIRE. Still POORER means WISER and you can surely beat the SYSTEM next TIME. TRADER JACK £5.95. 16K ZX81.

"SPACE TREK"
OH NO NOT THAT AGAIN. Not not quite. Same story only LONGER and BETTER. This one is not at all forgiving JUST ONE MISTAKE and you are NO MORE. COPY short and long range RADAR MAPS to PRINTER. Game length is related to your RANK and the higher levels require many HOURS play. A SECOND GENERATION TREK at £5.00. 16K ZX81.

WORK FORCE (WORKS HARDER)
140, WILSDEN AVE. LUTON. BED. ENGLAND.
U.S.A. USERS WRITE TO
P.O. BOX 441 TITUSVILLE, FLORIDA 32780. U.S.A.
ALSO AVAILABLE AT BUFFER AND MICROWARE.

SUPER QUALITY SOFTWARE FROM LLAMASOFT!!

(DESIGNER — JEFF MINTER)

VIC 20

ABDUCTOR NEW J
A classic new space game! ZAP the swirling alien hordes before they RAM you — and abduct your humanoids! Survive the assault for long enough and you'll get an Extra Stage on your spaceship with DOUBLE FIRE-POWER! Awesome 3.5K action guaranteed **£6.00 + 50p P&P**

GRID RUNNER NEW J
FINALLY: True arcade quality on the unexpanded Vic! Shoot down the segmented DROIDS invading the GRID. Beware of the PODS and ZAPPERS! The awesome speed, sound and graphics gives you the best blast available for unexpanded Vic. **£6.00 & P&P.**

ANDES ATTACT
(8K, REPLACES DEFENDA) NEW J
Your spacecraft must attack the descending aliens and frustrate their evil intent. The game includes swarmers, baiters, pods, landers, bombers, mutants, humanoids and smart bombs. Machine code high resolution colour graphics. Uses joystick controls and requires an 8K or larger expansion. **Only £8.00 + 50p P&P includes full documentation.**

TRAXX M/C (8K EXPANSION) J
This is a VIC 20 cross breed between the now famed 'Packman' and the game 'Quix'. All in machine code, fast and fun with joystick controls, uses Hi-Res colour graphics. 8K or larger expansion needed. **Only £6.00 + 50p P&P complete with instructions.**

THE VERY FIRST COMMODORE 64 GAMES

ATTACK OF THE MUTANT CAMELS
Planet earth needs you! Hostile aliens have used genetic engineering to mutate camels from normally harmless beasts into 90 foot high, neutronium shielded, laser-spitting death camels!! Can you fly your tiny, manoeuvrable fighter over the mountainous landscape to weaken and destroy the camels before they invade the human stronghold! You must withstand withering laser fire and alien UFOs. Game action stretches over 10 screen lengths and features superb scrolling, scanner, 1/2 player actions and unbelievable animation! Play this game and you'll never be able to visit a zoo again without getting an itchy trigger finger! Awesome m/c action!! **£8.50 + 50p P&P**

GRIDRUNNER 64
The No. 1 best game for the Vic has been improved for your COMMODORE 64! Gridrunner is a smash hit in the USA. Now experience the lightning-fast challenge of the grid on the '64. Features 31 skill levels and excellent sound and graphics. Sore trigger finger *free* with every game! **£8.50 + 50p P&P**

ROX-64
Rox is a challenging game involving the defence of your lunar base from a deadly meteor shower. ROX-64 includes amazing sprite graphics displays and spacy sound effects, and an awesome 'mothership' display if you win the game. Top 10 scores are tabled along with their names. This program shows just what can be achieved using only Commodore-64 basic. Study the listing and learn how to use sprites and sound on this outstanding machine. **£4.95 + 50p P&P**

BLITZKRIEG (UNEXP VIC)
As seen at the Commodore show and reviewed by the Daily Telegraph. Fly your Vulcan Bomber over the enemy city and destroy the buildings. 25 levels of play, uses Hi-Res colour graphics and plays Rule Britannia between waves. **Only £4.95 complete with instructions.**

GAME GRAPHICS EDITOR/SOFTKEY (ALL VIC)
Create your very own custom characters for the unexpanded VIC 20, up to 64 characters with facilities such as reflect and save on cassette etc.

SOFTKEY 24
This program, designed to run on the VIC 20 with any memory size gives you the facility of 24 key words on your function keys. Key words include peek, poke, run, save, list, for next etc. Both programs on one cassette **only £6.00 + P&P with full documentation.**

SPECTRUM

GRAPHICS CREATOR (16K)
NOT just another character editor! Allows you to define not only the 21 user definable characters. Also allows you to change the entire 96 character ASCII set. Creates BYTES files ready for you to load into your own programs. Includes advanced Reflect, Invert, Field commands etc. Complete with full documentation. If BIN the BIN statement and use Graphics Creator with its easy on-screen cursor editing. **£2.95 + 50p P&P.**

BOMBER (16K)
Yes, a full feature version of the popular game 'Blitz', supplied for the 16K or 48K Spectrum. **For only £2.95 + 50p P&P.**

HEADBANGER (48K) NEW
Colourful new game starring Chico the headbanger who you must guide to riches through an increasing shower of heavy metal. Gain bonuses for headbanging but be sure to take an aspirin when the pain gets too much! Basic + m/c to speed up action. Great graphics, nice animation. Will even drive William Stuart system's voice synthesiser to produce speech output. Can you attain the grade of 'Rocker Class One' or will you be 'Barry Manilow Class 5'? Start headbanging to-day and find out. **£4.95 + 50p P&P.**

SUPERDEFLEX (48K)
Bounce "Sid", the space invader, around the screen into the power pods, keeping away of course from the devil who chases you around the screen. Steer with your Deflex shields, but beware the mines or your may be buried alive! Superb graphics and fantastic sound on the 48K Spectrum only. **Only £4.95 on cassette + 50p P&P.**

ATARI 400-800

TURBOXFLEX
Superb ultra-fast and totally new ball game. Uses ATARI's unique features to the full. Incorporates superb colour/sound effects and uses Player Missile graphics. Tables top 10 scores along with Scorer's name. **£6.00 + 50p P&P.**

GRAPHICS/CHARACTER CREATOR
Now you can define your own custom character sets, or edit existing sets. Results are fully displayed on screen in modes 0, 1, 2. Special features include reflect, invert, save character sets etc. Supplied on cassette with data sheet **only £6.00 + 50p P&P.**

ZX81

CENTIPEDE (16K)
The ORIGINAL game from the ORIGINAL author. This is the identical program to that being sold by other companies for three times our price. The game has received ecstatic reviews in the computing press. Program has 30 speed levels and ever increasing Centipede hordes. Table top 10 scores and names. Why wait to pay more? **Only £1.95 + 50p P&P.**

J = JOYSTICK CONTROL

LLAMASOFT SOFTWARE



49 Mount Pleasant
Tadley, Hants
RG26 6BN.
Tel: 07356-4478
Trade enquiries welcome.

Please add 50p P&P with all orders

Battle of Britain

By Microgame Simulations for the Spectrum

One day in summer, 1940. Reports are coming in of enemy bomber squadrons crossing the English coast; target unknown.

How are you to deploy the nine fighter squandrons under your command to intercept the incoming threat!

British and enemy squadron movements are plotted on a superb high resolution secreen map of south east England with communications signals presented both visually and in morse code.

Features variable difficulty levels, full control of squadron movements, randomly selected targets and bomber routes for each game, intelligence reports, refuelling etc.

A tense game of strategy for one player.

48K Strategic Wargame

only £5.95 (inc. p&p)

MS

73 The Broadway, Grantchester, Cambridge CB3 9NQ

Buy from us with confidence
Full money-back guarantee on all our products

"Thank you once again for your prompt service; yours must be the most user-friendly company in the business!" G.S. Yorks

"I must congratulate you not only on the quality of your goods but also on your excellent service." G.W. Solihull

Quality software ZX 81 Spectrum BBC Vic-20

GAMES CASSETTES

ZX81 (16K) SUPER INVADERS £4.95
On-screen league tables, animated instructions. Game in machine code — "excellent ... one of the two best ... deservedly popular" (Pop. Comp. Weekly) "Great game!" S.F. Glos.

ZX81 (16K) LYNCHMOB £4.95
Exciting word game. 2-6 players. Excellent for the family. Great fun, educational too! Animation, on-screen scoring. Superb Xmas present.

Spectrum (16K) LYNCHMOB £6.50
As for ZX81 but with added excitement of colour, sound and hi-res animation.

VIC-20 (unexpanded) INVADERS £6.90
Machine code, colour, eight sound effects

BBC ("B") BRIDGEMAN £7.90
The popular gobbler game. Hi-res, colour, sound.

APPLICATIONS SOFTWARE on cassette

ZX81 (1K) GRAPHICS STARTER PACK £4.50
Four 1K Graphics programs on cassette with 12 pp. explanatory manual.

ZX81 (16K) MULTIGRAPHICS £6.90
A user-friendly package of procedures giving you full control of the ZX81 graphics functions to compose designs, drawings, adverts etc. Incorporates advanced sketchpad, 3 sizes of text (including power case), animation, printer output, SAVE displays etc. Businessmen use it to advertise at point-of-sale. 20 pp Manual.

Spectrum (48K) SPECTROGRAPHICS £6.90
Another superb user-friendly graphics program — hi-res and lo-res sketchpads, multisize text, etc. etc.

ZX81 1K STATISTICS £4.00
Mean, SD, variance, correlation, regression, t and F tests. 8 pp Manual includes listings, test data etc.

Spectrum (48K) STATISTICS (price includes maintenance) £9.90
Mean, SD, variance, correlation, regression, t tests. Hi-res graphic displays, data manipulation procedures.

EPHEMERIS ZX81 (16K) ..... £6.90 **Spectrum (16K, 48K)** £7.90
Interested in heavenly bodies? Input date, time and your position. Ephemeris computes altitude, azimuth, phase etc. etc. for sun, moon and planets.

16K RAM pack **Memotech Memopak 16** **£28.50**

Send s.a.e. for details of our products
All-inclusive prices. First Class return-of-post mail in U.K.
European customers add 30p per item; 70p Worldwide (Air Mail)
Available by mail order or from leading computer stores. Trade enquiries welcome.

Dept. YC, 36 Fernwood, Marple Bridge, STOCKPORT, Cheshire SK6 5BE, ENGLAND.

Bridge Software

AMSOFT

THE NEW RANGE OF SOFTWARE DEVELOPMENT TOOLS FOR THE ZX81 AND SPECTRUM USER

Amersham Software Ltd. exists to provide software aids for those users who need to get the most out of their ZX81 and Spectrum computers without using expensive additional hardware.

All **AMSOFT** products are designed to work with standard Sinclair equipment, but can be used to generate code for other devices as well.

AM-ZXFILE is a bulk cassette data handler for the ZX81 BASIC user. Unlimited numbers of data records can be written to, or read from, cassette files, in the same program if you wish. Records can vary in length, and can be blocked together in groups of any size for greater speed. Speed of output is controlled by the user program, and missing data is detected on reading. All output and input is from a BASIC array.
Big machine facilities at £4.00 inc VAT

AM-ZXMON is a complete machine code *operating system* for the ZX81. The user can create, modify, move and verify machine code. He can also run and checkpoint machine code programs. Most important, he can create libraries of machine code routines on tapes, and merge them together, and with new programs, to speed program development.
A first class support system at £6.00 inc. VAT. Spectrum version AM-SPECMON with some facilities will be available from Mid-Feb at £6.50 inc VAT

Under the control of **AM-ZXMON** you can run—

AM-ZXEDIT a text editor primarily designed for creating assembly language source text files on cassettes, for input to the **AM-AZON** assembler. Similar to the BASIC editor, **AM-ZXEDIT** lets you create and amend the programs line by line, and to merge different program cassettes together.
A must at £4.00 inc. VAT

NEW AM-AZON full two pass symbolic assembler running under the control of the monitor AM-ZXMON and producing either directly loadable binary cassettes or relocatable code suitable for the AM-ZXDOC relocating loader. Symbols of up to 5 characters can be used instead of absolute addresses, hex. and decimal constants and text may be used. ABS, ORG, EQU, EXTN, are all provided and the assembler supports all Z80 op. codes. It is impossible to describe this product in a small space.
The best assembler around at £8.00 inc VAT

COMING SOON is **AM-ZXLOC**, a full relocating loader which will merge together routines produced by AM-AZON and relocate them, completing any necessary linkages, giving a binary program. No more manual address changing, no more wasted space.

TO: **AMERSHAM SOFTWARE LTD, LONG ROOF, HERVINES ROAD, AMERSHAM, BUCKS. HP6 5HS.**

Please send me ..... ☐ AM-ZXMON also ..... ☐ AM-ZXEDIT
and ..... ☐ AM-ZXFILE ..... ☐ AM-AZON

I enclose my cheque/postal order for £..... made payable to Amersham Software Ltd.

NAME.....

ADDRESS.....

.....

..... YC02

ZX99

AUTOMATIC TAPE CONTROLLER FOR THE SINCLAIR ZX81

● DATA PROCESSING

The ZX99 gives you software control of up to four tape drives (two for reading, two for writing) allowing merging of data files. This is achieved by using the remote sockets of the tape drives, controlled by USR statements or commands.

● RS232C INTERFACE

The ZX99 has an RS232C output allowing connection with any such printer using the full ASCII character code (you can now print on plain paper in upper or lower case, and up to 132 characters per line) at a variable baud rate up to 9,600

● SPECIAL FEATURES

There are so many special features it is difficult to list them all, for example:

AUTOMATIC TAPE COPY: You can copy a data file regardless of your memory capacity as it is processed through the Sinclair block by block.
TAPE BLOCK SKIP: Without destroying the contents of RAM
DIAGNOSTIC INFORMATION: To assist in achieving the best recording settings.

The ZX99 contains a 2K ROM which acts as an extension to the firmware in the Sinclair ROM. The ZX99's ROM contains the tape drive operating system and the conversion to ASCII for the RS232C output.

There is an extension board on the rear to plug in your RAM pack (larger than 16K if required). The unit is supplied with one special tape drive lead, more are available at £1 each.

Now only £49.95
plus £2·95p+p

● ZX99 SOFTWARE

We now have available "Editor 99", a quality word processing program including mail-merge, supplied on cassette for £9.95. Also following soon:

* Stock Control (October)
* Sales Ledger (November)
* Business Accounts
* Debtors Ledger
* Tax Accounting

Dept. YC5 Data – Assette, 44 Shroton Street, London NW1 6UG. 01-258 0409

---

data-assette
44, Shroton Street
London NW1
Tel 01-258 0409

● FERGUSON CASSETTE RECORDER £28 inc. p&p.

Tested with ZX81, Acorn, BBC, Dragon etc. etc.
Features: Din, Ear, Mic. and Remote sockets, Tape Counter, Tone Control, Built-in Mic., Autostop. Battery/mains. Recommended by Acorn for use with BBC computer.



● STAR DP8480
RS232C (SERIAL) £285 plus £6 Securicor delivery
CENTRONICS (PARALLEL) £265 plus £6 Securicor delivery

This professional printer works with almost any computer with very good upper and lower case typeface.

- Bi-directional
- 80 column width (10" paper)
- Switchable – Tractor or Friction Feed
- 80 chrs. per second

● 2,000 SHEETS OF PRINTER PAPER £19.50 plus £3.50 p&p.

● E690 REVOLVING CASSETTE RACK

Single – **£2.99** (holds 32 tapes or 20 in cases)
Double – **£5.99** (holds 64 tapes or 40 in cases)
Treble – **£8.99** (holds 96 tapes or 60 in cases)
Quad – **£11.99** (holds 128 tapes or 80 in cases)
All plus £1 p&p.

● BBC CASSETTE LEAD

7 pin plug to two 3.5mm plugs and one 2.5mm plug. Only £2 inc. P & P.
Other leads available – please telephone.

COMPUTER CASSETTES

High quality, screw assembled cassettes supplied with library boxes. Any lengths available.

C5 – 35p	C10 – 37p	C12 – 38p
C15 – 39p	C20 – 41p	C25 – 43p
	C30 – 44p	

P&P 10% (min. charge £1.50)

ORDER FORM Dept YC1 Data – Assette, 44 Shroton Street, London NW1 6UG. 01-258 0409

Code	Item	No.	Price	P & P	Total

Cheques/PO made payable to Storkrose Ltd.
Charge my Access/Visa No. .....
Signed _____ Name _____
Address _____

BBC MICRO INSTANT MACHINE CODE!

Yes, it's true. Instant machine code from a good subset of BBC BASIC. Type your BASIC program into your model B BBC Micro, trigger the compiler, and your program is changed almost instantaneously into superfast machine code.
For £34.95 you get: Cassette version of the complete compiler (along with a version of the compiler for use with discs, ready for when you upgrade, the disc version being dubbed on the cassette after the cassette version); complete compiler listing; extensive documentation and instructions. The compiler was written by Jeremy Ruston.

THE BBC MICRO REVEALED

By Jeremy Ruston

'. . .destined to become the bible of all BBC microcomputer users. . .' (Personal Computing Today). If you've mastered the manual, then this book is for you. Just £7.95

LET YOUR BBC MICRO TEACH YOU TO PROGRAM

By Tim Hartnell

'. . .takes you further into the cloudy areas of the BBC machine than anything else I've yet seen. . .' (Computer and Video Games). If you're just starting out in the world of programming, then this book is the one for you. Forty complete programs, including Othello/Reversi, Piano and a host of dramatic graphic demos. Just £6.45

Interface, Dept.YC
44-46 Earls Court Road, London W8 6EJ
Please send me:

( ) INSTANT BBC MACHINE CODE–tape and book–£34.95

( ) THE BBC MICRO REVEALED–Ruston–£7.95

( ) LET YOUR BBC MICRO TEACH YOU TO PROGRAM–Hartnell–£6.45

I enclose £

Name .....

Address .....

SPECTRUM

Make the most of your Spectrum, with these acclaimed books from the experts!

PROGRAMMING YOUR ZX SPECTRUM

Tim Hartnell and Dilwyn Jones

More than 100 routines and programs, 230 pages, and value for every Spectrum user. Learn how to make the most of user-defined graphics (with a Pacman-like program, DOTMAN), sound, colour, and such commands as ATTR, SCREEN$ and BRIGHT. From the co-ordinator of the National ZX Users' Club, Tim Hartnell. Just £6.95.

THE SPECTRUM SOFTWARE LIBRARY

60 GAMES AND APPLICATIONS FOR THE ZX SPECTRUM!

By David Harwood

Arcade games, intelligent board games, brain games and utility programs. They're all here in this massive collection of 60 tested programs for the Spectrum, compiled by Interface columnist David Harwood. Just £4.95.

Interface,
Dept.,YC
44-46 Earls Court Road, London, W8 6EJ
Please send me:

( ) PROGRAMMING YOUR ZX SPECTRUM–£6.95

( ) THE SPECTRUM SOFTWARE LIBRARY–£4.95

( ) A sample issue of INTERFACE, the monthly magazine published by the National ZX Users' Club–£1.00

I enclose £

Name .....

Address .....
.....

WE'VE GOT THE VERY BEST PROGRAMS FOR YOUR SPECTRUM OR ZX81

SOFTWARE SUPERMARKET

"There are some superb ZX games around now - but there's a whole load of rubbish riding on their backs" *(Your Computer)*.

And that's just why we started Software Supermarket last year. From hundreds of programs, we've selected the very best for your Spectrum or ZX81.

Judging by the letters we get from all over the world, our customers are very pleased with our selection service. It's impartial (we produce no programs ourselves). It's free. And it saves you £££'s on stamps and mistakes.

AND WE USUALLY DESPATCH YOUR ORDER WITHIN 48 HOURS. Read on for the best, the very best, Spectrum and ZX81 programs. FREE detailed Top 20 listing with every order!

ZX SPECTRUM .....

S1. **ORBITER** "So fast that lightning reflexes are needed" - *E&C*. Amazing Defender-style program, all in m/code. Full arcade features as you kill the aliens with your laser bolts and smart bombs and rescue the humanoids. (Silversoft) 16/48K. £5.95.

S2. **METEOR STORM** "In some areas it surpasses the arcade original..." *PCW*. "A remarkable feat of programming" - *ZX Comp*. Thrust and fire and hold features, free keyboard overlay - AND IT TALKS TO YOU! (Quicksilva). 16/48K. £4.95.

S3. **TIMEGATE** Breath-taking 4D adventure. "The best graphical game I have seen on any micro" - (Interface). 5 skill levels. Free training program and keyboard overlay. Wipe out the aliens by travelling back through their timegate. Great. (Quicksilva). **48K only.** £6.95.

S4. **GULPMAN** "the one cassette that I would buy ... an exceptional program" - *PCW*. Our best-seller. All m/code. Choose from 9 speeds, 15 mazes, lazer defence and demo run of any maze. (Campbell Systems). 16/48K. £5.95.

S5. **GROUND ATTACK** "Very absorbing game" - *E & C*. Arcade thrills based on 'Scramble'. Pilot your spaceship through 26 zones, destroying missiles, fuel dumps, avoiding aliens. All m/code, good sound and colour. (Silversoft). 16/48K. £5.95.

S6. **ESCAPE** "One of the best and most original games we have seen" - *S.U.* 5 very real dinosaurs chase you round the maze as you search for the axe to escape. "The most amazing thing is the graphics" - *S.U.* (New Generation) 16/48K. £4.95.

S7. **SPECTRES** "Latest twist in the maze game" - *CVG*. Help Eddie light up his mansion: outwit the 4 ghosts. Excellent sound, beautiful graphics. Multi-level. On-screen score, high-score, fuel score, freeze. (Bug-Byte). 16/48K. Well worth £8.00.

S8. **BLACK CRYSTAL** The ultimate role-playing adventure. Quest for the rings of Creation: defeat the Lords of Chaos. Real-time monster battles. Great full-screen graphics. And a MASSIVE 180K OF PROGRAM, in 6 chapters. (Carnell). **48K only.** £7.50.

S9. **VENTURE +3** Ten games for the price of one on this new double-sided cassette. On side A, 7 linked games - can you survive them all and collect the gold? Different each time you play. On side 'B', 3 more games. (Bobker). 16/48K. Ten games for £8.00.

S10. **SPECCHESS** "Artic has beaten Sinclair and Psion" - *S.U.* Clever graphics produce beautiful chessmen. 7 play levels, all legal moves: position analysis for solving chess problems, recommended move and save game. (Artic). **48K only.** £9.45.

ZX 81 + 16K RAM .....

Z1. **FROGGER** Addictive. Great graphics. Moving cars, logs, diving turtles, alligators - watch out for the snake! All m/c. Hall of Fame. Multi-level. Fun and friendly. *(DJL)*. £5.95.

Z2. **TRADER** Our best-seller. "Fantastic 48K graphic adventure" - *S.U.* Loads in 3 x 16K chapters. Simply beautiful. (Pixel). £10.50.

Z3. **ZUCKMAN** "10K of machine code, has all the addictive features of the original" - *S.U.* The first and best ZX81 version. Hi-score, Hall of Fames. *(DJL)*. £5.95.

Z4. **SUBSPACE STRIKER** "Some splendid graphics" - *S.U.* You lurk in hyperspace, captain of the Swordfish, waiting to zap the enemy ships. (Pixel). £5.50.

Z5. **MAZOGS** "Just the sort of program to impress your friends" - *ZX Comp*. "A superb new concept" - *PCW*. Amazing graphic maze game. (Bug Byte). £8.00.

Z6. **WINGED AVENGER** "One of the best Sinclair games yet" - *PCW*. Fast-moving m/code 'Phoenix'. 7 play levels. Clever graphics. (Work Force). £4.50.

Z7. **BLACK CRYSTAL** More variety than any other Sinclair adventure. From the people who did the famous 'Volcanic Dungeon'. Over 100K of program in 7 chapters. (Carnell). £7.50.

Z8. **PILOT** Brilliant flight simulation, written by a pilot. 7 modes, including Autopilot demo. Learn to take off, land, direction find. (Hewson). £5.95.

Z9. **STAR SOCCER** Exciting new soccer simulation. You plan the moves, watch the play. Great high speed graphics. Choose your own real teams! More fun than 'Match of the Day'! (Watson). £5.95.

Z10. **OTHELLO** "Recommended without reserve...a superb opponent" - *YC*. 9 play levels. A great game. (Mol). £6.95.

Please post to: **Software Supermarket, 87 Howards Lane, London SW15 6NZ.**

Please send me the following ..... (No.) programs for my ZX81 16K/Spectrum 16K/Spectrum 48K

I enclose my cheque/PO for £..... made payable to Software Supermarket.

Name .....

Address .....

..... Postcode .....

.....

Please complete carefully in block capitals. If we can't read it, you won't get it. For 1 program, please add 50p p & p. 2 or more programs p & p free.

Foreign orders please add 50p per tape.

Prog No	Program Name	Computer	Price

(YC6)

Add 50p p&p if order is only one tape

Total Order

SOFTWARE SUPERMARKET

Your one-stop shop for the best Sinclair Programs

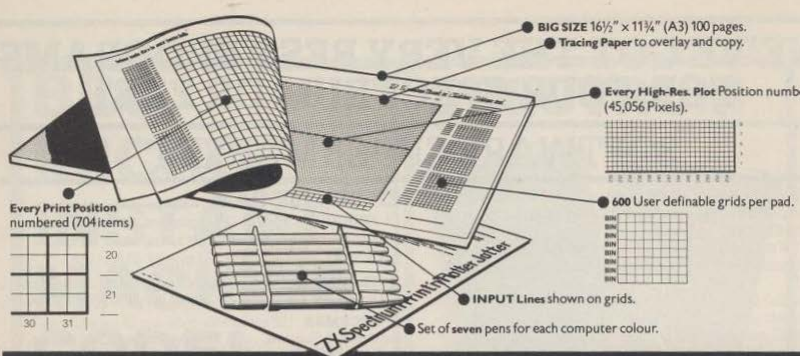

It will improve your ZX SPECTRUM graphics in ways you wouldn't believe possible.

Your new ZX Spectrum is literally packed with sophisticated graphics. Colour. High resolution. Plot. Draw. Circle. Border. Ink. Paper Colours. User-defined characters to name just a few!

That's why we have packed the new Spectrum Print 'n' Plotter Jotter with every facility to exploit your graphics to the full.

After the first few weeks of "playing" with your computer you will want to get down to serious programming and planning in which professional-looking graphics should play a major part.

What better way to work it out than with a Print 'n' Plotter Jotter?

The professional pad

Print 'n' Plotter is not just another programming pad.

Just look at the specifications:

BIG SIZE 16½" × 11¾". 100 Pages — 50 Print Grids and 50 High Resolution Plot Grids.

Printed on high-quality tracing paper, enabling you to overlay the pages for direct co-ordination between PRINT and PLOT or to copy from illustrations, maps, charts, photos etc.

PRINT Grids show all numbered co-ordinates for the 704 screen positions, plus INPUT lines.

PLOT Grids show every numbered co-ordinate for the 45,056 Pixels!

Each pad contains 600 user-definable grids for use with the BIN n, POKE USR "a" function.

And the whole thing is fully bound with fly leaf cover and complete with a set of seven colour pens!

The simple way to get serious

Spectrum Graphics can become very complex, so before you start to program the best way is to work it out on a Print 'n' Plotter and save all those errors!

Take for instance the common CIRCLE. With a Jotter you can establish the exact screen location for the centre in seconds, and it will stop you running out of screen because of a too large radius. Working our DRAW is similar: pre-determine DRAW lines and PLOT positions before you start. With a Jotter you can build-up graphics using every facility with a direct co-ordination between each.

For instance, correct PLOT OVER or PRINT OVER positions will be easy with a Jotter.

See the show for just 95p!

To demonstrate the graphic possibilities with the SPECTRUM JOTTER we have produced a cassette-based Demonstration program for only 95 p (inc VAT and P&P). Why not send for a copy, or order it together with your JOTTER?

Just part of a range of ZX products

The Spectrum Jotter is, of course, an upgraded version of our popular *ZX81 Print 'n' Plotter Jotter and Film*. For ZX81 owners these are available by direct mail or through a growing number of retailers and compshops.

The ZX81 Jotter is a 100 page Graphics pad that exploits to the full the graphics facilities of that micro. ZX81 Film is a matt film version of the Jotter which is re-usable and ideal for 'copying' graphics.

Our manual: "*ZX Graphics programming made easy*" explains everything you need to know about using the ZX81 products, and when used in conjunction with the Spectrum cassette will prove to be the definitive guide to the subject.

And for ZX users (whether Spectrum or ZX81) we still market Printer Paper at £1 less than Sinclairs!

Why not write and place your order today? Graphics can be a very serious subject . . . Print 'n' Plotter products can make it easier . . . and better in a hundred ways you never thought possible!

An illustrated leaflet is sent with all orders. If you require a copy before ordering write enclosing a first class stamp.

To: Print 'n' Plotter Products (YB) 19 Borough High Street, London SE1 Please forward me the following products:

..... ZX SPECTRUM JOTTERS @ £9.95 each.
..... ZX81 JOTTERS @ £3.50 each.
..... ZX81 PLOTTER FILMS @ £2.25 each.
..... "GRAPHICS PROGRAMMING MADE EASY" MANUALS @ £1.50 ea
..... PACKS OF ZX PRINTER PAPER (5 ROLLS) @ £10.95 per pack.
..... ZX SPECTRUM DEMO CASSETTES @ 95 p each.

6th ZX MICROFAIR FEBRUARY 26th NEW HORTICULTURAL HALL LONDON SW1

PLEASE NOTE ALL PRICES INCLUDE POST, PACKING AND VAT FOR U.K. DELIVERIES (Overseas should add 25% for additional Surface Mail)

Remittance enclosed payable to Print'n'Plotter Products.
Please bill my Access/Barclaycard/Visa/Mastercard No:—

Name: .....

Address: .....

.....

.....

Print 'n' Plotter Products©

Most Print 'n' Plotter products are available 'over the counter' from the following retailers. Branches of W. H. Smith ● Buffer Micro Shop, Streatham, London ● Denny's Bookseller, London EC1 ● Georges Bookshop, Bristol ● Telford Electronics & Computing, Hollinswood, Telford ● Personal Computer Services, Darwen, Lancs.

sinclair
ZX Spectrum
BLUE EDIT
RED CAPS LOCK
MAGENTA TRUE VIDEO
GREEN INV. VIDEO
CYAN
YELLOW
WHITE
GRAPHICS
BLACK DELETE
1 DEF FN
2 FN
3 LINE
4 OPEN #
5 CLOSE #
6 MOVE
7 ERASE
8 POINT
9 CAT
0 FORMAT
SIN Q PLOT ASN
COS W DRAW ACS
TAN E REM ATN
INT R RUN VERIFY
RND T RAND MERGE
STR$ Y AND RETURN
CHR$ U OR IF
CODE I AT INPUT IN
PEEK O POKE OUT
TAB P PRINT
READ A STOP NEW
RESTORE S NOT SAVE
DATA D STEP DIM
SGN F TO FOR
ABS G THEN GOTO
SQR H GOSUB CIRCLE
VAL J LOAD VAL $
LEN K LIST SCREEN $
USR L LET ATTR
ENTER
CAPS SHIFT
LN Z COPY BEEP
EXP X CLEAR INK
LPRINT C CONT PAPER
LLIST V CLS FLASH
BIN B BORDER BRIGHT
IN KEY$ N NEXT OVER
PI M PAUSE INVERSE
SYMBOL SHIFT
BREAK SPACE

Sinclair ZX Spectr

16K or 48K RAM... full-size moving-key keyboard... colour and sound... high-resolution graphics...

From only £125!

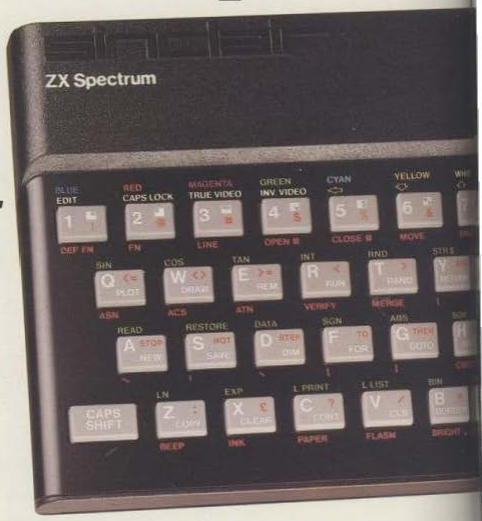

First, there was the world-beating Sinclair ZX80. The first personal computer for under £100.

Then, the ZX81. With up to 16K RAM available, and the ZX Printer. Giving more power and more flexibility. Together, they've sold over 500,000 so far, to make Sinclair world leaders in personal computing. And the ZX81 remains the ideal low-cost introduction to computing.

Now there's the ZX Spectrum! With up to 48K of RAM. A full-size moving-key keyboard. Vivid colour and sound. High-resolution graphics. And a low price that's unrivalled.

Professional power–personal computer price!

The ZX Spectrum incorporates all the proven features of the ZX81. But its new 16K BASIC ROM dramatically increases your computing power.

You have access to a range of 8 colours for foreground, background and border, together with a sound generator and high-resolution graphics.

You have the facility to support separate data files.

You have a choice of storage capacities (governed by the amount of RAM). 16K of RAM (which you can uprate later to 48K of RAM) or a massive 48K of RAM.

Yet the price of the Spectrum 16K is an amazing £125! Even the popular 48K version costs only £175!

You may decide to begin with the 16K version. If so, you can still return it later for an upgrade. The cost? Around £60.

Ready to use today, easy to expand tomorrow

Your ZX Spectrum comes with a mains adaptor and all the necessary leads to connect to most cassette recorders and TVs (colour or black and white).

Employing Sinclair BASIC (now used in over 500,000 computers worldwide) the ZX Spectrum comes complete with two manuals which together represent a detailed course in BASIC programming. Whether you're a beginner or a competent programmer, you'll find them both of immense help. Depending on your computer experience, you'll quickly be moving into the colourful world of ZX Spectrum professional-level computing.

There's no need to stop there. The ZX Printer – available now – is fully compatible with the ZX Spectrum. And later this year there will be Microdrives for massive amounts of extra on-line storage, plus an RS232 / network interface board.

Key features of the Sinclair ZX Spectrum

- Full colour – 8 colours each for foreground, background and border, plus flashing and brightness-intensity control.
- Sound – BEEP command with variable pitch and duration.
- Massive RAM – 16K or 48K.
- Full-size moving-key keyboard – all keys at normal typewriter pitch, with repeat facility on each key.
- High-resolution – 256 dots horizontally x 192 vertically, each individually addressable for true high-resolution graphics.
- ASCII character set – with upper- and lower-case characters.
- Teletext-compatible – user software can generate 40 characters per line or other settings.
- High speed LOAD & SAVE – 16K in 100 seconds via cassette, with VERIFY & MERGE for programs and separate data files.
- Sinclair 16K extended BASIC – incorporating unique 'one-touch' keyword entry, syntax check, and report codes.

um

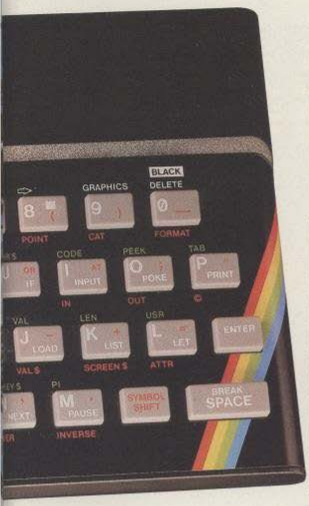

ZX Spectrum software on cassettes – available now

The Spectrum software library is growing every day. Subjects include games, education, and business/household management. Flight Simulation...Chess...Planetoids...History...Inventions...VU-CALC...VU-3D...Club Record Controller...there is something for everyone. And they all make full use of the Spectrum's colour, sound, and graphics capabilities. You'll receive a detailed catalogue with your Spectrum.

ZX Expansion Module

This module incorporates the three functions of Microdrive controller, local area network, and RS232 interface. Connect it to your Spectrum and you can control up to eight Microdrives, communicate with other computers, and drive a wide range of printers.

The potential is enormous, and the module will be available in the early part of 1983 for around £30.

sinclair

Sinclair Research Ltd, Stanhope Road, Camberley, Surrey GU15 3PS.
Tel: Camberley (0276) 685311.

The ZX Printer – available now

Designed exclusively for use with the Sinclair ZX range of computers, the printer offers ZX Spectrum owners the full ASCII character set – including lower-case characters and high-resolution graphics.

A special feature is COPY which prints out exactly what is on the whole TV screen without the need for further instructions. Printing speed is 50 characters per second, with 32 characters per line and 9 lines per vertical inch.

The ZX Printer connects to the rear of your ZX Spectrum. A roll of paper (65ft long and 4in wide) is supplied, along with full instructions. Further supplies of paper are available in packs of five rolls.



The ZX Microdrive – coming soon

The new Microdrives, designed especially for the ZX Spectrum, are set to change the face of personal computing by providing mass on-line storage.

Each Microdrive can hold up to 100K bytes using a single interchangeable storage medium.

The transfer rate is 16K bytes per second, with an average access time of 3.5 seconds. And you'll be able to connect up to 8 Microdrives to your Spectrum via the ZX Expansion Module.

A remarkable breakthrough at a remarkable price. The Microdrives will be available in the early part of 1983 for around £50.

How to order your ZX Spectrum

BY PHONE – Access, Barclaycard or Trustcard holders can call 01-200 0200 for personal attention 24 hours a day, every day. BY FREEPOST – use the no-stamp needed coupon below. You can pay by cheque, postal order, Barclaycard, Access or Trustcard.

EITHER WAY – please allow up to 28 days for delivery. And there's a 14-day money-back option, of course. We want you to be satisfied beyond doubt – and we have no doubt that you will be.

To: Sinclair Research, FREEPOST, Camberley, Surrey, GUI5 3BR. **Order**

Qty	Item	Code	Item Price £	Total £
	Sinclair ZX Spectrum – 16K RAM version	100	125.00	
	Sinclair ZX Spectrum – 48K RAM version	101	175.00	
	Sinclair ZX Printer	27	59.95	
	Printer paper (pack of 5 rolls)	16	11.95	
	Postage and packing: orders under £100	28	2.95	
	orders over £100	29	4.95	
			Total £	

Please tick if you require a VAT receipt ☐

*I enclose a cheque/postal order payable to Sinclair Research Ltd for £ _____

*Please charge to my Access/Barclaycard/Trustcard account no.

*Please delete/complete as applicable

Signature

PLEASE PRINT

Name: Mr/Mrs/Miss

Address

YOC 902

FREEPOST – no stamp needed. **Prices apply to UK only.** **Export prices on application.**

Sinclair ZX Spectrum–technical data.

Dimensions

Width	233 mm
Depth	144 mm
Height	30 mm

CPU/ memory

Z80A microprocessor running at 3.5 MHz.
16K-byte ROM containing BASIC interpreter and operating system.

16K-byte RAM (plus optional 32K-byte RAM on internal expansion board) or 48K-byte RAM.

Keyboard

40-moving-key keyboard with full upper and lower case with capitals lock feature. All BASIC words obtained by single keys, plus 16 graphics characters, 22 colour control codes, and 21 user-definable graphics characters. All keys have auto repeat.

Display

Memory-mapped display of 256 pixels x 192 pixels; plus one attributes byte per character square, defining one of eight foreground colours, one of eight background colours, normal or extra brightness and flashing or steady. Screen border colour also settable to one of eight colours. Will drive a PAL UHF colour TV set, or black and white set (which will give a scale of grey), on channel 36.

Sound

Internal loudspeaker can be operated over more than 10 octaves (actually 130 semitones) via basic BEEP command. Jack sockets at the rear of computer allow connections to external amplifier/ speaker.

Graphics

Point, line, circle and arc drawing commands in high-resolution graphics.
16 pre-defined graphics characters plus 21 user-definable graphics characters. Also functions to yield character at a given position, attribute at a given position (colours, brightness and flash) and whether a given pixel is set. Text may be written on the screen on 24 lines of 32 characters. Text and graphics may be freely mixed.

Colours

Foreground and background colours, brightness and flashing are set by BASIC INK, PAPER, BRIGHT and FLASH commands. OVER may also be set, which performs an exclusive–or operation to overwrite any printing or plotting that is already on the screen. INVERSE will give inverse video printing. These six commands may be set globally to cover all further PRINT, PLOT, DRAW or CIRCLE commands, or locally within these commands to cover only the results of that command. They may also be set locally to cover text printed by an INPUT statement. Colour-control codes, which may be accessed from the keyboard, may be inserted into text or program listing, and when displayed will override the globally set colours until another control code is encountered. Brightness and flashing codes may be inserted into program or text, similarly. Colour-control codes in a program listing have no effect on its execution. Border colour is set by a BORDER command. The eight colours available are black, blue, red, magenta, green, cyan, yellow and white. All eight colours may be present on the screen at once, with some areas flashing and others steady, and any area may be highlighted extra bright.

Screen

The screen is divided into two sections. The top section – normally the first 22 lines – displays the program listing or the results of program or command execution. The bottom section – normally the last 2 lines – shows the command or program line currently being entered, or the program line currently being edited. It also shows the report messages. Full editing facilities of cursor left, cursor right, insert and delete (with auto-repeat facility) are available over this line. The bottom section will expand to accept a current line of up to 22 lines.

Mathematical operations and functions

Arithmetic operations of +, –, ×, ÷, and raise to a power. Mathematical functions of sine, cosine, tangent and their inverses; natural logs and exponentials; sign function, absolute value function, and integer function; square root function, random number generator, and pi.

Numbers are stored as five bytes of floating point binary – giving a range of $+3\times10^{-39}$ to $+7\times10^{38}$ accurate to 9½ decimal digits.

Binary numbers may be entered directly with the BIN function. =, >, <, >=, <= and <> may be used to compare string or arithmetic values or variables to yield 0 (false) or 1 (true). Logical operators AND, OR and NOT yield boolean results but will accept 0 (false) and any number (true).

User-definable functions are defined using DEF FN, and called using FN. They may take up to 26 numeric and 26 string arguments, and may yield string or numeric results.

There is a full DATA mechanism, using the commands READ, DATA and RESTORE.

A real-time clock is obtainable.

String operations and functions

Strings can be concatenated with +. String variables or values may be compared with =, >, <, >=, <=, <> to give boolean results. String functions are VAL, VAL$, STR$ and LEN. CHR$ and CODE convert numbers to characters and vice versa, using the ASCII code.

A very powerful string slicing mechanism exists, using the form a$ (x TO y).

Variable names

Numeric – any string starting with a letter (upper and lower case are not distinguished between, and spaces are ignored).
String – A$ to Z$.
FOR-NEXT loops – A-Z.
Numeric arrays – A-Z.
String arrays – A$ to Z$.

Simple variables and arrays with the same name are allowed and distinguished between.

Arrays

Arrays may be multi-dimensional, with subscripts starting at 1. String arrays, technically character arrays, may have their last subscript omitted, yielding a string.

Expression evaluator

A full expression evaluator is called during program execution whenever an expression, constant or variable is encountered. This allows the use of expressions as arguments to GOTO, GOSUB, etc.

It also operates on commands allowing the ZX Spectrum to operate as a calculator.

Cassette interface

The ZX Spectrum incorporates an advanced cassette interface. A tone leader is recorded before the information to overcome the automatic recording level fluctuations of some tape recorders, and a Schmitt trigger is used to remove noise on playback.

All saved information is started with a header containing information as to its type, title, length and address information. Program, screens, blocks of memory, string and character arrays may all be saved separately.

Programs, blocks of memory and arrays may be verified after saving to confirm successful saving.

Programs and arrays may be merged from tape to combine them with the existing contents of memory. Where two line numbers or variables names coincide, the old one is overwritten.

Programs may be saved with a line number, where execution will start immediately on loading.

The cassette interface runs at 1500 baud, through two 3.5 mm jack plugs.

Expansion port

This has the full data, address and control busses from the Z80A, and is used to interface to the ZX Printer, the RS232 and NET interfaces and the ZX Microdrives.

IN and OUT commands give the I/O port equivalents of PEEK and POKE.

ZX81 compatibility

ZX81 BASIC is essentially a subset of ZX Spectrum BASIC. The differences are as follows.

FAST and SLOW: the ZX Spectrum operates at the speed of the ZX81 in FAST mode with the steady display of SLOW mode, and does not include these commands.

SCROLL: the ZX Spectrum scrolls automatically, asking the operator "scroll?" every time a screen is filled.

UNPLOT: the ZX Spectrum can unplot a pixel using PLOT OVER, and thus achieves unplot.

Character set: the ZX Spectrum uses the ASCII character set, as opposed to the ZX81 non-standard set.

ZX81 programs may be typed into the ZX Spectrum with very little change, but may of course now be considerably improved. The ZX Spectrum is fully compatible with the ZX Printer, which can now print out a full upper and lower case character set, and the high resolution graphics; using LLIST, LPRINT and COPY. ZX81 software cassettes and the ZX 16K RAM pack will not operate with the ZX Spectrum.

sinclair
ZX Spectrum

Sinclair Research Ltd, Stanhope Road, Camberley, Surrey, GU15 3PS. Tel: Camberley (0276) 685311.

OTHER-WORLDLY SOFTWARE SOFTEK AT DOWN TO EARTH PRICES

Imagine a program which instantly converts SPECTRUM BASIC into Machine Code, and transforms the SPECTRUM into a micro up to 100 times faster than a BBC Model B...

48K ZX SPECTRUM COMPILER

£14.95 inc

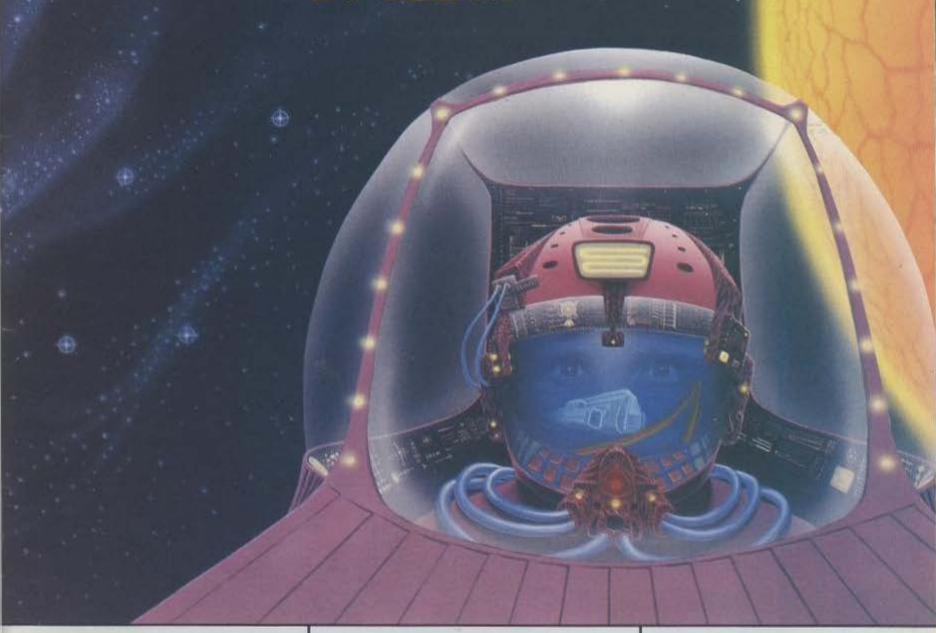

METEOROIDS

This version has been hailed the best: 3 sizes of meteoroids, saucer, wrap-around screen, bonus ship at 10000 points, amazing explosions, rotate left/right, thrust, fire, hyperspace and shield. Full feature 'arcade' sounds and full colour. Works with Joysticks (from us at £19.50). Only £4.95 inc (16K or 48K).

SOFTIME

Amazing piece of machine code programming–produces a continuous real time clock on screen all the time–even when running/writing another program! Has alarm facility. For 16K or 48K, only £3.95.

SOFTEK SPECTRUM SOFTWARE

COMPILER
Benchmarks

	BBC	SPECTRUM (BASIC)	SPECTRUM (COMPILER)
BM1	1.0s	4.8	0.15
BM2	3.1	8.7	0.09
BM3	8.2	21.1	1.10
BM4	8.7	20.4	0.99
BM5	9.1	24.0	1.11
BM6	13.9	55.3	1.91
BM7	21.4	80.7	2.14

What the SUPER C compiler does is almost magical. It turns a program written in Spectrum BASIC into a machine code equivalent. SUPER C is child's play to use–simply type in a program as usual (or load from tape) and in a few key presses SUPER C turns it instantly into a super fast machine code version. It will compile virtually any Spectrum BASIC statement, plus a few features not available to you usually, but extra thought will be required for strings and floating point. There is no program you can write in BASIC which cannot be turned into a SUPER C version. However, enhancement packages will be available in the New Year to aid string handling, floating point, and will offer a host of other features–each for a nominal cost. With SUPER C your Spectrum will run faster than with either FORTH or PASCAL–and no new language to learn! SUPER C comes complete with extensive documentation, a manual written by Tim Langdell, example programs, and all boxed in a professional library case. Less than half the price of a compiler for any comparable micro.–£14.95 inc.

48K 3D MAZENTURE

A maze program and adventure in one. Amazing 'monster chase' animation and more than a hint of dungeons and dragons. 48K only. £5.95.

THE ZOLAN ADVENTURE

A full adventure cramined into 16K! Quite astounding how extensive and engaging this program is. £4.95.

Please rush me .....

.....

Mr/Mrs .....

Address .....

.....

or for INSTANT CREDIT CARD order 7 days a week phone: 01-930 9232.

Send cheques or POs to: 329 Croxted Road, London SE24. Tel: 01-674 4572

SOFTEK, SPECTRUM SOFTWARE

At £299* it's very little. At 64K it's very large.

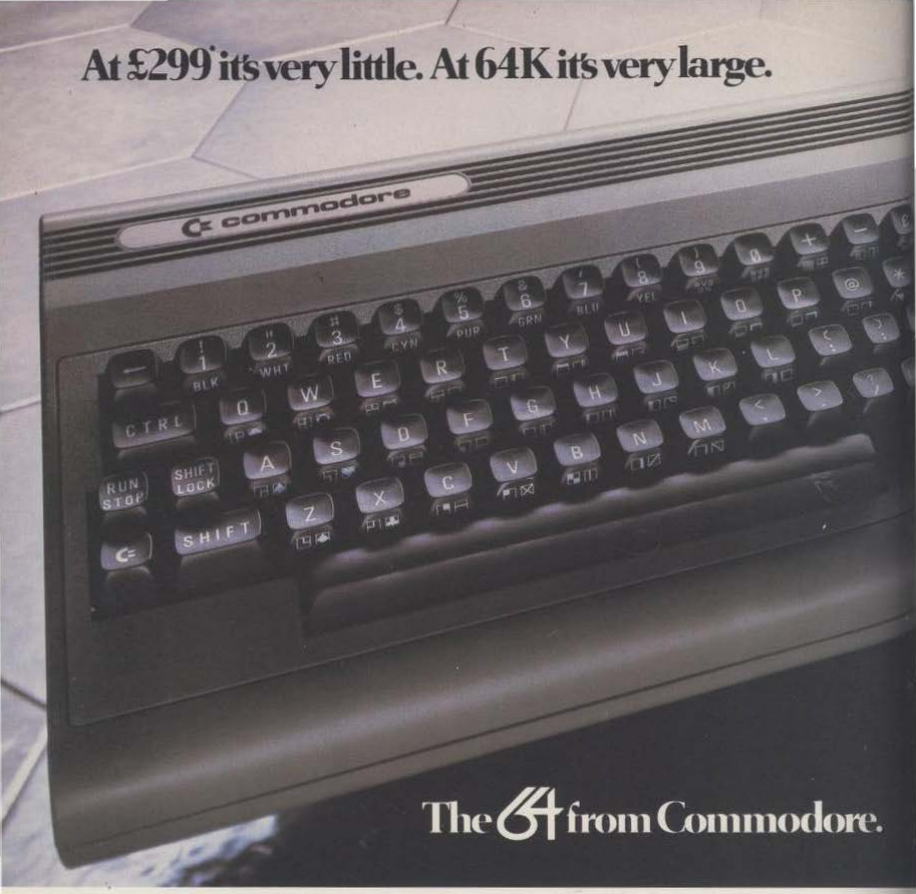

This is the new Commodore 64 Personal Computer.

It costs £299. Not bad for a brilliant piece of technology with a 64K memory.

But then, it's a Commodore.

And as one of the world's leading high-performance micro-computer companies, we're not exactly unknown when it comes to outstanding achievements.

The Commodore 64's nearest rival – if that's the word – costs over half as much again.

Here is the specification, a comparison with the Apple II, and a coupon.

The rest is up to you.

---

1. A total memory capacity of 64K; 38K directly available to BASIC. When not using BASIC a full 54K is available for machine code programs.

2. Interface adaptors will allow the use of a complete range of hardware peripherals including disk units, plotter, dot matrix and daisy wheel printers, Prestel communications, networking and much, much more.

3. A complete range of business software including word processing, information handling, financial modelling, accounting and many more specific application packages will be available.

4. Other computer languages such as LOGO, UCSD PASCAL, COMAL and ASSEMBLER are being developed. Existing VIC and 40 column PET BASIC programs can be easily converted.

5. The powerful sound chip gives 3 totally independent voices each with a range of 9 octaves. User control over music envelope, pitch and pulse shapes provides the ability to make your Commodore 64 sound like a variety of musical instruments, solo or in harmony.

6. 62 predefined graphic characters plus

full alpha numerics with upper and lower case letters, all available directly from the keyboard and displayable in normal or reverse video in any of 16 colours.

7. 40 column by 25 lines colour display. In high resolution graphics mode, a bit mapped screen gives 320 x 200 individually addressable pixels.

8. The dedicated video chip allows the use of high resolution multi-coloured "Sprites" (moveable object blocks). Sprites can be moved pixel by pixel, independently of anything else on the screen.

9. Sprites can also be set up in 8 "layers" giving full 3 dimensional effects with, if required, automatic collision detection between sprites and any other screen object.

10. Machine bus port will accept ROM cartridges for many applications, including business, educational, home and leisure software.

11. A second processor option using the Z80 gives the Commodore 64 the ability to support CP/M.®

HOW COMMODORE PIPS APPLE.

FEATURES	COMMODORE	APPLE II+
Base Price	£299*	£499*
ADVANCED FEATURES		
Built-in user memory	64K	48K
Programmable	YES	YES
Real typewriter keyboard	YES (66 keys)	YES (52 keys)
Graphics characters (from keyboard)	YES	NO
Upper & lower case letters	YES	NO**
Function keys	YES	NO
Maximum 5¼" floppy disk capacity per drive	170 K.B. to 1 M.B.	143 K.B.
AUDIO FEATURES		
Sound Generator	YES	YES
Music Synthesizer	YES	NO
Hi-Fi Output	YES	NO
VIDEO OUTPUT		
Monitor Output	YES	YES
T.V. Output	YES	EXTRA
INPUT/OUTPUT FEATURES		
Cassette Port	YES	YES
Intelligent Peripherals	YES	YES
Serial Peripheral Bus	YES	NO
ADDITIONAL SOFTWARE FEATURES		
CP/M® Option (over 1000 packages)	YES	YES
External ROM cartridge slot	YES	NO

*EXC. VAT – DETAILS CORRECT AT TIME OF GOING TO PRESS
**UPPER ONLY
CP/M® IS A REGISTERED TRADEMARK OF DIGITAL RESEARCH, INC.

commodore

For more information on the powerful new Commodore 64, and the address of your nearest Commodore dealer, telephone or write to us at:
The Commodore Information Centre,
675 Ajax Avenue, Slough, Berkshire SL1 4BG.
Telephone: Slough (0753) 79292.

NAME (MR/MRS/MISS)

POSITION

COMPANY

ADDRESS

POSTCODE TEL

65YOC 0283

Spectrum Software

Meteroids • 3D Tanx • Centipede

AVAILABLE NOW! £4.95 Each

Features: Fast machine code, full colour, fantastic sound effects and define your own play keys

Send off the coupon today or telephone Gt. Yarmouth (0493) 602453 (24 hrs a day, 7 days a week) giving your Barclaycard or Access number.

dk'tronics

23 Sussex Road,
Gorleston,
Gt. Yarmouth,
Norfolk.
Tel: (0493) 602453

Access

BARCLAYCARD

VISA

Name.....

Address.....

.....

Please send me.....Meteroids.....3D Tanx

.....Centipede @ £4.95 each inc. P&P

I enclose cheque/PO payable to DK Tronics Total £

or debit my Access/Barclaycard,

Signature.....

ENTER THE DRAGON

TEACH YOUR DRAGON TO ROAR!

A fresh and highly creative collection of ready made programs designed specifically for the **Dragon 32** micro. Created by the sharpest minds in micro software today, this book will teach you how to maximise the entire range of your Dragon's impressive capabilities. Using easy-to-follow programmed listings, this book turns your Dragon 32 into a complete arcade of fast action space and adventure games. All your favourites are there including: **Dragon Invaders, Lunar Lander** and **Astral Storm,** plus there's an entire collection of fresh and exciting new games!

Each program fully extends the excellent colour resolution of the Dragon to its maximum and the action is faster than you ever thought possible.

Your overall knowledge of computer operation will be expanded too. Each program features an in-depth explanation of how and why it runs and illustrations of screen displays back up the text to ensure you understand exactly what will be achieved.

The book even includes many programming tips and hints usually reserved only for the experts. So whether you are a first-time computer user or an 'old hand' if you want to make your Dragon really perform, and feel the satisfaction of doing it yourself, this is the book that will show you how!

MELBOURNE HOUSE PUBLISHERS Orders to: 131 Trafalgar Road, Greenwich, London SE10

Correspondence to: Glebe Cottage, Station Road, Cheddington, Leighton Buzzard, BEDS LU7 7NA **Trade enquiries welcome.**

☐ Please send me your **free** catalogue.

Please send me:

Books

SPECTRUM
- ☐ Understanding Your Spectrum £7.95
- ☐ Spectrum Machine Language For The Absolute Beginner £6.95
- ☐ Over The Spectrum £6.95

VIC 20
- ☐ VIC Innovative Computing £6.95

DRAGON
- ☐ Enter The Dragon £5.95

ZX81
- ☐ Machine Language Made Simple for the ZX80 & ZX81 £8.95
- ☐ Not Only 30 Programs £4.95
- ☐ Understanding Your ZX81 ROM £8.95
- ☐ Complete Sinclair Basic Course £17.50
- ☐ Basic Course cassettes £2.50
- ☐ Complete Sinclair Rom Disassembly Part A & B £9.95

Cassettes

16K SPECTRUM
- ☐ Over The Spectrum No. 1 £5.95
- ☐ Over The Spectrum No. 2 £5.95
- ☐ Over The Spectrum No. 3 £5.95
- ☐ Programs from Spectrum Machine Language Book £5.95

48K SPECTRUM
- ☐ Penetrator £6.95
- ☐ The Hobbit £14.95

STANDARD VIC 20
- ☐ VIC Innovative Cassette 1 £5.95
- ☐ VIC Innovative Cassette 2 £5.95
- ☐ VIC Innovative Cassette 3 £5.95
- ☐ VIC Games Pack £5.95
- ☐ The Wizard & The Princess £5.95

All prices include VAT where applicable

£ _____

All Melbourne House cassette software is unconditionally guaranteed against malfunction.
Access orders can be telephoned through on our 24-hour ansafone (01) 858 7397.
I enclose my cheque/money order for £ _____

Please add 80p for post and pack £ .80

TOTAL £ _____

Please debit my Access card No. _____ Expiry date _____

Signature _____ Name _____

Address _____

_____ Postcode _____ YC2

MELBOURNE HOUSE PUBLISHERS

SOFTWARE FOR ALL

SOFTWARE FOR ALL presents programs for the people! Our list of original programs for the BBC, DRAGON, and SPECTRUM is growing every day! Reasonably priced. Ingenious use of programming. Excellent entertainment. These are the hallmarks of SOFTWARE FOR ALL.

Order now for fast delivery or visit one of our dealers. There's big things happening for all computer users . . . That's why we're called SOFTWARE FOR ALL!

PAIRS

A computerised version of the original card game with Hi-Res graphics.

£6.45 DRAGON 32

GALACTIC INTRUDER

BBC MICRO

Fast arcade-type action game with Hi-Res colour and sound. Machine Code. 32K **£6.95**

J.R.

Two player game, features include exploration, drilling, employment and Price Wars. 32K

BBC MICRO **£6.95**

AREA RADAR CONTROLLER

You're in the control tower at Heathrow and it's your job to control up to 79 aircraft, taking off, landing, or just passing through. VERY ADDICTIVE — HIGHLY FRUSTRATING!

DRAGON 32 **£7.95**

POLAR BEAR

Educational game for 8-12-year-olds incorp. simple maths tables.

32K BBC MICRO **£7.45**

ROW OF FOUR

Try to outwit your computer opponent in this game of skill. Great graphics. BASIC and machine code. 32K

BBC MICRO **£6.45**

PHARAOH'S TOMB

ZX SPECTRUM

3D Maze Game and Adventure rolled into one! 48K

£6.95

SPACE KINGDOM

Battle your way around the Planets to become ruler of the Galaxy! Excellent use of graphics and sound. 32K

£7.95 BBC MICRO

TIME TRAVELLER

Travel through over 100 rooms in different times, and find the key back to your own time. 32K

BBC MICRO **£6.95**

Utility Pack I

£7.45

Envelope program, variable print-text scanner and memory dump. 32K

BBC MICRO

CAR WARS/ALIEN PLANET

Two addictive graphics games both BASIC and Machine Code.

32K **£6.95** BBC MICRO

DANGER ISLAND

An adventure game in which you fight your way through many obstacles to escape.

DRAGON 32 **£6.95**

Utility Pack 2

£7.45

Disassembler, program crunch and text editor: 32K

BBC MICRO

ZOMBIE ISLAND

Fight for survival on an island inhabited by hungry, dangerous cannibals. BASIC and machine code program.

32K BBC MICRO **£7.95**

BEEBTREK

BBC MICRO

Real time advanced Star trek Game. Extra facilities include probe satellites, damage reports & on-board computer.

16/32K **£7.95**

SEND TODAY! Post to SOFTWARE FOR ALL, Dept YC, 72 North Street, Romford, Essex or Phone: (0708) 60725.

Name: .....

Address: .....

Please send me:

£ .....

£ .....

£ .....

£ .....

£ .....

£ .....

Please add £1.00 P&P per order . . £ 1.00

Total: .....

I enclose Cheque/P.O. made payable to SOFTWARE FOR ALL.

Please bill my Access/Barclaycard/Amex No: .....

SOFTWARE FOR ALL

"Programs for the people"

YOUR LETTERS

DRAGON SAVE

Having had many initial problems with program crashing on my Dragon 32 and Ferguson tape, I would like to pass on this tip to your readers.

It is no use relying on the five-pin DIN-plug to jack-plug lead supplied by Dragon for use with the machine to Save and Load programs. To obtain reliable saving and loading, a five-pin DIN to five-pin DIN lead is required, this being coupled from the DIN socket on the Dragon to the DIN socket on the Feguson cassette. The tone setting on the Ferguson should be set to maximum, the volume setting to half-way.

Using the method has only one drawback, as it loses the Dragon's remote control feature.

It is therefore important that to save a program users have the cassette running before the CSave command is entered and conversely the C.Load command entered and [S] commenced before the Play button is pressed.

The principle behind the use of the DIN lead is that it gives a better impedance match, and therefore a better yield.

N J Peake,
Berryhill,
Stoke on Trent.

BREAKER

With reference to Gino Cracins' program in Software File — see December 1982 — which will break any ZX-81 program upon loading, there is a much simpler way to achieve this, because the routine is already in the ROM. Just type:

```
FAST (N/L)
RAND USR 836(N/L)
```

The waiting-to-load pattern will appear on the screen. Start the tape recorder. When the program has finished loading, an error message of C/O will appear. Ignore this, then treat the program as a normal one: type List.

T J Rogers,
Newbury,
Berkshire.

VIC COLOUR

I own a Vic-20 and personally think that it is a great machine but one of its minor failings is its colour display, which tends to be rather dull. However, this can be rectified in a few moments after a minor adjustment.

Remove the three screws holding the top half of the machine — the keyboard — and gently take it out. Test it face down, on the keys. Facing you, nearest the video-audio DIN socket there are two light-blue plastic screws with Phillips-type heads. Plug in the Vic and switch on TV as normal.

The right-most plastic screw, the one nearest the video-audio DIN socket should be turned very slowly clockwise.

You will immediately notice a great improvement in clarity and brilliance. Colour can also be adjusted using the TV's own colour controls in conjunction with the turning screw to reach the desired effect.

Replace unit keyboard carefully. Although removing the unit is not something that Commodore would approve of, if done properly it only takes a few minutes.

Des Taylor,
Beckenham,
Kent.

LONG MEMORY

A point that all owners, and prospective owners, of Dragons should note is that they have over 29K of user memory available if they ask the beast to give it to them. The default values leave only about 26K on offer but if, after power-up, you type in PClear 1 and then request ?Mem you will be told 29127, which is nice to know.

A colleague of mine has a Dragon that was hatched slightly earlier than mine, and he reports that he needs to type in PMode 0,0 to get the machine to accept the command to free those extra graphics pages for other use. Even though his machine is in that mode by default, it needs to be told it is! Perhaps some changes have been made to the ROM. If you have gone through PClear 1 you need to remember to go through PMode and PClear statements of the correct value before running specifically graphics-orientated programs; otherwise you will get FC errors thrown at you.

I have not yet found a use for those 29K+, as I am still at the novice stage of Dragon taming. However I am sure it could be valuable in terms of data and file handling and it surprises me that no reference is made to the possibilities in the manual, nor has it been mentioned by other commentators as far as I am aware.

It points up the need for somebody to produce some decent documentation on the machine as I believe that at present a great deal of its potential is unrealised. The books on the 6809 originating in the USA are both overdetailed for my purposes and too darned expensive!

I should also point out to potential computer purchasers, with the sort of brain-ache that I developed before making my decision, that the routine above makes many of the comparisons between machines entirely specious; after all Commodore will charge you a sum of about £30 for an extra 3K of user RAM.

Stephen Mummery,
Bury St. Edmunds,
Suffolk.

SAINT JUDE

I have been one of the many ZX-81 owners for over a year now. Until last week I was also one of the many ZX owners who had never managed to load a commercial software tape successfully. I had tried two different tape recorders, one normal and one computer-compatible, mains supply and battery, and even a prayer to Saint Jude — I hear lost causes are her speciality.

I was on the point of converting my ZX-81 into a short-range ballistic missile, when a freak accident changed my fortune. I left the machine plugged in overnight and my two-year old child engaged the Fast Forward button on the tape recorder while I was at work.

In a frenzy of panic I hurled the nearest tape into the machine and loaded. The signal on the screen still appeared normal but to my horror came up with the report O/O. And lo!, there it was: *Your Computer's* flexidisc program. Since then every program that I have offered has loaded without so much as an adjustment. Could this have had anything to do with the slowing down of the tape deck and therefore the computer finding it easier to accept the signal? Meanwhile to all those ZX-81 owners out there. Do not despair with your machine, just give it some stick!

I Harrison,
Slough,
Berkshire.

DISPLAY FILE

Two errors were printed in the December issue in Your Letters. Patrick Couser claims to have found location of the display file in a 16K ZX-81. First error: his letter states an address of 49340. You can not use addresses greater than 32768. If the address is higher than this, the ZX-81 effectively subtracts 32768; that is Peek 32769 equals Peek 1, Peek 32770 equals Peek 2. His value of 49340 is the same as 16572. Second error: the screen starting and finishing addresses can only be at the locations quoted if a short program is sitting in the ZX-81. The screen area always starts directly after your program area. Use a longer program and the screen area would be higher up in the memory. This is not a problem: the Sinclair manual quotes the system variables 16396 and 16397 as the pointers to the Display File Start — the screen area. In any program if you include a line thus:

```
LET Z = PEEK 16396 + 256*PEEK
      16397 + 1
```

then Z will hold the start address of the screen area. Note: the +1 is added at the end, since the first character in the display file is a character 118 — Newline character — and must not be altered. Try these examples to prove the point: Enter the previously-mentioned Let Z etc, as a direct command into an empty ZX-81. Then enter the following direct commands:

```
POKE Z,23
```

This will Poke a * in top left hand corner of the screen.

```
POKE Z + 31,23
```

will put an * in the top right-hand corner of the screen. Caution: the end of each line in display file is a 118 Newline character which must not be altered. You must allow for this if Poking the screen area.

```
POKE Z + 32,23
```

will most definitely casue the ZX-81 to crash. Try POKE Z+34,23 and you will Poke a * on to left-hand position of second line. Just in case you haven't realised, you simply add 33 to Z to go to a lower line. For example, to Poke a * to centre of the screen add 330 to get to centre line, and add 16 to get to centre column. Try:

```
POKE Z + 346,23
```

In Software File, the List Self Starter claims to be a method of stopping games which self-start and cannot normally be listed. It stated that Poke 16389,127 followed by New Newline before Loading would do this. 16389 is the pointer to RAMtop. It claimed this method enabled ZX Chess to be stopped. Whilst it possibly stops this game, it most definitely will not stop all games. This method simply reduces RAMtop such that there is insufficient memory for the game to Run. To stop games say of only 5K, you'd need to spend several weeks trying to decide the appropriate value to reduce RAMtop down to such that the game can Load but not Run.

G A Bobker,
Bury,
Lancashire

A CAUTION

May I add further point to the Sinclair saga. Like Mr Keevy — December 1982 — I got weary, hearing the same, regular extension of delivery forecast and finally cancelled my order at the end of August, by phone and following letter.

I heard no more of the matter until I received my November Access statement. This contained a debit in favour of Sinclair Research, dated October 19th. No Spectrum has been delivered, there has been no word from Sinclair and I have never signed any authorisation for Access payment, since the original order was by phone.

The answer would appear to be: warn the credit card company as well as cancelling with Sinclair, though in my case I have ended up closing my Access account and am currently trying to get them and Sinclair to sort out the balance.

R K Davis,
Silverdale,
Lancashire. ■

It came from outer Handsworth — the £150 BBC robot buggy crawls into the classroom

ANOTHER FRUIT of the Computer Literacy Project is the BBC Buggy developed for the BBC by the Microelectronics Education Programme. The Buggy is a three-wheeled precision vehicle which operates from a BBC model B microcomputer. Described as a "programmable robotic device" the vehicle is driven by two stepper motors. It contains sensors which can detect light, and collisions, and there is also an infra-red transceiver underneath capable of reading bar-codes or following a line.

The device has been produced primarily for education. A series of graded programs is supplied with the package designed to demonstrate the nature of programmable control using the vehicle in an imaginative manner. Future developments will include a pen-up, pen-down mechanism.

The Buggy will be sold as a contruction kit complete with software, circuit boards, stepper motors and control cables. A screwdriver is the only tool required to assemble it. The price will be around £150 and it will be available in March from Economatics, 40 Orgreave Crescent, Dore house Industrial Estate, handsworth, Sheffield S31 9NQ.

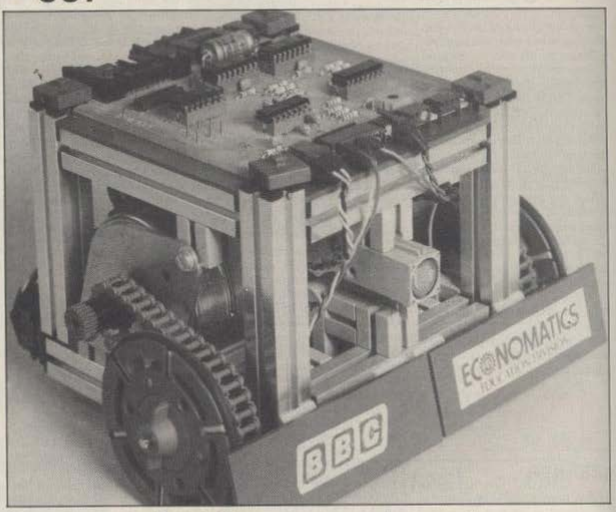

YOUR COMPUTER TOP 20

Game	Company	Machine
☐3D Defender	J K Greye	ZX-81
☐Star Trek	Macronics	ZX-81
☐Gulpman	Campbell Systems	Spectrum
☐Black Crystal	Carnell Software	ZX-81
☐Amok	Audio-genic	Vic-20
☐Time Gate	Quicksilva	Spectrum
☐Trader	Pixel	ZX-81
☐Mazogs	Bug-Byte	ZX-81
☐Winged Avenger	Work Force	Spectrum
☐Hopper	Rabbit Software	Vic-29
☐Chess	Bug-Byte	BBC
☐Starwars	Audio-genic	Vic-20
☐Star Raiders	Atari	Atari
☐Pac-Man	Atari	Atari
☐Scramble	Quicksilva	ZX-81
☐Star Trek	Salaman-der	Dragon
☐Escape	New Generation	Spectrum
☐Submarine Com-mander	EMI	Atari
Space Walk	Bug-Byte	BBC
☐Pimania	Automata	ZX-81
☐Ghost Attack	Dragoh	Dragon

Barton sleuths use micro to deflate £2 million fraud claims

WHEN POLICE SWOOPED on Oxford's "scroungers" last year and smashed what they claimed was a multi-million pound fraud, they could hardly have expected that a micro-computer would come to the aid of the claimants.

While banner headlines told how Operation Major had smashed a £2 million social security fraud the Claimants Defence Committee claimed that the facts were rather different and asked a local community centre, the Barton Project, to use their computer to keep track of the cases as they appeared in court. The Barton Project went further and developed a 40K welfare rights program in Basic. This can tell claimants what they should be receiving and is designed to be used by any community centre which could afford a home computer like the Lynx or Commodore 64.

The analysis of the cases showed the total fraud to be less than £63,000 rather than over £2 million and according to Mike Noble of the Barton Project some who were convicted were owed more by the DHSS than they were alleged to have fraudulently claimed.

Mike Noble wrote the welfare rights program in Reasearch Machines Basic but has deliberately designed it to make it easily translatable for any home computers with 40K of spare memory. Mike Noble points out that "The complexity is in the rules themselves and reducing them to If . . . Then statements, not in the program itself. The average games program in the back of *Your Computer* has more complicated Basic."

Anyone using high resolution graphics on the BBC model B is limited to a maximum of 8K RAM to program in. Modes 0, 1, and 2 take up 20K of the available 32K and the operating system consumes a further 3.5K which it needs for work space. Acorn's answer to this memory shortage in the Tube; a 1MHz data bus which permits the model B to be connected to a second processor. From the end of March two eight-bit processors, a 6502 and a Z-80, will be on sale for £195 each. Both supply a further 64K RAM of which 48K will be available to the user. At a later date Acorn is going to release a 16-bit processor with the capacity to address a massive 16 Mbytes of RAM. Adding a second processor should result in significant improvements in processing speed. Since the second processor will take over the task of interpreting and running programs it will leave the first processor free to handle all input/output operations such as writing to the screen or scanning the keyboard.

Commodore compiler

PETSPEED IS THE FIRST optimising compiler to be released for any microcomputer. Several compilers are now available for the BBC Micro, the Spectrum and even the ZX-81. These just concentrate on converting a Basic program into executable machine code and can only cope with about 80 percent of the available Basic commands. An optimising compiler goes a step further in trying to compile code efficiently and compactly.

Petspeed runs on the Commodore-64 and the Pet, and makes programs run up to 40 times faster. Typical compilation times average two minutes, one second per line of Basic code, and most programs can be completed in about five minutes.

This is a far more substantial package than the other compilers for home computers, although at £125 it costs correspondingly more. It comes with a security device — a dongle — which plugs into the back of the computer and protects Petspeed from unauthorised tampering. In addition the compiler makes a few improvements to Pet Basic: it allows long variable names to be used and extends the Def FN command to handle strings.

Petspeed is available direct from Oxford Computer Systems, Woodstock, Oxford or from Commodore dealers.

Texas extends range with £90 16-bit black and white micro

TEXAS INSTRUMENTS will launch the TI-99/2 in Britain later this year. Texas unveiled the new machine at the Las Vegas show in January. Specification includes 5K RAM, 16-bit processor — the new TI 99/95 chip designed in the UK — and a moving-key keyboard, all for £90. The machine will have plug-in ROM packs with additional programming languages like Pascal and Logo.

Texas is backing "computer-literacy" machines which primarily teach you about computing rather than the family micro. It is the cheaper end of the market that Texas find interesting.

A family of hand-held Basic computers is also scheduled for release this year. However, the TI-99/4 is not to be phased out. The machine has been very much the poor relation in the home computer market, suffering from the effects of its initial test-marketing at a price of £650. Since November when a £50 money-back voucher effectively brought the price down to £150 sales have quintupled and Texas is now out of stock both in Britain and America.

There are now six production lines operating solely on TI-99/4 production in the States — executives have been turfed out of their suites in Lubbock to create floorspace — plus the Italian facility at Rietta which assembles the machines for the European market.

A further plank in the market platform will be the addition of programming languages like Fortran and Pilot for the TI-99/4. With the new Peripheral Expansion System the computer's memory can be enlarged, diskettes can be run and printers connected. The motherboard, has eight slots for peripheral board-type cards, one of which is used to link the system to the computer console. Additional peripheral cards are plugged in to add the desired functions. There is room to install one TI disc drive in the box, and two additional disc drives can be added externally.

Texas is more interested in semiconductor design than in electromechanical devices like disc drives. Research is primarily into chips. The TI-99/9 which will appear in the TI-99/2 computer has control logic built into the chip and 256 bytes of onboard RAM — not a microprocessor but a microcontroller, says the company. It has strong possibilities for robotic/real-time applications.

Sands of Timex may run out soon for British Sinclair production

SINCLAIR IS PREPARED to stop producing computers in Britain if the Timex dispute cannot be resolved. At Timex in Dundee, where the Spectrum and ZX-81 computers are made, the management is threatening to sack 1,900 of the workforce. If the threat is carried out and the workers go on strike Sinclair Research "will move our business elsewhere, probably permanently."

Sinclair Research claims that this will not hit production of the ZX-81 and Spectrum. "We have large stocks, we could do it overnight — there would be no effect on customers." British production of the ZX-83 which Sinclair Research boffin Nigel Searle describes as "a radically different computer" could be endangered — although the machine is not due to go on sale till the Autumn.

600 work on the computer lines at Dundee and these too would lose their jobs if Sinclair follows the example of Timex's other high technology product — the Nimslo 3D camera — which stopped production at Dundee just before Christmas to move to Japan.

Sinclair's computers already include chips made everywhere from El Salvador to Portugal and the company is now prepared to move production of the finished computers overseas if it is not happy with the alternatives in Britain.

THE GUARDIAN

Next month a cut-price entry to the phone-line version will be offered by the Prestel service of British Telecom. This will have a library of 1,000 programs at the start, covering the usual range of education, video games, household management and the like, all fed directly into the home computer.

The BBC service will be gin with around 500 programs, many of them for schools and supplied by the Government's Microelectronics Education Programme.

Drunk with success?

Currah Computer Components have produced a speech synthesiser for the Vic-20. They have given it the same name, Chatterbox, as a similar device for the Spectrum, described in last month's news pages. Like its namesake it allows the user to construct an infinite vocabulary of spoken words out of a number of sound units. As an extra the Vic Chatterbox incorporates a series of software routines in EPROM to facilitate programming of the device. These include an interrupt driven routine which voices the keys as they are pressed, and software for inputting speech phonetically. The speech synthesiser will be distributed through the Spectrum dealer chain or is available directly from Currah Computer Components, Greythorpe Industrial Estate, Hartlepool. Recommended retail price is expected to be around £60.

ATTENTION ALL DRAGON OWNERS!

FED YOUR DRAGON LATELY?

THEN TEMPT HIS TASTEBUDS WITH THE MEATIER MORSELS FROM **Active Software!**
OUR POLICY IS **100%** CUSTOMER SATISFACTION — **TRY US!**

8 CHALLENGING GAMES ON ONE CASSETTE — EACH GAME INCORPORATING THE SPECTACULAR FEATURES OF THE **DRAGON 32**:—
•BRILLIANT COLOUR• •IMPRESSIVE HI-RES GRAPHICS• •EXCITING SOUND EFFECTS•

1) Interplanetary Trader — 20k+!
The year 2283. Occupation:- Space Trader. Tour the Solar System in this real time game. Very challenging and feature packed.

2) Execution — 20k+!
A hangman style game with a difference. Play the computer or an opponent. Lots of extra features. Good graphics and sound.

3) Wumpus Mansion — 20k+!
Incredible Fun!! Outwit the Wumpus (if you can....) and raid the treasures of the Mansion. But don't trigger the — TIME BOMB! —

4) Wipeout
Compulsive, exciting, challenging game of fast reaction. Begins easy but gets progressively harder. With sound and graphics.

5) Hi-Lo — 20k+!
Is it skill or is it luck?? Turn £50 into £1,000,000 with this simple, yet highly entertaining game. Super sound. Brilliant colour, and graphics.

6) Snail Pace
Announcing: -SNAIL DERBY-! Super entertainment! Computer calculated odds and form. 2 - 8 snails per race. Beat the bookie! Full Graphics.

7) Atom Hunt
Full colour, sound, and graphics add to the excitement of this addictive game of deduction. Features:- 1 to 4 players: individual scores and ratings.

8) Air Assault
Blast the skyscrapers with ultra-high explosive bombs and clear a space to land your crippled aircraft before crashing. Hi-res graphics and sound.

48 Hour Dispatch

* All 8 programs supplied for the realistic price of just:—
* All 8 programs double recorded on our own quality tape.
* No-quibble replacement guarantee. * 48 hour dispatch.

£5·75 + 25p P & P

Send Chq/P.O. to: Active Software, Temple House, 43-48 New St., Birmingham B2 4LH.

THE SPECTRUM POCKET BOOK

160pp **£6.50**

Trevor Toms, best selling author of the ZX81 Pocket Book and the Sinclair Learning Lab, turns his attention to the book to the ZX Spectrum — the book you have been waiting for! All the material in the book is totally new.

Programs

- Castle walls; boiling oil and lovely slurping noises
- Great Fire of London; try and change the course of history
- Chase; outwit the pursuing robots and lead them to their doom
- Truly amazing; generate a new maze puzzle every go
- Reversi; the classic oriental strategy game with board screen display
- 3D Maze; race against time and three dimensions to escape.

Hints & Tips

Discover new ways of using PRINT; INSTR functions, VAL, PRINT USING, hexadecimal conversion, upper case conversion, load and save arrays. BEEP with sliding tones, automatic scroll and how to use all the machine features within machine code.

Machine Code

All the tools you need to write machine code effectively. Graphics tool kit — debug monitor — symbol assembler (with labels, all ED commands, ORG statements, forward and relative jumps) — disassembler (with label assignment); now you can really dig into the Sinclair ROM! This section alone would be stupendous value for money!

Also Available
ZX81 Pocket Book 138pp £5.95
ZX80 Pocket Book 128pp £4.95
Atom Business 110pp £7.50

Cassettes for ZX81
Spectrum games as opposite £5.00
Spectrum machine code as above £5.00
Nowotnik Puzzle, Demolition & Tenpin £5.00
3 Adventures: Greedy Gulch, Magic Mountain, Pharaohs Tomb £5.00
ZX81 Pocket Book Cassette £5.00

Prices include VAT

PHIPPS ASSOCIATES

Dept A FREEPOST EM463 (No stamp required)
99, East St, Epsom, Surrey KT17 1BR.
Telephone 03727-21215. 24hr phone service.

Prices include postage but for air mail delivery in Europe add 90p (outside Europe add £2.20) per item.

Access and Barclaycard accepted

Computer Club is here to encourage you to start your own local computer club or, if one already exists, to join it and become involved. We would like to hear of anything which has made your club a success, or of any projects or programs you are developing.

Computerniks in Worcester Park

Networking is but one of the ALCC's interests. Simon Beesley checks out his Worcester sources.

THE ASSOCIATION of London Computer Clubs — ALCC — binds together most of the clubs in the London area in a very effective organisation. Its functions are many and varied. It has established electronic communication between clubs, organises the annual London Computer Fair, co-ordinates club activities and generally tries to promote hobby and recreational computing.

Looking at the map of London early last year the officers of the ALCC saw that there was a large tract of South London running from Croydon to Woolwich which was not furnished with a computer club. Let there be a club in Worcester Park, they cried, and to this end they organised a computer fair at the Worcester Park Library. By the end of the fair more than 100 members had signed up for the new club which now meets regularly once a month at the Worcester Park Library.

The evening *Your Computer* visited the club, Prestel adaptors for the BBC Micro and the Sirius were on display for the first time. Adapting these micros to link up with Prestel is largely a software problem. Harry Broomhall, who has written the software package for the Sirius, demonstrated it using a Tantel adaptor. Bob Forster from the Richmond CC used an acoustic Modem with the BBC package.

This was an interesting introduction to the variety of services the Prestel network offers. Aladdin's Cave on Prestel contains a number of pages of software which can be downloaded into some of the popular home micros. After a few false starts Bob Forster managed to download and run on the BBC a useful little program which explained the basics of digital electronics — an impressive demonstration.

The ALCC itself provides about 300 pages of information on Prestel. These include a newsletter, a magazine section, snippets of information on particular micros and pages devoted to the activities of each member club.

We looked up the Worcester Park pages and there we were — a Prestel demonstration booked for that very evening. Meanwhile, on the Sirius, Len Stuart, the secretary of the ALCC, showed how to edit a page while he updated some of the information on the ALCC's forthcoming Sutton Computer Fair.

Also available to ALCC members is the mailbox facility which enables them to leave and pick up messages for each other. Harry Broomhall logged on and received a pre-formatted frame from David Annals of the Croydon CC. Next to a picture of a reef knot read the message "Get knotted".

Finally, Harry Broomhall gave us a glimpse of Dynamic Prestel, British Telecom's latest development. By accessing BT Research's demonstration pages we were able to have a look at some moving graphics illustrating the Adventures of Prestel Man.

Normally the Worcester Park club's meetings have a fairly informal format. Many members bring their own computers along, which are predominantly Spectrums and BBC Microcomputers. The BBC Micro seems to be the computer enthusiast's choice and is usually well represented at computer clubs.

Meetings are held on the first Monday of every month. For more information contact Norman Beattie on 01-337 3747. ■

Local society news

Bognor Regis Bugs

BOGNOR REGIS now boasts two computer clubs, RAMS and BUGS. RAMS, the Regis Amateur Microcomputer Society, meets on the second Tuesday of each month at the Regis Centre and tends to be a little more formal in its approach. BUGS, the Bognor Users Group, meets on the last Thursday at the RAF Association Club, Waterloo Square. Contact R H Wallis on Pagham 66795 for details on RAMS, and the Bognor Microcentre on Bognor 828108 about BUGS.

South Northamptonshire

SOUTH NORTHANTS Microcomputer Users, Group have changed their meeting place to the Anchor House, Moat Lane, Towcester. They meet weekly on Wednesday evenings. Ring Simon Clark on 0327-52191 for further information.

Starting in Sutton

SUTTON COMPUTER CLUB has just held its inaugural meeting. In the future, meetings will be held monthly in the main library, Sutton, Surrey. For further details contact Jennifer Weller on 01-661 5046.

Cannock computing

CANNOCK COMPUTER CLUB meets fortnightly at the premises of Cannock Computer Systems, Old Penkridge Road, Cannock. Members own a wide range of microcomputers from the ZX-81 to the Sirius. Subscription is £3 for adults, £1 for students and there is a small charge at each meeting to cover refreshments.

Now that disc drives are available for most popular home computers David Simpson and Simon Beesley examine the whole area of mass storage and in particular drives for the BBC Micro, ZX-81 and Vic-20.

THE DISC REVOL

ONLY FIVE YEARS ago various computer industry pundits were predicting the demise of the disc drive — to be replaced by magnetic bubbles, and other more exotic storage devices.

But that was in the dawn years of personal computing, and the disc drive, even though it was expensive, mechanical, and unreliable, compared to its predicted solid-state replacements, has increased in numbers and performance while achieving previously undreamt-of price reductions.

Floppy-disc drives are now available for most of the wide range of personal computers — from 800K dual drives for the BBC, down to a 42K drive for the ZX-81. The advantages disc storage offer over cassette are considerable. Firstly, loading and saving to disc takes a matter of seconds rather than minutes; secondly the computer does not need to read through programs on a disc in sequence but can access any program at any part with equal ease.

Just as valuable a feature is the housekeeping role of the disc-operating system. By taking over the business of locating programs and finding space to store new ones, the system removes a large part of the tedium associated with cassette storage.

For the benefit of newcomers to disc drives, let us look at how a disc system works and explain some of the terms involved.

The disc itself is coated with a similar magnetic material to that used on tape. Unlike a record disc which has a spiral groove, a floopy disc stores its data in concentric tracks. It revolves inside a square protective jacket at a rate of 300 revolutions per minute. A slot in the jacket allows the drive head to pass in and out along the disc radius stepping from track to track.

This ability of the drive to move the read-write head to any track in a very short time is what gives disc systems their random-access capability. When the correct track has been stepped to, there is only a short waiting time before the required stretch of data passes across the head.

Around each track, data is stored in a blocked or sectored format and a new disc needs to be formatted before it can be used. Formatting a disc marks out every track with an equal number of sectors.

The number of tracks and the way each is split into sectors varies from system to system. On the Vic system each disc is given a format of 35 tracks with 17 to 21 sectors, while the BBC disc-filing system allocates 10 sectors to each of 40 or 80 tracks. Sectors in both these formats are 256 bytes long. Most drives can only handle a fixed number of tracks and type of drive used determines whether a disc is given 35, 40 or 80 tracks.

SURVEY

UTION

To make the hardware actually do something appropriate, software must exist in the computer. This is known as the Disc Operating System or DOS. It is usual for the DOS to be stored on one or two tracks of the floppy disc. When the computer powers on, a small program in ROM "boots up" these tracks from the disc into RAM and then jumps to execute the DOS.

Some of the latest disc systems adopt another approach which is to store the entire DOS in ROM in the computer. This allows all the RAM to be used for application programs. The three disc systems reviewed in this issue use this method.

One of the tasks of the disc-operating system is to keep track of where programs are stored. It reserves a few sectors for a directory or catalogue.

When the DOS writes a file to disc it records

(continued on next page)

ZX–81

MACRONICS SUPPLY a disc-drive system for the ZX-81 for £293 — almost six times the cost of the computer itself. Some ZX-81 owners are remarkably dedicated to the machine and the idea of forking out this amount may not seem absurb: if you have already invested in a keyboard overlay, a 64K RAM pack or perhaps a high-resolution board, fitting a disc interface must be the ultimate step in customising your ZX-81.

A surprising number of people use the ZX-81 for small business purposes and the micro may yet find its final resting place in control applications.

The dreaded membrane keyboard has an advantage here in being coffee-proof. For these uses, a disc system may also be worthwhile.

Some people clearly think so. Macronics are selling all the units they can produce, many of them to overseas buyers.

But whether it is good value or not, the FIZ interface card and disc drive certainly enhance the ZX-81. Tape loading and saving is one of the most irritating features of the ZX-81 — along with the keyboard. It is both slow and unreliable. FIZ loads an 8K program in 10 seconds and saves 8K in 20 seconds. As disc drives go, this is not fast but it is an immense improvement on cassette times. The drive also makes program storage trouble-free. We successfully saved and loaded every program first time.

The system comprises a 35 or 40-track drive, an interface card and an expansion bus, which plugs into the back of the ZX-81. The interface card plugs into the expansion bus and contains the Disc Operating System in 4K ROM, as well as 2K RAM. There is an edge connector on the expansion bus for the RAMpack or printer, and a spare slot for an additional add-on card.

Macronics use a bulky 5.25 inch Shugart drive with its own power supply, although the interface will work with other equivalent 35 or 40 track drives.

Nine disc commands are provided by the DOS. These are called through USR commands. To produce a disc-directory listing, displaying the file names of all the programs on a disc, you need to enter,

```
LET E = USR DIR
```

DIR is one of the reserved variables which contain the addresses of the command routines.

```
LET E = USR 9999
```

calls the initialising routine which assigns these addresses. Without initialising you must provide the numeric address itself.

```
LET E= USR 10008
```

for example, is an alternative way of producing a directory listing.

The command, Stat, can be used to find the length of a file on disc or the number of free sectors left. Newd formats a new disc and gives it an identifying name.

Before calling loading and saving routines it is necessary to assign the program name to FS, as in:

```
LET FS = "NAME"
LET E = USR DSAVE (or USR 10002)
```

The same procedure is required when you erase a file with the Kill command.

There is also a rather simple facility for writing and reading random-access records. Create sets up a data file with a pre-specified number of records. When the number of the record has been assigned to R and its contents to RS, Read or Write can be called.

The limitation to this option is that each record occupies a fixed length of one sector, 128 bytes, and that the number of records in a file must be given in advance.

Compared to other disc systems, the commands FIZ offers are strictly functional with no frills and refinements. Storage capacity is also relatively small. The maximum storage for 35 tracks is 42.5K and 48.75 for 40 tracks.

Nevertheless, interfacing a disc drive to the ZX-81 is something of an achievement. In the light of the micro's limitations this is quite an effective disc system. Presumably most buyers will be content that Macronics have released them from the rigours of cassette storage.

Macronics has also adapted their interface for use with the Hungarian micro-cassette drive, the MCD-1. But it will not go into production of this version until the Hungarian manufacturers manage to supply the unit in quantity. The price for the drive and interface together is expected to be around £200.

(continued from previous page)
its location in the directory. In turn, when it reads a file, it consults the directory to find at which sector on which track the file starts. In disc usage, incidentally, the term, file, covers both programs and data.

Like cassettes, floppy discs vary in quality and price. A single disc can cost from £1.50 to £2.50.

Although they usually bear such labels as 40-track, 80-track, single-density or double-density, discs arrive from the manufacturers in a blank unformatted state.

These terms indicate how the manufacturers expect them to be used and consequently the standard to which they are made and tested.

Double density refers to the number of bits of data that can be stored per inch. A double-density disc could be formatted to carry twice as much data per sector — 512 bytes for example instead of 256.

However, it is certainly possible to use double-density discs in single-density format — just rather wasteful. Similarly, at a pinch, you can write 80 tracks to some high-quality brands of 40-track discs, such as Wabash.

Double density should not be confused with double-track density which simply means 80 as opposed to 40 tracks.

One further distinction to be made is between single and double-sided discs. Some drives have two opposing read-write heads which permit them to read both sides of a disc. But, again, although all discs are coated with magnetic material on both sides, the manufacturers do not test both sides unless the disc is to be used with a double-sided drive.

As the computers are increasing in processing power, and shrinking in physical size, disc drives are following a similar course.

The floppy disc was, in its first generation,

(continued on page 38)

THE BBC MICROCOMPUTER Disc Filing system consists of several parts. There is the Model B computer; the disc interface, which is several integrated circuits installed onto the main circuit board; the disc-filing system software, which is contained in a single 8K-byte EPROM in one of the spare ROM sockets in the computer; one or more 5.25in. minifloppy disc drive and associated cables for data and power.

The majority of the disc-interface hardware functions are performed by a single Intel 8271 disc controller IC. This seems to be a strange choice by Acorn as it is now an obsolete device and thus costs in the region of £35. There are several more modern disc controllers which, because of volume production, are much cheaper and offer improved performance. Unfortunately they are not compatible with the 8271. Aside from this chip there are several TTL and CMOS chips to handle the interface to the disc drives themselves.

Having had my model B upgraded by the addition of the necessary chips at a cost of £72 plus VAT, I was dismayed to learn that, unless I also puchased an Acorn disc drive, I was not going to be able to get a disc manual or a utilities disc. I already had a pair of brand new TEAC-80 track drives which I wanted to use so there was no way I was going to buy the Acorn discs. The reason given by Acorn in their glossy brochure on the Disc system is that "the DFS manual is not supplied with the disc interface components as when used with other makes of disc drive correct operation cannot be guaranteed."

However, when I at last got to read the DFS user Guide I found, on page 81, the statement "several different disc drives may be used with the BBC computer. . ." It then describes how to set up the link options in the computer for different brands of disc drive. Surely some clarification of this contradiction is needed from Acorn as there is a considerable saving to be made by not using the Acorn drives. For example the Acorn single drive which has a capacity of 100K Bytes is £264 but a CDC drive from Microware having the same capacity is £172.

For this review I tested not only the Acorn single drive but also drives manufactured by CDC and TEAC and all performed satisfactorily. Also available from Acorn is a dual 80-track, double-sided disc unit. This is priced at £799. By shopping around it is possible to obtain many different combinations of disc capacity and price at a considerable saving over the Acorn units.

The Disc system User Guide is very well written and provides a good introduction to disc systems as well as detailed descriptions of all the DFS commands and facilities. All DFS commands are preceded by *, in common to the Machine Operating System — MOS — commands familiar to BBC owners.

Thus *Cat lists the current disc's catalog on the screen,

```
*DELETE "filename"
```

removes a file from the disc and so on.

The clever thing about the DFS is that all of the commands available in the cassette filing system of the standard computer are available, using an identical syntax, in the disc system. This means that most programs will be able to run with no modifications when translated on disc. Of course there are many more commands and functions available for use with discs. To help in using the correct syntax, the command *HELP can be typed. This then displays a list of all DFS or utilities commands, with the necessary syntax.

If an error is made when typing a command,

WHEN COMMODORE released its single-disc drive for the Vic-20, early last year, it carried a price tag of £396. This probably restricted its market to those people who were developing software for the Vic commercially, or the few owners who used the Vic for business applications.

The Vic-1540 now sells for a less daunting £300. A further attraction is that it can be adapted for the Commodore 64 by changing a single ROM chip.

It has the advantage over cheaper drives for other machines of being self-contained. No extra disc interface is required and no disc-operating software needs to be loaded into the computer: the Disc-Operating System and its related disc-maintenance commands are already built in.

The drive contains its own 6502 processor, ROM and 2K RAM. These and several other chips make it an intelligent device capable of running programs without troubling the Vic. Formatting a disc, for example, takes about 80 seconds but leaves the computer free for its own pursuits.

Since the 1540 uses the same serial port as the Vic printer you must reconnect the printer to one of the two serial interfaces at the back of the drive. By this daisy-chain arrangement the Vic can communicate with up to five devices through the one port.

Transferring data in serial rather than parallel form means that the 1540 is a little slow in disc-drive terms. It takes around 18 seconds to save a 6K program and 12 seconds to load it. This is a few seconds more than on the BBC disc system but quite fast enough for the average user.

On the plus side the Vic drive takes the same floppy discs as the BBC drives — single-sided, single-density — but formats them to give almost 170K capacity on 35 tracks. While the BBC disc system allows a maximum of 32 entries per disc, the 1540 can store up to 144 program or sequential-data files on a disc.

How easy is it to operate the Vic drive? Saving and loading are straightforward and use the same Basic commands as the cassette system — although you need to tag the disc drive's device number, eight, on the end — as in

```
SAVE "PROGNAME", 8.
```

You can also Verify a program you have saved.

The other available Basic commands are for storing and loading data files to and from disc. Print # reads data into the computer. Get # has the same function as Input # but only transfers a byte at a time. These commands must be preceded by an Open command which opens an input or output channel to a specific device.

Print # is also used to send one of the seven commands which are supplied by the disc-

this correct syntax is displayed; much more useful then something like error 25.

Some problems will be encountered when trying to run certain existing programs on the new system. This is due to the fact that user RAM under the 1.2 MOS now starts at 6400 rather than 3584. The extra 2.8K bytes is used for DFS work space. Programs such as Acornsoft's Snapper, Monsters etc are machine code programs which were assembled to load and run from location 3584, so will not work if loaded somewhere else in memory by the disc system. The solution in this case is to *LOAD the program at say 3000 and then move it down to 3584, using a short machine code routine, before running it.

Using this approach I am now able to load and run Snapper in under four seconds. Typically an 8K program takes under two seconds to load. Apart from its ability to rapidly save and load programs, what else significant is there about the disc system?

Well, all the commands listed in the Disc User guide seem to function as listed, but I have come to notice a few deficiencies in some of the commands. For example there is a limit of 31 files per disc catalogue. Now 31 may seem like a lot but with 80-track discs, which have a capacity of 200K bytes much of the disc capacity is wasted if programs are short.

The annoying thing is that the *CAT function does not give any indication of either the number of catalog entries made so far or the remaining disc storage capacity. You have to count the filenames as they are listed on the screen or else wait till the error message "Catalog full" appears!

To find out the remaining disc capacity it is necessary to use the *COMPACT function, which moves all files on the disc towards the outer tracks, leaving all the remaining space at the end.

The only other feature of the system which could be improved is the *COPY function. If only a single-drive system is being used it is necessary to swap source and destination discs when copying files from one to another. Now there is a "wildcard" filename system, where # matches any single character in a filename and * matches any number of characters allowing sya #.A* to match $, AFILE, Z.A1, B.ANAME. This means that it is possible to copy multiple files with one command.

Unfortunately, if only a single drive is available the system will copy only one of the multiple files requested before prompting for the user to swap discs. It does not attempt fill up all available RAM with data before requesting a swap.

Of course if two drives are used there is no problem, just a lot of "clacking" back and forth between drives. It is little things like this that can make a big difference to how user-friendly a system is.

Apart from these small gripes the system works very well and certainly adds much to the pleasure of using the BBC Micro. ■

operating system. Thus to delete a program from a disc with the command Scratch you would need to enter;

```
OPEN 3,8,15
PRINT # 3,"SCRATCH0: TEST1"
```

This opens a command channel to device 8, the disc drive, and then deletes the program Test1 from drive 0.

Among the other commands which are specific to disc systems are Copy which copies a program or data file to another disc or on the same disc, and Rename which changes a file name. Copying to another disc requires another drive; there is no option for making back-up copies of a disc by swapping two discs in the same drive while the operating system switches the data in and out of the computer's RAM.

NEW is the command for formatting a new disc, not to be confused with Initialise. The manual insists that every time you insert a disc you should use the Initialise command to enable the drive to identify it correctly. In practise it does not seem to be necessary.

The last two disc commands are Validate which ensures that disc space is efficiently allocated, and LOAD "S" which reads the disc directory into the computer. Listing the directory shows the names, type and size of all the files on the disc and the amount of space left.

Unusually, for Commodore, the syntax of some of these commands is not well-explained in the manual. Anyone who has used the Open command with the printer or in setting up data files on cassette will not have much trouble; but others might find the procedure for setting up, say, a sequential file a little complicated at first.

The spread of commands described should cater for most needs. Sould you want more, you will have to delve into the chapter in the manual that explains advanced disc programming. This gives detailed information on DOS structure and on a further set of disc utility commands which may be used to create random access files or devise special disc-handled routines. Finally since the Vic-1540 has been around for a while we can ask how reliable it is. Disc drives need to be very finely-engineered devices. The read-write head has to be moved over the disc rapidly and with considerable accuracy. This offers far more scope for mechanical error than on a cassette recorder.

A small survey we conducted indicated that the drive performs pretty well. One software house we spoke to has used three drives intensively over the last nine months. None of them developed any hiccups and the only problems met with came from using low-quality discs. ■

(continued from previous page)
8in. diameter and stored 250K Bytes. Then came the first 5.25in. minifloppy from Shugart. It was able to store 80K Bytes on a disc only 40 percent of the area of its big brother. In the years since the birth of the 8in. floppy the data storage capacity drive power requirements, access times have improved many times. But as the computer shrinks to pocket sized dimension, even the 5.25in. drive is too big. So next in line will be a micro floppy using a disc approximately 3in. to 4in. diameter, which will eventually store 1-2 M bytes.

Rapid introduction of the micro-floppy is being delayed by a battle raging between rival manufacturers. There are about four different drive designs which are all incompatible. Each is vying for industry acceptance and for disc-media producers' support.

Some of these microfloppies are already available to OEMs — original equipment manufacturers — for inclusion into their new products. Best known of these are the Sony 3.5in. and the Hitachi 3in. From an unusual source, Hungary, comes the MCD-1 which uses a 2.75in. disc in a hard jacket.

This competes with the other drives, all of US or Japanese origin. It will be interesting to see if a new "industry standard" comes out of the current negotiations, as happened with the 8in. and 5.25in. versions. It may well be, as with videotape, that several incompatible drives could each capture a section of the worldwide market.

Another type of disc technology that will increasingly become available for use in personal computing is the so-called Winchester disc. This features order of magnitude improvements over floppies in storage capacity and data transfer speed, for example a typical 5in. Winchester drive stores 25M bytes and transfers data at 625K bytes per second compared with 1 M Byte and 250K bytes per second for a minifloppy. Until now there have been the problems of high cost and non-removeable media with this type of drive.

The latter problem has required the regular backing-up of data on the disc to a removable medium, either many floppies or expensive digital cassette. But the next generation of Winchester discs will be smaller, cheaper and have removable discs. There is talk at present of a 3.5in. Winchester drive which will have the same outline size as the Sony 3.5in. micro floppy but storing in the order of 3-5 M bytes.

If these drives fail to satisfy your requirements for data storage there is always the newest technology of all, that is, the optical disc.

At present this comes in two versions, read only and read-write. Read-only, is typified by the Philips Laservision Video disc and the Sony CD or Compact Disc for audio use. The Laservision could be used for storing mixed video and data thus making interactive games using real pictures possible. Data capacity is a massive 18,000 M-bytes. The CD is interesting because it offers, in the size of a standard 5.25in. minifloppy drive, the capacity of around 1000 M bytes and has a data transfer speed of 500K bytes/sec.

Read/Write is of more interest to the computer user as a disc that can have data written onto it. At present even prototypes of this type of disc are "write-once" and cannot be erased. But if the new Sony 8in. optical disc prototype is anything to go by the disc has such a large capacity — 2000 M bytes — that having old unerased copies of files on the disk will not be too much of an inconvenience and in effect provides a built-in backup facility.

These types of drives are not likely to appear commercially for a few years yet so conventional magnetic discs are not likely to disappear overnight. ■

MICRODRIVE

Sinclair's Microdrive is not a true disc drive but a stringy floppy endless tape loop. Although the 100K capacity, and the data transfer rate of 16 Kbytes per second are impressive, the 3.5s. average access time will make the drive too slow for many uses. Nevertheless at a price of £50 for the drive plus £30 for the interface the Microdrive is bound to be a success when it is released in March.

Conclusions

- As disc systems go the Floppy Interface for the ZX-81 is relatively crude.
- The range of commands offered is limited and disc capacity is a meagre 42.5K. But in view of the fact that the ZX-81 was not designed to take a disc drive the FIZ is an impressive achievement.
- It greatly facilitates storage on the ZX-81 and can be recommended to anyone who is committed to using the ZX-81 for serious applications.
- The Vic-1540 comes conveniently equipped with a disc-operating system and just needs to be plugged into the back of the Vic.
- Although the system is comparatively slow and not as easy to use as, say, the BBC disc system it provides a useful set of commands and functions.
- Disc capacity is substantial — for a 35-track single density disc — at 170K with up to 144 directory entries.
- The drive appears to be well made and reliable.
- The BBC Disc system enhances the operation of the already very well designed fundamental machine.
- All DFS commands are easy to use and have a logical and consistant syntax. There could be a limitation to the full use of available disc storage capacity, especially for 80 track drives, because of the restriction to 31 files per disc catalog.
- The disc filing system appears to work very well with different brands of minifloppy disc drives.
- It is well worth shopping around for alternatives to the Acorn disc drives in terms of value for money. ■

A totally portable computer that runs on its own power supply for use anywhere.

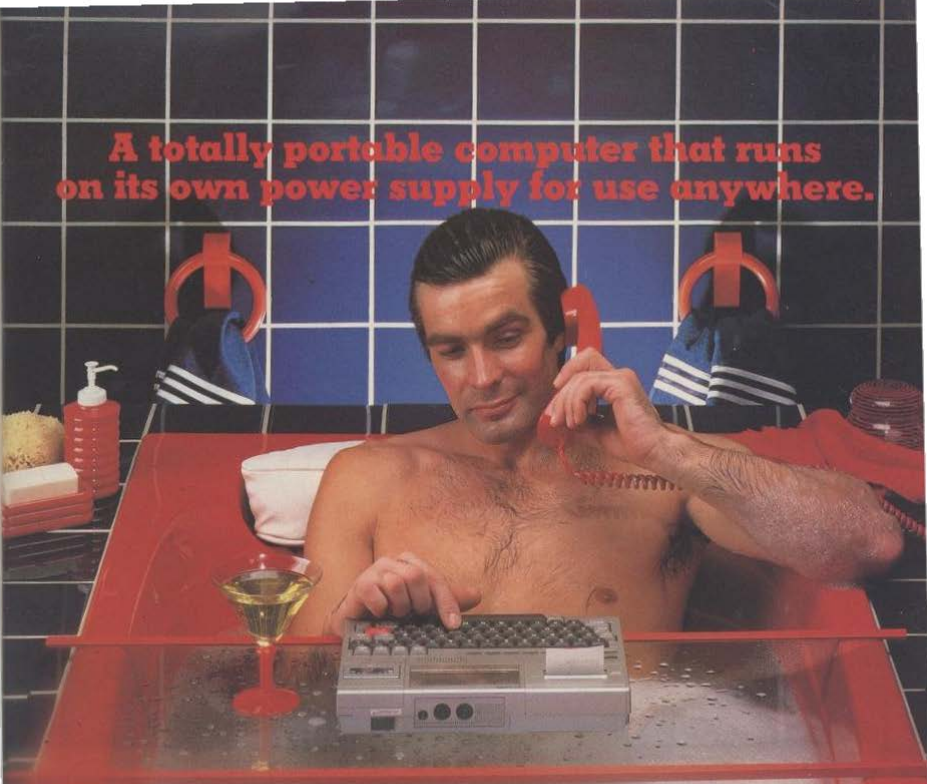

It could mean the end of the rubber duck as we know it.

The HX-20 is a portable computer with a full size typewriter keyboard, LCD Virtual Screen, printer and micro-cassette facility actually built in. A computer with a rechargeable power source that's large enough for writing programs and manipulating data virtually anywhere, yet small enough to carry in a briefcase.

But don't let the size fool you. The HX-20 is not a gimmicky toy or an excuse for a calculator. It's a precision machine using a full extended version of Microsoft BASIC with 16k RAM, optionally expandable to 32k and 32k ROM expandable to 64k, RS-232C and Serial interfaces. The ASCII typewriter keyboard and five programmable keys brings ten separate program functions to your fingertips.

Power to your elbow.

The HX-20 runs on its own power supply for over 50 hours and can be easily recharged overnight, or whilst in use, with the ability to retain its memory in RAM even when switched off.

Keeping you in the picture.

The LCD screen is unique – showing any 20 characters by 4 lines at a time – enabling you to carry out word processing or data entry as if you are using a large screen.

Print Out. Built In.

The 24 column dot matrix impact micro-printer offers 42 LPM in a crisp, precise 5 x 7 matrix for perfect hard copies. Every time. And you can choose from a wide range of peripherals from bar code readers to acoustic couplers for total capability.

Epson. Reliability through Research.

You'll find our name on a highly successful range of computer printers. So you can be assured of the same quality and reliability through an extensive research programme prior to the launch of any Epson product.

Write or call us for further details and the name of your local stockist (because seeing really is believing).

You'll find that the HX-20 is the most complete portable computer you can buy. It could even change the face of bathtime.

Which is a bad day for ducks.

Epson (UK) Limited
Freepost
Wembley, Middlesex HA9 6BR
Freefone: 2730
Telex: 8814169

HX-20
PORTABLE COMPUTER

EPSON

Extraordinary product. Exceptional quality.

KRAZY KONG. A 100% machine code program with 3 screens of HiRes Gorillas barrels, fireballs, ladders, lifts and a running and jumping man. Unbelievable? See it on your 48K Spectrum @ £5.00.

GORFIAN INVADERS. A superb 4 Screen machine code program with Invaders Galaxians, Firebird and Flagship, for your 48K Spectrum @ £5.00.

FROGGER. 2 screens, m/c full colour, Cars, roads, logs, river, riverbank, and turtles plus fantastic sound effects and music, for Spectrum @ £5.00.

SPECMAN. Probably the best version of its type great machine code graphics and Sound effects with 3 to 5 ghosts and a real muncher that munchies in all directions unlike some cheaper versions. For any Spectrum @ £5.00.

CITY BOMBER. Another great program with clever sound effects and brilliant graphics comes with 7 other games on the SPECTRUM Arcade pack @ £5.00.

ZX81 SCRAMBLE. Full 2 screen machine code program comes with M/C Invaders M/C Galaxians plus three more on the ZX81 Arcade Pack @ £5.00.

These programs are available at around 50 nationwide specially selected Computer Software dealers and by Mail Order directly from us. Access and Visa card orders on 24hr. Answering Service 061-366-8223.

Please send orders to C Tech Software, 184 Market Street, HYDE, Cheshire SK14 1EX.

Dealers, isn't it time you too sold Software as good as this?

BBC I.J.K.'s RANGE OF QUALITY SOFTWARE CONTINUES TO EXPAND... BBC

MODEL A/B
Cassette 1: Star Trek/Candy Floss (very popular) **£6.50**
Cassette 2: Family Games (hours of fun) **£4.50**
Cassette 3: Mutant Invaders/Breakout **£6.50**
Cassette 8: Model A Invaders (M/C) **£5.50**

MODEL B (or A+32K)
Cassette 4: Beeb-Beep (Super Simon Game) **£4.50**
Cassette 5: Beebmunch (full colour Munchman) **£6.50**
Cassette 6: Super Hangman (animated, educational) **£4.50**
Cassette 7: 3D Maze (fast and intricate) **£4.50**

CASSETTE 9
Contains model B Invaders. A superb feature adaptation of the arcade 'Space Invaders' game in machine code and hi-resolution colour graphics for the BBC Micro model B (or A+32K). Play normal game or choose from the many options including Missile, Bomb and Invader speeds. Invisible Visible and Shields no Shields. Quite simply the best.
Only £7.50 for MODEL B (or A+32K)

CASSETTE 10
WORDPRO. Cassette based word processor for either Epson or Seikosha printers. Features right hand justification, alter, insert, delete, pages to tape, printer mode changes from within text line etc., etc. Complete with manual.
Only £10.50 inc. **for MODEL B (or A+32K)**

CASSETTE 11
ATLANTIS. The superb fast action arcade game written in machine code to illustrate to the full the machines fantastic colour graphics and capabilities. This game includes all the usual ATLANTIS/SCRAMBLE features. Guide your submarine Nautilus along the undersea landscape and through the caverns avoiding mines, depth charges, rockets, jelly fish, serpants etc.
Only £7.50 inc. **For MODEL B (or A+32K)**

CASSETTE 12
FLAGS. A superb educational program. The flags of the world are drawn in hi-resolution colour graphics. The program then tests your knowledge of flags and geography. Have fun while learning.
Only £4.50 inc. **For MODEL B (or A+32K)**

BBC Micro Games

CASSETTE 13 - HYPERDRIVE
A new, very addictive machine code arcade game. Guide your laser tanks around the network of passages destroying the drone Aliens - but beware, evil OTTO lies in wait!
Only £6.50 inc. **For MODEL B (or A+32K)**

CASSETTE 14 - STRATOBOMBER
Another new highly colourful machine code arcade game. Can you keep the enemy fleet at bay long enought to destroy the nuclear reactor of the rogue Star Ship before it destroys your home planet? Superb graphics.
Only £7.50 For MODEL B (or A+32K)

Deduct £2.00 when ordering 3 or more cassettes

WE'RE EXPANDING TOO... NOTE OUR NEW OFFICE ADDRESS AND CUSTOMER SERVICES

ALL PRICES FULLY INCLUSIVE OF VAT AND P&P - NO MORE TO PAY!

- All Programs will run on all operating systems
- All software in stock before we advertise
- Send SAE for Brochure

IJK Software Limited

9 King Street,
Blackpool, Lancashire

(0253) 21555

24 HOUR ANSAFONE

48 hour despatch

OFFICES OPEN
10am - 5pm Tues-Sat

BBC MICRO GAMES

LYNX

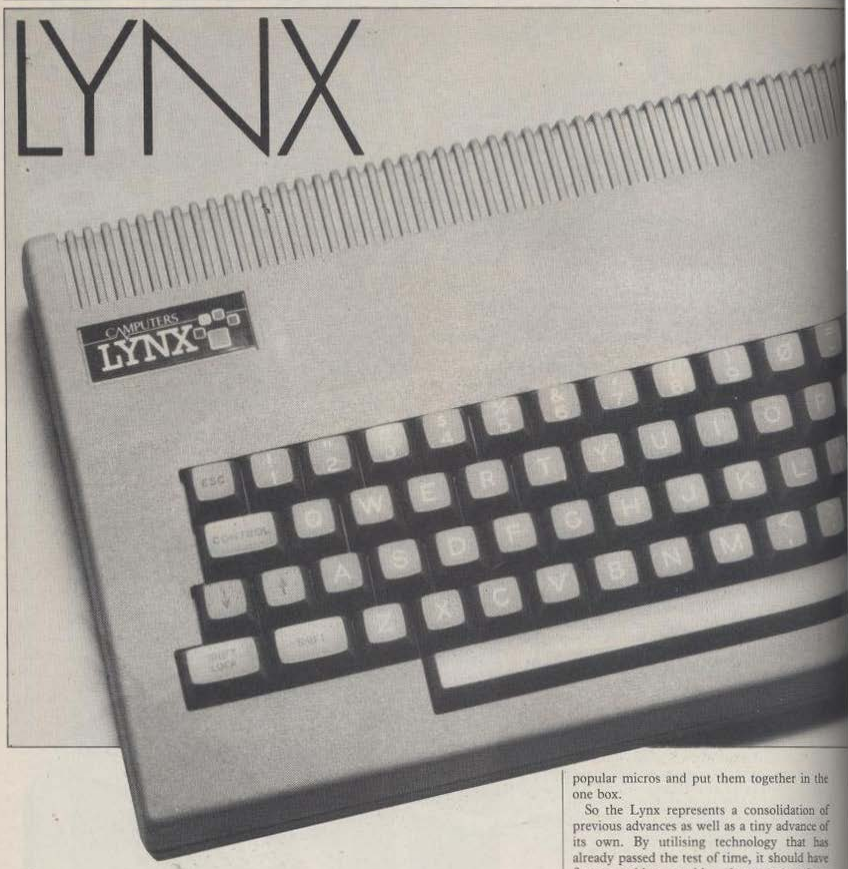

Fun at home — effective in the office. Will the Lynx's wonder ingredient CP/M make Camputers' claims for its elegantly-styled 48K colour computer wash whiter? Bill Bennett put it to the test.

THERE ARE two ways of making money from engineering — and the same rules apply whether you are a car manufacturer or a computer designer. The first way is to produce some astounding new idea or gimmick, and pray that the idea catches on. This is a risky business, but it can pay huge dividends: for example, there was the ZX-81 and the model T Ford.

The other way is less fraught with danger, but then the designer stands to gain less too. It involves looking at existing engineering ideas and combining a number of them in a new way. This is what has happened with the Lynx.

The Lynx is simply a good micro. It has no wonderful outstanding qualities, but in every department of its specification it ranks alongside the best. It is as though the designers took the best features of all the popular micros and put them together in the one box.

So the Lynx represents a consolidation of previous advances as well as a tiny advance of its own. By utilising technology that has already passed the test of time, it should have fewer teething troubles than some micros which aim to break new ground.

The standard Lynx has 48K of user RAM, which leaves 16K for programs and data when in the high-resolution graphics mode. This can be expanded inside the case in steps of 64K up to a total memory size of 192K. The high-resolution graphics mode really is high resolution with 248 by 256 pixels.

Excellent track-record

The Lynx is based on the Z-80A microprocessor, which has an excellent track-record as the chip at the heart of the Sinclair Spectrum. The choice of processor has a number of implications. First, and probably in the long run, most importantly, it means that the Lynx is CP/M-compatible.

CP/M is the operating system most widely employed by the larger microcomputers used

REVIEW

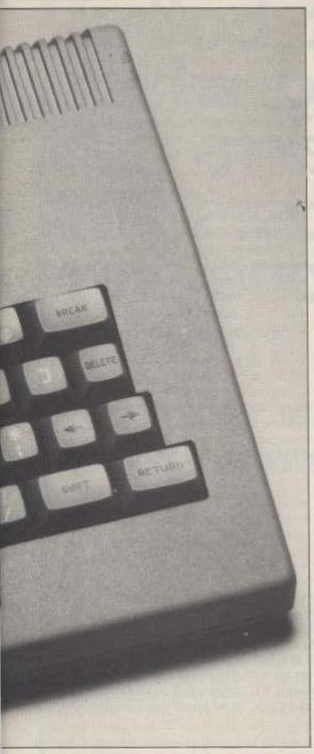

in business. It handles files of data on the floppy discs those larger micros use. The most important thing to bear in mind is that in theory a program written in CP/M on one machine can be transferred to another machine with the minimum of fuss.

Of course in practice there is nearly always a good deal of fuss, but it does allow the user access to thousands of computer programs and systems, as well as a growing number of databases that are being made available on CP/M. CP/M is far from perfect, but it is the operating system that comes nearest to ironing out all the differences between various microcomputers.

To run CP/M, a computer needs a minimum of 64K of RAM — hence the importance of the ease of memory expansion on the Lynx. The upper limit of 192K means that some very substantial software packages will run on the machine.

Most people thinking of buying a Lynx will probably not be interested in CP/M software immediately. It is, however, very reassuring to know that should your hobby ever become more than just that, you will not have to throw your Lynx away and buy a new micro.

The second significant implication of that Z-80A processor is that it makes the Lynx a possible upgrade for those ZX-81 users who do not want a Spectrum. The Lynx is more powerful than the Spectrum but then it costs £50 more. But what will attract people is a simple-to-use machine-code facility.

Machine code is the language a computer uses internally, as opposed to the Basic which is really there for the benefit of humans who, unlike computers, do not normally think in binary. When a program is written in Basic, each line has to be converted into machine code every time it is acted on, and that conversion takes some time. As anyone who has played a machine-code game will be able to tell you, machine code works much faster than Basic.

The monitor in the Lynx's ROM allows the user to write and edit programs written in machine code. It also means one can save and load these programs to and from tape. The other advantage of machine code is that programs require far less space than Basic programs — and with 48K of RAM at your disposal, some substantial programs can be written.

Code-shy manual

The manual rather coyly shies away from the subject of machine-code programming. There is a chapter on the subject, but this is only for those who already know something about it.

Some interesting commands are available to the brave souls prepared to grapple with machine code, all of which are available from Basic. This means that the main part of the program can be written in Basic, with machine-code routines handling those features which require speed, such as graphics or sound. Not only is there the Poke command — which will be familiar to experienced programmers — but also the DPoke command which Pokes to two bytes at a time.

Music-making

The command Code allows you to store machine code in a Basic line. LCTN is in effect a pointer to the first byte of machine code stored in a Code line: it is used like an ordinary variable. Type Call to tell the computer to execute the machine-code subroutine held in one of the Code lines, which is specified by LCTN.

Bytes of data can pass into and from the Lynx via the I/O port at the rear. This can be done using the commands INP and Out. The music-making facility of the Lynx is limited when in Basic. A Beep statement is all that is open to you. This is a major disappointment on a number of counts.

First, the box in which the Lynx is supplied promises a digital-to-analogue sound converter. This turns out to be little more than a small speaker. The Beep statement also disappoints because rather than entering a note name — or even a number corresponding to a particular note — you have the following format:

BEEP wavelength, number of cycles, volume

The volume can be any number between 0 and 63. To be able to hear anything you are obliged to use 63 all the time, which is regrettable as it reduces the flexibility. The wavelength and the number of cycles have to be calculated beforehand. Furthermore, I am not convinced that the wavelengths are that accurate in practice.

If microcomputer manufacturers paid a little more attention to the sound possibilities of microcomputers, the results would be astounding. A good example of this is the way in which sounds can be "synthesised" using

(continued on page 45)

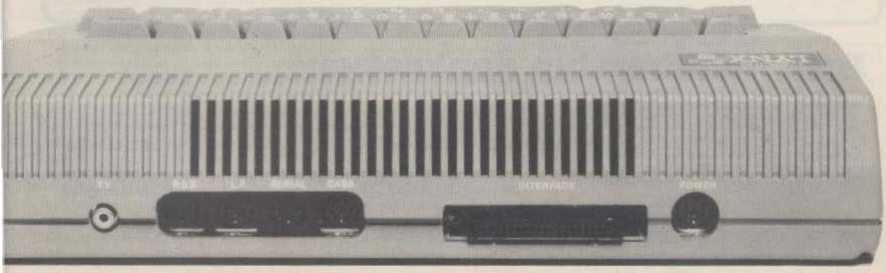

? Don't bother guessing which programs our members are saving money on this month.

If you use a BBC, Dragon, Spectrum, VIC or ZX81 computer and you are not yet a member of THE MICROCOMPUTER SOFTWARE CLUB, then only those with the VIC can be forgiven. We have only just added the VIC to our coverage.

Membership of The Microcomputer Software Club would save you money and trouble. Each month we thoroughly test and evaluate the many programs issued by the growing number of producers - including Pixel, IJK, Bug-Byte, A & F, Campbell, C-Tech, and the smaller companies that you may find it difficult to keep track of. If a program is good, and it has got to be very good, it is recommended to our members in the next issue of the Newsletter.

All the programs that we recommend are made available to our members at very low prices. For example, a Bug-Byte program usually costing £10.00 would be offered to members at £9.00 or less. A saving of at least 10%. Every month we select what, in our opinion, is the overall best program for each computer and this MAIN CHOICE program is offered to members, for one month only, at an average 20% less than the normal price. A MAIN CHOICE program usually costing £6.00 would, therefore, be available to members at about £4.80.

Every month members receive, free of charge, our Newsletter full of information on the programs we have found suitable for recommendation. The range is large, including adventure, arcade, standard games, household, financial, educational, wordprocessing, and utilities. Ordering from the Newsletter is simple and quick and, of course, quality is guaranteed.

JOIN THE CLUB AND WE WILL TELL YOU, FOR FREE

Membership is completely free of charge, and receipt of the Newsletter is automatic. Members are under no obligation to purchase a fixed number of programs from the Club. They buy what they want when they want in the full knowledge that they are buying the best programs at the best prices. So, if you own or use a BBC A or B, Dragon, Spectrum (both versions), VIC (expanded or unexpanded), or ZX81 (16k), join the Club. It will cost you nothing, and save you a lot.

JOIN TODAY

THE MICROCOMPUTER SOFTWARE CLUB
P.O.Box 166, Oxford, OX2 9BJ, England.

THE MicroComputer SOFTWARE CLUB

Free membership application

Please accept my application and enrol me as a member of The Microcomputer Software Club. I understand that membership is free of charge.

As a member I will receive the Club Newsletter free of charge and will be entitled to benefit from any savings offered to members on selected programs for microcomputers. I may cancel my membership at any time.

When completed, return form to:-

THE MICROCOMPUTER SOFTWARE CLUB
P.O.Box 166, Oxford, OX2 9BJ, England.

NAME
ADDRESS
CITY
POSTCODE AGE (If under 18)
COMPUTER MODEL COMPUTER RAM
SIGNATURE

(continued from page 43)
machine code on the Lynx.

The Sound command is a good idea, which allows interesting possibilities, but a few Basic statements could be a more powerful. Sound works by outputting a number of bytes of memory through the speaker. With a memory of 48K, relatively complex sound patterns can be acheived. Sadly there is only one voice channel, but even with this restriction good effects are still possible.

Speech synthesis

Speech synthesis is also a feature according to the manual, but the output is so quiet that you may never hear it. By connecting a analogue-to-digital converter, the Lynx could take noises, store them in memory and replay them. Even processing of stored sounds is possible. I managed to synthesise white noise by feeding the loudspeaker a series of random numbers.

The documentation concerning the Sound command is woefully short in the manual. For a command like this giving no examples is really not good enough. More to the point, those who use the Beep command are not even given a list of which wavelength corresponds to which note in the musical scale. On the whole the manual is not as comprehensive as it should be.

It is a glaring failing for a home computer manual like this one not to have a proper index which allows users to find the information they require quickly. It might be right to omit information which is readily available elsewhere, but I cannot see why facts relevant to the Lynx are missing. As a teaching manual, for someone who wants to learn about computers, it is adequate, and certainly better than the Dragon manual.

The Lynx has a number of commands and language features not seen elsewhere, giving the machine a particularly strong, if a little odd, version of Basic. I like the structures, Repeat-Until, and While-Wend. They give Basic a class not normally associated with it. I also like the automatic indenting. It really does make programs easy to read and, more importantly, easy to debug.

Old favourites

Lynx Basic has all the old favourite commands, including the now essential Trace to let you know where things have gone wrong. Swap is interesting as it allows you to swap the values of two variables. Pause will hold up the computer for a specified amount of time. UPC$ is a string function that converts all the letters to upper case.

Among the commands used in the tape operating system are Append which permits you to add subroutines to the end of a program, and MLoad which loads machine code from tape. The baud rate can be selected using the Tape command. Like the BBC micro, the Lynx allows Procedures, which will keep the educationalists happy — they like structured programming.

The graphics on the Lynx are perhaps its strongest feature. Resolution is high, and unlike most other home computers all eight colours can be mixed on the same screen. There are 256 by 248 pixels, and a good set of commands to use them to create some very good graphics.

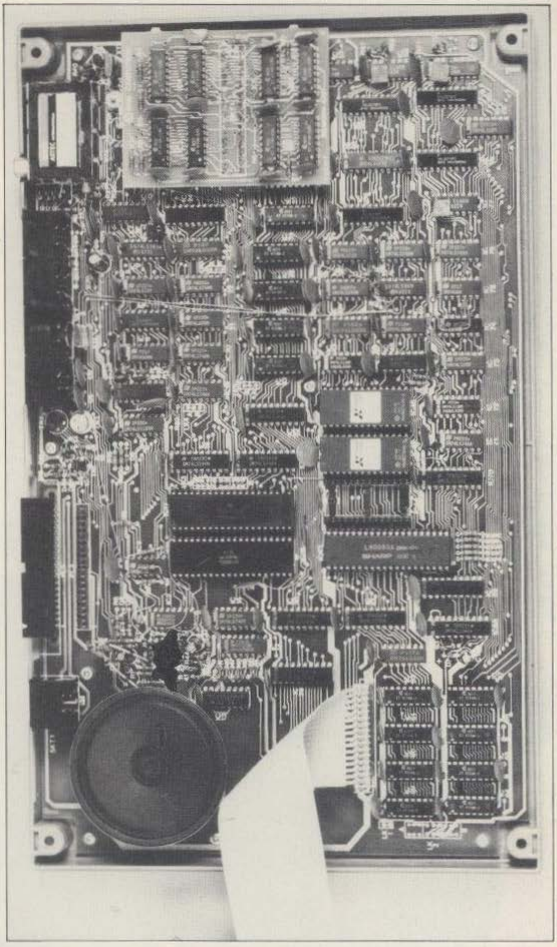

Window is a strange command which disables part of the screen, allowing writing only within the window area specified. Print@ allows printing to start at any given pixel location on the screen. This means it is possible to print subscripts and superscripts, a useful facility for writing mathematical or chemical formulas on the screen.

There are commands which let you play around with the cursor, and a VDU command which is not as complicated as the BBC VDU command.

CONCLUSIONS

- The Lynx is an attractive little machine, but offers nothing spectacularly new.
- It is good value, and does have some very interesting expansion possibilities — especially when it becomes part of a CP/M system.
- The real keyboard, high resolution, and machine-code monitor make it a natural "next computer" for people wishing to upgrade on last year's model. ■

ORIC 1

ORIC IS EVERYTHING you hoped it would be. Alive with colour, and zapping with built-in sound effects, the Oric looks like a match for any machine now selling for less than £200. Oric is also everything you feared it might be — just when you thought it might be safe to go back into home computing.

The £99 16K colour computer is the first to break the £100 barrier. Outwardly there is nothing to distinguish it from the £169 48K version. Both are grey plastic wedges measuring 11in. by 7in., designed to present the keyboard at the same angle of attack as a typewriter. Height is 0.75in. at the front rising to 2in. at the back. Overall the Oric is half as big again as the Spectrum and 50 percent heavier.

This slope coupled with the design of the keys makes the Oric an easy machine to touch-type on. Although the keyboard uses a rubber sheet pressing directly on to a Sinclair-style keyboard, like the Spectrum, typing feel is much improved by capping each key with plastic. Not only does this remove the "dead flesh" feel but it also gives the impression of positive click keys. A note sounds every time you depress a key, with a lower note distinguishing return and control keys — but if you do not want to sound like the telegraph operator in a bad western Control F turns off this keyboard bleep.

Layout of the keys is relatively standard and as the Oric does not have single-key entry it has been possible to label them clearly. The white on black lettering is not pretty but it is unambiguous. Although the keys are quite small except for an oversize return key and a full-size space bar, overall the Oric emulates the feel of a portable typewriter. All keys have auto-repeat and there are four keys dedicated specifically to cursor control. It is certainly easier to type on than any of Sinclair's offerings.

Switching on the Oric produces a screen display of a white screen with a black background. Black lettering informs you that you are in Oric extended Basic O 1.0 © 1983 Tangerine, followed by the number of bytes free and a ready message. If you Control T into capitals the message Caps appears in white just above the top right-hand corner of the white box. Likewise if you are loading a program from cassette by CLoading "Name" the message Searching appears in white just above the top left-hand corner.

When you want to break out of dreary monochrome the Ink and Paper commands allow you to choose your own foreground and background colours. Numbers 0 to 7 offer you black, red, green, yellow, blue, magenta, cyan and white. Colours are comparable in quality with the Spectrum but there is no facility to change the border colour. The control key gives access to double height and flashing characters.

REVIEW

What goes zap and ping, is red and yellow and green and blue all over, runs at millions of cycles a second, can remember 16,000 bytes of information and costs only £99? Now there is an answer — the Oric. It is still only three years since Sinclair produced the world's first ever £100 computer — the 1K, silent black and white ZX-80, only 18 months since Commodore produced the first £200 colour computer. Meirion Jones looks for the catch.

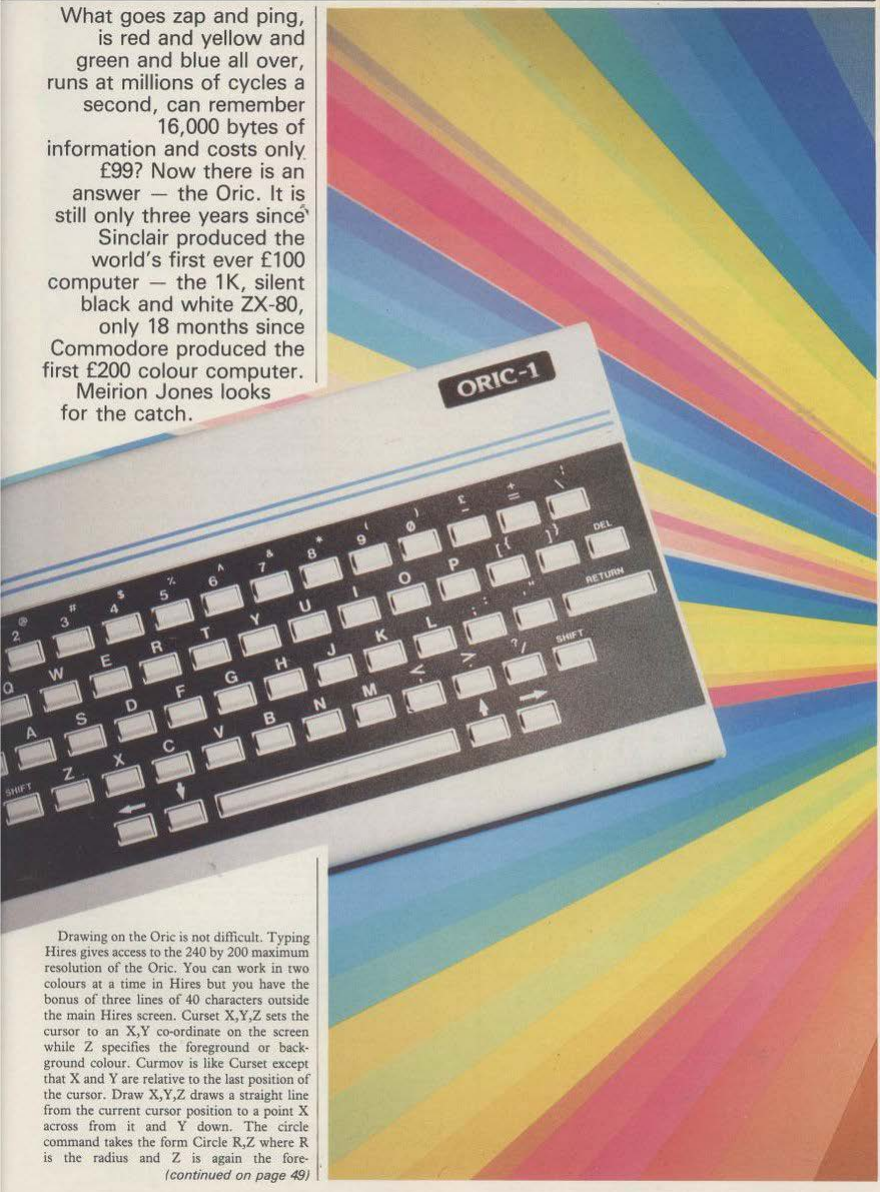

Drawing on the Oric is not difficult. Typing Hires gives access to the 240 by 200 maximum resolution of the Oric. You can work in two colours at a time in Hires but you have the bonus of three lines of 40 characters outside the main Hires screen. Curset X,Y,Z sets the cursor to an X,Y co-ordinate on the screen while Z specifies the foreground or background colour. Curmov is like Curset except that X and Y are relative to the last position of the cursor. Draw X,Y,Z draws a straight line from the current cursor position to a point X across from it and Y down. The circle command takes the form Circle R,Z where R is the radius and Z is again the fore-

(continued on page 49)

WANTED!

PROFESSIONAL ADVENTURERS TO UNDERTAKE THREE DANGEROUS MISSIONS

You will need a quick agile mind, a rock-steady hand, and nerves of steel to survive. Your reward will be treasure beyond the dreams of man and the satisfaction of going where no man has gone before.

Special Competition with over £3,000 in prizes.



CASTLE OF RIDDLES

Win over £3,000 in prizes in the fabulous Acornsoft/ Your Computer competition. Entry form on every pack.

Enter the warlock's castle, solve the riddles, and regain the ring to become 'King of the Ring'.

PHILOSOPHER'S QUEST

A fascinating adventure in a world of fiendish puzzles to be solved. To complete your quest—think hard about everything you do.

SPHINX ADVENTURE

A full-sized classic adventure game in which you move through caves, fight with trolls, collect treasure and finally make your way to the sphinx to collect your reward.

All the adventures can be run on the BBC Microcomputer Model B and cost £9.95 including post and packing.

Acornsoft Limited c/o Vector Marketing Ltd, Denington Industrial Estate, Wellingborough, Northants NN8 2RL.

To: Acornsoft Limited c/o Vector Marketing Ltd, Denington Industrial Estate Wellingborough, Northants NN8 2RL.

Please send me the following adventure games.

Philosophers Quest	SBG01 . . . (qty) at £9.95	=
Sphinx Adventure	SBG07 . . . (qty) at £9.95	=
Castle of Riddles	SBG17 . . . (qty) at £9.95	=
	Total	

I enclose cheque no _____ or please debit my Access or Barclaycard no _____

Please Print

Name: _____

Address: _____

_____ Postcode: _____

Signature _____

DRAGON 32

NEW FROM

TROJAN

"SPACE TREK"

Space Trek is an absorbing space wars game in real time which can be played in any of four levels. Special features include:—

Onboard battle computer.

A galaxy containing 100 quadrants.

Impulse and warp drive speeds.

Long range galaxy scanning.

Shield control and status reports.

THIS GAME IS A MUST FOR DRAGON USERS. APPROVED BY DRAGON DATA LIMITED.

Send to:

TROJAN PRODUCTS
Dept. YC
166 DERLWYN, DUNVANT,
SWANSEA, WEST GLAM SA2 7PF

Please send me "SPACE TREK" for my DRAGON 32. I enclose cheque/P.O. for £7.50 which includes P&P.

MR/MRS .....

ADDRESS .....

.....

PROGRAMERS DREAM (SPECTRUM)

P.D. is an advanced TOOLKIT adding the following extra features to the standard SPECTRUM.

(1) RENUMBER (INCLUDING THE FEATURES OF RENUMBER DELETE).
(2) BLOCK MOVE AND RENUMBER.
(3) BLOCK OR LINE ERASE.
(4) CHANGE STRINGS (AS SELECTIVE AS REQUIRED).
(5) DUMP (VARIABLE NAMES AND VALUES).
(6) DISPLAY PROGRAM AND VARIABLES SIZE.

If you need a speedy M/CODE program that will RENUMBER, CHANGE all or some of your variable or string names. Change commands, string contents, MOVE whole blocks of program and RENUMBER them to fit into available gap. Print to the screen the final or developing values of the program variables, inside a FOR NEXT LOOP if required, to display the size of your program with or without variables. To erase instantly lines or blocks of text then you need PROGRAMERS DREAM. The whole program is just 1450 BYTES of fast M/CODE and requires only a single line of BASIC to control it. Furthermore this powerful debugging tool is complete with explicit instructions and costs just £7.00.

SPECTRUM RENUMBER DELETE

Just 600 BYTES of fast MACHINE CODE. Controlled by a single line of BASIC (A 9999 REM) into which the START, NEW START, INTERVAL & STOP NUMBERS are entered. A BLANK REM gives an AUTO 10 RENUMBER. Resolves leading jump numbers in expressions and non-existent jump numbers if affected by a renumber pass. All GOTO, GOSUB, RUN, LIST, LLIST, RESTORE JUMP NUMBERS ARE CATERED FOR. NO EXTRA WORK. The last altered jump number can be flagged by listing after a pass. Full legality checks and ERROR REPORTS. DELETE simply requires a start and stop number and it's ready. Call from BASIC or immediate mode. Quick, clean and easy. "You won't buy a better RENUMBER program for the SPECTRUM." £5.00. inc VAT and post.

SPECTRUM DISASSEMBLER

Your flexible friend. By using the printer buffer for temporary storage this program allows you to format output as required. Its output is a clearly defined 12 CHARACTER mnemonic although 9 will suffice. This can be printed to the screen in one or more columns, or to the ZX printer, into an array for later printing, or use it with your M/CODE loader program. All 1,2,3 and 4 BYTE Z80 op-codes handled. Also included are the calculation of both absolute and relative addresses plus SPECTRUM RST literals. Switch literals on and off to print TABLES and other FLAGS. Complete with a demo program in order that you may extract the best from this excellent program. This may be the key to your understanding of the SPECTRUM. JUST 1500 bytes of fast M/CODE it's flexible and will even disassemble itself. JUST £5.50. INC.

DI-LOADER

All the features of the disassembler and more. Disassemble CODE as you load it. Backtrack. INSTANTLY create an insertion gap, or DELETE any amount of CODE. Use LITERAL SWITCHES, RESTARTS or STOPS. Auto RAMTOP setting loads CODE at given address. Display features ADDRESS, CODE, Z80 MNEMONIC AND ASCII. Program holds M/CODE in BASIC to preserve RAMTOP for the loaded CODE. Only 4692 BYTES. Speed your understanding of M/CODE PROGRAMMING. Full instructions. £7.00.

ALL THE ABOVE M/CODE UTILITIES ARE POSITION INDEPENDENT FOR LOCATION. ABOVE A RAMTOP OF YOUR CHOICE.

WORK FORCE
140 WILSDEN AVE, LUTON, BEDS.

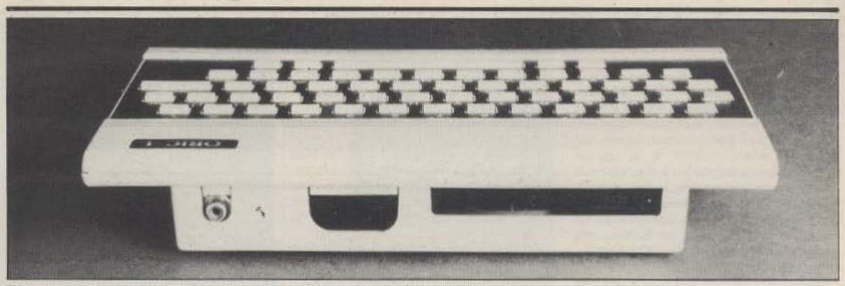

Back view reveals, left to right: TV output, RGB monitor, cassette, Centronics interface, expansion port and power input.

(continued from page 47)

ground/background colour. The Fill command operates over 40 cells in 200 rows, but there is no Paint command as on the Dragon. A Pattern command allows you to draw dotted lines of any sort.

Char A,S,Z allows you to type text on to screen in Hires somewhat painfully. A is the ASCII code of any letter you want to print and Z again the foreground/background colour. S can be either 0 for standard character set or 1 for the alternative teletext-style character set which the Oric carries in readiness for the £79 Modem which will connect it with Prestel and the outside world.

The Oric normally saves at 2,400 baud but it also allows you to save at 300 baud for extra security. Machine-code subroutines can be saved by specifying start and end addresses. You can also Auto-save so that your programs will run as soon as they have loaded.

What marks the Oric out from some of the older machines is that it has been designed with an awareness that 1983 will see computers being used increasingly for practical purposes. The built-in Centronics interface will make it easy to plug in a printer or other peripherals. Oric will soon be selling a Modem so that Prestel will become available. Owners will be able to accept telesoftware — programs loaded straight down the phone line — eventually electronic mail could come into the home by the same route, and with the addition of a tape recorder the Oric with its Modem could become a telephone answerer and message taker.

Forth on the way

An RGB output allows you to power a monitor if the television display does not meet your exacting standards. An expansion socket accepts plug-in ROM cartridges for games or for other languages such as Forth, which is being written for the Oric at the moment. There is some confusion as to whether the Oric will accept joysticks but the four cursor keys and space bar all in a line are ideal for games which pit one human at a time against the computer.

The Oric is based around the 6502 processor so the internal workings should not frighten anyone used to conversing in hex with an Acorn Atom or BBC or for that matter a Vic-20. Unfortunately it may dissuade Z-80 machine-code enthusiasts from moving up from their ZX-80s and ZX-81s.

The Basic is a relatively standard Microsoft but the lack of single-key entry should not deter beginners. Editing is made easier because the delete key does not require a shift. Control X deletes the line you are entering and entering Edit puts you in editing mode. Edit line number sends the cursor to that line where it can be controlled with the arrow and delete keys. Escape allows you to insert characters into the edited line. List only lists specified lines or the whole program but can be controlled with Control S.

A good speaker and built-in noises get the Oric's sound off to a good start. Typing Zap, Ping, Shoot or Explode produces convincing arcade game noises which can easily be incorporated into any program. Control G produces a continuous ringing sound. Instead of the mumblings of the Spectrum the Oric delights in Sound, Music and Play commands. Sound and Music define the type of sound while Play shapes them. Sound consists of noise channel which can be mixed with any of three tone channels at any of 15 fixed volume levels — or a variable volume level to be defined by Play. It also defines the period of the sound. Music gives a choice of notes across six octaves. Play enables noise and tone while offering seven choices of envelope to shape the sound.

One of Oric's backers is British Car Auctions but, if they thought they were moving into an area of business with a better reputation with consumers than selling second-hand cars, computing may not have been the best choice. It would be unfair to single out Oric Products International because many of the people who have now waited three months for the Orics they ordered on 28 days' delivery only ordered one because they had given up on ever receiving the Spectrum they had ordered when Acorn failed to deliver the BBC on time.

Not enough thought has gone into the simple things. Detail changes to the design could have made the Oric look far more up to date. The mains lead from the built-in transformer in the plug is annoyingly short and the plug into the back of the machine is so shaky that unless it is taped into place you could lose whole programs that you have painstakingly typed in. Doubtless Oric will soon put these details right and produce a proper manual. It would be a pity if a good machine at a bargain price were to be spoiled for a ha'porth of tar.

CONCLUSIONS

- With 16K for £99 and 48K for £169, Oric 1 remembers more for less money than any other colour computer.
- Oric offers six true colours in addition to black and white. Any two can be used in high resolution.
- Sound is loud and clear — not just a muddy bleep. Channel, octave, note, period and envelope can all be controlled. Built-in sound effects will be useful for games.
- The keyboard is an improvement on the Spectrum's but a real typewriter keyboard would have been much better and would, perhaps, only have added another £10 to the price.
- The Oric has been designed for the real world. A built-in Centronics interface makes it easy to plug in printers and peripherals — whereas Spectrum buyers will have to pay £20 for an RS-232. Oric's Modem should also be available months before Sinclair's.
- Oric's first manual was disastrous — it was clear that the writer had never laid eyes on an Oric. The manual has been corrected, and is now merely inadequate. The full manual should be available in the near future.
- The 6502 CPU is already familiar to Acorn and Commodore specialists so there should be no shortage of software.
- Once teething troubles have been overcome the £99 Oric will become the ideal beginner's machine.
- Oric lacks single-key entry but this a mixed blessing, and the Basic is conventional.
- Problems with fluctuating modulators may cause production delays. Sinclair cannot hope to bring out the ZX-83 much before autumn this year — but if the Oric becomes a threat he might alter the specification of the Spectrum or cut its price. Potential Oric buyers should also remember that the Electron and the Binatone may appear soon. ■

ATARI

Jack Schofield scans the screen for quality as he tries his hand at the latest Atari games.

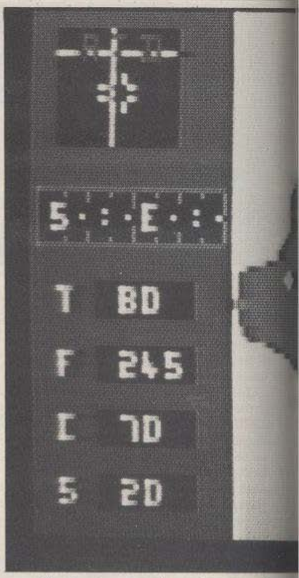

THERE IS NO doubt in some people's minds which micro has the best games — it has to be the Atari. But the games are more expensive than the average, which makes it very important to try before you buy. Who can afford to spend £20 or £30 on a game and not play it?

Many of the Atari computer games are reasonably accurate copies of the arcade versions. That means that for a few pence you can try arcade versions first. In this category are Centipede, Pac-Man, Defender, Asteroids, Space Invaders and Missile Command, all by Atari, and Midway Gorf by Roklan, and English Software's Airstrike, which is a version of Scramble.

Arcade games are fast and furious, because they are designed to extract another 20p from your pocket as quickly as possible. Home computer games can on the other hand be much more challenging and absorbing to play. Examples are Atari's Star Raiders and Eastern Front 1941 and from Thorn EMI, Jumbo Jet and Submarine Commander.

Star Raiders, held by some to be the best computer game of all time, has four skill levels, and the novice level bears about as much resemblance to Commander level as draughts bears to chess. Learning to play a good game at the top level takes months of effort.

Eastern Front 1941 — written by Atari's Chris Crawford, who also wrote Tanktics, Avalon Hill's Legionnaire and Atari's Scram — is a war game. You command the German armies fighting the Barbarossa campaign against the USSR. The graphics are impressive: the map is about 10 screens big and you can use the joystick to scroll over it in any direction: this is single-pixel scrolling.

The computer plays an extremely intelligent game, and the results can be incredibly accurate historically — the Russians always win. Unfortunately it takes about three hours to play, and there is no way of saving or loading a partial game.

If you like the arcade versions of Pac-Man and Missile Command then you will like the home versions. I found Asteroids somewhat disappointing, but then I also disliked the arcade version. Centipede, however, is certainly very addictive.

The game is simple. You have a bug-blaster at the bottom of the screen, and you kill centipedes — segment by segment — as they wind their way down the screen. Meanwhile you are obliged to avoid being hit by prancing spiders or bombed by frantic fleas, while simultaneously trying to pick off passing scorpions. All the play takes place in a field of mushrooms.

You get an extra bug-blaster and a neat tune for each 10,000 points you score, so in theory the game could last forever. In practice the action gets faster every 30,000 points, until by 120,000 everything is frantic, not only the fleas.

The sound is excellent. Each insect has its own little tune against a throbbing background noise that is even more compulsive than the arcade Space Invaders.

All the Atari games mentioned, except Eastern Front, are plug-in ROM versions. This means they are very quick and easy to load, and any Atari owner can play them. Eastern Front needs 16K and can be bought on cassette or disc. Star Raiders and Eastern Front are one-player games, while all the others can be played by two people in competition. All the games are joystick-operated, though Star Raiders also uses about half the keyboard.



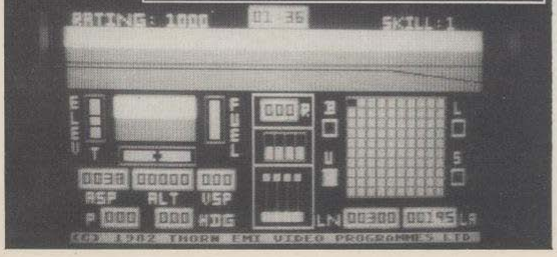

Frogger-variant Preppie's garden setting, right, seems a million miles from suburbia with no plastic gnomes and three lanes of man-eating lawnmowers. Jumbo Jet, below, is a complex flight simulator.

The independent games are necessarily in the number two position, and as such should try harder. Roklan's version of Midway's arcade game Gorf is a case in point. The graphics are recognisable as Gorf, and there are four different variations — invaders with force-field barrier, laser attack, space warp and mothership. But the pace is a little slower than the Atari version.

Airstrike from the English Software Company is a home version of the arcade game Scramble. It is hard to manoeuvre the joystick-operated needle-fighter across the tiny landscape of the home version. The rockets that take off as you fly by are very easy to dodge, you just accidentally run into walls all the time. Also, the bomb release is the space bar of the computer which presents problems as you need two hands to work the joystick. The graphics are not quite as good as some of the other arcade games tested.

Protector, from Synapse Software, is very similar in many ways, but much better. You fly a needle-fighter across a horizontally-scrolling landscape, but the action is much smoother and the graphics are better drawn. In Protector, you have to rescue people from a city, fly them to another city, and have laser fire to reach home base.

Meanwhile the enemy ship is also picking people up and dropping them into a volcano.

SURVEY

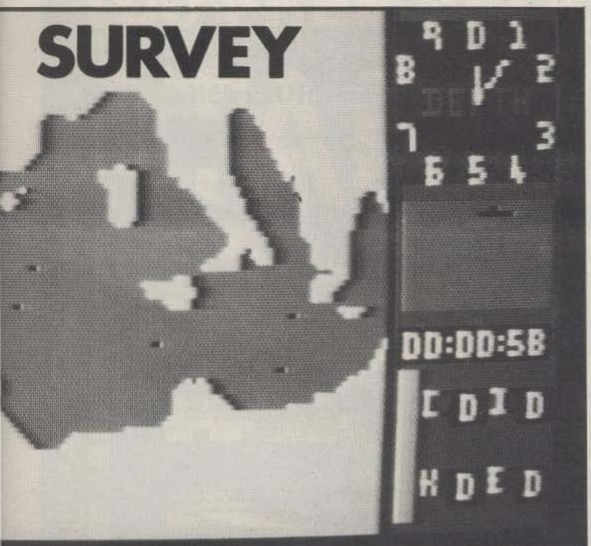

In Submarine Commander the Med is the theatre of war for your hunter-killer.

SOFTWARE

You have to race against time as the volcano eventually erupts and destroys the cities. Because of the graphics it is fun to play at first, but it lacks the speed of Centipede or the challenge of Star Raider.

Preppie from Adventure International — which produces the Scott Adams Adventure games for the Atari — is a Frogger-type arcade game. The graphics are smooth and colourful, and the sound is musically the best I have ever heard on the Atari.

The idea of Preppie is that, with a joystick, you control an American schoolboy picking up golf-balls. Instead of a highway you have to cross three lanes of lawnmowers and a three-lane river with boats, logs and alligators. The game is a great demonstration of the Atari's sound and graphics capabilities.

Bandits is an arcade game from Sirius Software, and requires 48K and a disc drive. That puts it beyond some Atari owners, which is a shame as it is an excellent game. This is not a home version of an actual arcade game, though the movement of the enemy raiders is very like that in Galaxian. Your role is to defend a lunar supply base against waves of a dozen enemies who swoop down, snatch fruit and carry it off to their own flying saucer. These enemies are not the usual Invaders but are like fruit flies, bees and so on.

Probably this game, by Tony and Benny Ngo, has been translated from an Apple version. On the title page you start with an Apple, then a bug flies up and munches it down to an Atari logo. The game is full of amusing touches like this, plus some fancy chequerboard graphics, but unfortunately these slow down the play.

Finally, I tried two discs from Broderbund software, who are justly famous for their Apple games. I was really looking forward to playing Choplifter but the disc refused to boot. Broderbund's Stellar Shuttle loaded, but after every read made a horrendous scrunch. It took a long time too. Frankly I thought Stellar Shuttle was poor — a sort of "Lunar Lander meets Asteroids" — and I shall be circumspect about Broderbund games, as long as they make this kind of racket. Presumably it has something to do with the software-protection routine.

Simulations are a fascinating area of computer games, and they have educational interest too. Just as pilots now learn to fly in simulators, perhaps we will all use this method of learning in the future.

Thorn-EMI's flight simulator Jumbo Jet, and simulation games Submarine commander and Soccer are all supplied on ROM packs so they are "plug in and go". Unfortunately they are not "plug in and play".

Jumbo Jet Pilot is a simulation rather than an game, and takes an extremely long time to play. The first time it took me nearly 25 minutes to taxi the plane on to the runway and take off, after which the "ground" came into view at 45° and I crashed. "Try again" appeared. Submarine Commander takes even longer.

The Jumbo Jet screen has an instrument panel with indicators to watch. Submarine Commander has slightly fewer, but the central area of screen offers three options: map, sonar and periscope views. Thus you can track a ship on the map, dive and home in using sonar, then nearly surface and watch your torpedoes strike home using the periscope. It is a real challenge.

With both games the action is slow, and requires a good deal of forethought. You have to consider your course carefully, because, for example, it takes a long time to put about a sub. It is an inherent problem with simulations — the more accurate they are, the less game-like. These are accurate.

One limitation is not inherent: the quality of the handbook. Both Jumbo Jet and Submarine Commander are harder to start playing then Star Raiders, and need top-quality instruction books like that one has. The Thorn-EMI efforts are inadequate. No doubt when you have played the games a few times the handbook becomes irrelevant, but in terms of helping you to start they do a very poor job indeed. It is a shame that what is obviously brilliant programming is let down in this way.

Game	Manufacturer	Medium	Number of players	Price
Star Raider	Atari	ROM	one	£28.95
Eastern Front (1941)	Atari (APX)	Cassette or disc	one	£21.95
Centipede	Atari	ROM	one or two	£28.95
Gorf	Rocklan	Disc or ROM	one or two	£26.95
Airstrike	English Software	Cassette or disc	one or two	£19.45
Protector	Synapse	Cassette or disc — 32K minimum	one or two	£20.80
Preppie	Adventure International	Cassette or disc — 24K for disc	one or two	£19.75
Bandits	Sirius	Disc — needs 48K	one	£23.95
Choplifter	Broderbund	Disc — needs 48K	one	£23.75
Stellar Shuttle	Broderbund	Cassette or disc — 32K for disc	one	£19.75
Jumbo Jet	Thorn-EMI	ROM	one	£34.95
Submarine Commander	Thorn-EMI	ROM	one	£34.95
Soccer	Thorn-EMI	ROM	one to four	£29.95

Atom International (U.K.) Ltd, 185/195 Ealing Road, Wembley, Middlesex HA0 4QU. Telephone: 01-900 0511. Thorn EMI Video Programmes Ltd, Thorn EMI House, Upper St Martin's Lane, London WC2H 9ED. Telephone: 01-836 2444. All programs available your local Atari software dealer, and from Silica Shop Ltd, 1-4 The Mews, Hatherley Road, Sidcup, Kent DA14 4DX. Telephone: 01-309 1111.

A + F SOFTWARE A + F

BBC 32K £8.00 PAINTER SPECTRUM 48K £7.00



VISIT OUR SHOWROOMS FOR A DEMONSTRATION





ATOM
Torpedo Run
Cylon Attack
Space Panic
Painter
Zodiac
Death Satellite
£6.90

SPECTRUM 48K
Painter
Frogger
£7.00

DRAGON
Deadwood £6.90

BBC
Model 'A'
Tower of Alos £6.90
Model 'B'
Tower of Alos £6.90
Planes
Painter
Pharoh's Tomb £8.00
Frogger

Price £8.00
New Release

PLANES

BBC 32K
Arcade Game

ATOM 'TOOLKIT' EPROM
22 Extra Commands and Five features including 1200 Band Cass. Operating System £18.50

ADD 4 or 6 EPROMS TO YOUR ATOM WITH OUR 'ADDA' BOARDS
6-Way 'Adda' board £28.75

5% DISCOUNT ON ALL SOFTWARE WITH THIS COUPON
(Quote '830/ 1' for discount on telephone orders)

NAME _____
ADDRESS _____

PLEASE SEND ME:

Please note prices include post & packing
You may also telephone (24 hrs) with credit card order

830 HYDE ROAD MANCHESTER M18 7JD
061-223 6206 (24 hrs) Telex 667461 (AHn A&F)

SINCLAIR SIRIUS SPECTRUM BBC DRAGON ATOM SINCLAIR SIRIUS SPECTRUM BBC DRAGON ATOM SINCLAIR SIRIUS SPECTRUM BBC DRAGON ATOM SINCLAIR SIRIUS SPECTRUM BBC DRAGON ATOM SINCLAIR SIRIUS SPECTRUM BBC DRAGON ATOM SINCLAIR SIRIUS SPECTRUM

100 FREE PROGRAMS

FROM SILICA SHOP — WITH EVERY PURCHASE OF AN

ATARI 400 800

ATARI

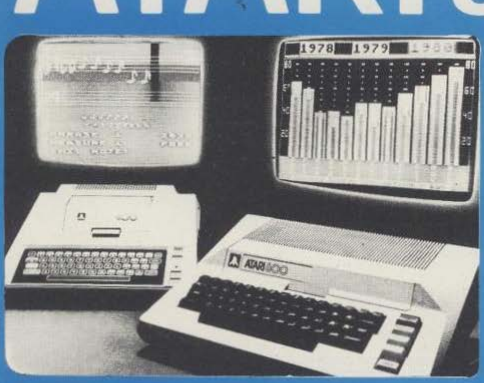

ATARI PRICES REDUCED

We at Silica Shop are pleased to announce some fantastic reductions in the prices of the Atari 400/800 personal computers. We believe that the Atari at its new price will become the U.K.'s most popular personal computer and have therefore set up the Silica Atari Users Club. This club already has a library of over 500 programs and with your purchase of a 400 or 800 computer we will give you the first 100 free of charge. There are also over 350 professionally written games and utility programs, some are listed below. Complete the reply coupon and we'll send you full details. Alternatively give us a ring on 01-301 1111 or 01-309 1111.

ATARI 400 with 16K £199

ATARI 400 with 32K £248

ATARI 800 with 16K £449

400/800 SOFTWARE & PERIPHERALS

Don't buy a T.V. game! Buy an Atari 400 personal computer and a game cartridge and that's all you'll need. Later on you can buy the Basic Programming cartridge (£35) and try your hand at programming using the easy to learn BASIC language. Or if you are interested in business applications, you can buy the Atari 800 + Disk Drive + Printer together with a selection of business packages.

Silica Shop have put together a full catalogue and price list giving details of all the peripherals as well as the extensive range of software that is now available for the Atari 400/800. The Atari is now one of the best supported personal computers. Send NOW for Silica Shop's catalogue and price list as well as details on our users club.

THE FOLLOWING IS JUST A SMALL SELECTION FROM THE RANGE OF ITEMS AVAILABLE:

ACCESSORIES
Cables
Cassettes
Diskettes
Joysticks
Le Stick - Joystick
Misc Supplies
Paddles

ADVENTURE INT
Scott Adams Adv
No 1 Adventureland
No 2 Pirate Adv
No 3 Mission Imp
No 4 Voodoo Cast
No 5 The Count
No 6 Strange Obdy
No 7 Mystery Fun
No 8 Pyramid of D
No 9 Ghost Town
No 10 Sav Island 1
No 11 Sav Island 2
No 12 Golden Voy
Angle Worms
Deflections
Galactic Empire
Galactic Trader
Lunar Lander
Mountain Shoot
Rearguard
Star Flite
Sundav Golf

AUTOMATED SIMULATIONS
Crush Crumble Cmp
Datastones of Ryn
Dragons Eye
Invasion Orion
Rescue at Rigel
Ricochet
Star Warrior
Temple of Apshai
Upper Reaches Aps

BOOKS
Basic Ref Manual
Compute Atari DOS
Compute Bk Atari
Compute Magazine
De Re Atari
DOS Utilities List
DOS2 Manual
Misc Atari Books
Op System Listing
Wiley Manual

BUSINESS
Calculator
Database Managemt
Decision Maker
Graph-It
Invoicing
Librarian
Mort & Loan Anal
Nominal Ledger
Payroll
Personal Fin Mgmt
Purchase Ledger
Sales Ledger
Statistics 1
Stock Control
Telelink 1
Visicalc
Weekly Planner
Word Processor

CRYSTALWARE
Beneath The Pyram
Fantasyland 2041
Galactic Quest
House Of Usher
Sands Of Mars
Waterloo
World War III

DYNACOMP
Alpha Fighter
Chompeio
Crystals
Forter Fire
Intruder Alert
Monarch
Moonprobe
Moving Maze
Nominoes Jigsaw
Rings of The Emp
Space Tilt
Space Trap
Stud Poker
Triple Blockade

EDUCATION from APX
Algebric
Atlas of Canada
Cubbyholes
Elementary Biology
Frogmaster
Hickory Dickory
Inst Compto Dsm
Lemonade
Letterman
Mapware
Maths-Tac-Toe
Matrix & Prob Solvg
Mugwump
Music Terms/Notatn
Musical Computer
My First Alphabet
Number Blast
Polycalc
Presidents Of U.S.
Quiz Master
Starware
Stereo 3D Graphics
Three R Math Sys
Video Math Flash
Wordmaker

EDUCATION from ATARI
Conv French
Conv German
Conv Italian
Conv Spanish
Energy Czar
European C & Capls
Hangman
Invit To Prog 1/2/3
Kingdom
Music Composer
Scram
States & Capitals
Touch Typing

EMI SOFTWARE
British Heritage
Cribbage/Dominoes
Darts
European Scene Jig
Hickory Dickory
Humpty Dumpty
Jumbo Jet Lander
Snooker & Billiards
Submarine Commdr
Super Cubes & Tilt
Tournament Pool

ENTERTAINMENT from APX
Alien Egg
Airstrikt
Attank
Avalanche
Babel
Blackjack Casino
Block Buster
Block 'Em
Bumper Pool
Castle
Centurion
Checker King
Chinese Puzzle
Codecracker
Comedy Diskette
Dice Poker
Dog Daze
Domination
Downhill
Eastern Front
Galahad & Holy Grl
Graphics/Sound
Jax-O
Jukebox
Lookahead
Memory Match
Midas Touch
Minotaur
Outlaw/Howitzer
Preschool Games
Pro Bowling
Pushover
Rabbitrot
Reversi II
Salmon Run
747 Landing Simul
Seven Card Stud
Sleazy Adventure
Solitaire
Space Chase
Space Trek
Sultans Palace
Tact Trek
Terry
Wizards Gold
Wizards Revenge

ENTERTAINMENT from ATARI
Asteroids
Basketball
Blackjack
Centipede
Chess
Entertainment Kit
Missile Command
Pac Man
Space Invaders
Star Raiders
Super Breakout
Video Easel

ON LINE SYSTEMS
Crossfire
Frogger
Jawbreaker
Mission Asteroid
Mouskattack
Threshold
Ulysses/Golden Fl
Wizard & Princess

PERIPHERALS
Centronics Printers
Disk Drive
Epson Printers
Program Recorder
RS232 Interface
Thermal Printer
16K Memory RAM
32K Memory RAM

PERSONAL INT from APX
Atari Music System
Banner Generator
Blackjack Tutor
Going To The Dogs
Keyboard Organ
Morse Code Tutor
Personal Fitness Prg
Player Piano
Sketchpad

PROGRAMMING AIDS from Atari
Assembler Editor
Diamblier (APX)
Microsoft Basic
Pascal (APX)
Pilot (Consumer)
Pilot (Educator)
Programming Kit

SANTA CRUZ
Basics of Animation
Bobs Business
Display Lists
Graphics Machine
Kids 1 & 2
Horizontal Scrolling
Master Memory Map
Mini Word Processor
Page Flipping
Player Missile Gr
Player Piano
Sounds
Vertical Scrolling

SILICA CLUB
Over 500 programs write for details

FOR FREE BROCHURES – TEL: 01-301 1111

For free brochures and reviews on our range of electronic products, please telephone 01-301 1111 (or dial by telephone our quick-ringer number, 01-309 1111 — ringing 6 times only) or write to us at our address below. We are open for business Monday to Saturday 9am to 5.30pm (closing Thursday 1pm inclusive).

- ADVICE — we are a specialist mail order company and are able to supply goods direct to your door.
- STOCKS — we stock the goods we offer — if you are totally unsatisfied with your purchase, you may return it to us within 10 days for refund of the goods, in satisfactory condition as we will give you a full refund.
- PART EXCHANGE SECOND HAND MACHINES — we offer a part exchange scheme to trade in many makes of TV game for personal computers.
- SERVICE — we have our own in house service department. Unlike many competitive firms we have immediate unexpired and all normally match any lower price quoted by our competitors.
- REVIEWS — we have available on the suitability of various computers.
- ATARI SPARES — available on all computers out of guarantee.
- LATEST ATARI — we are always up to date with the latest.
- CREDIT FACILITIES — we offer credit over 12 (24) 36 months, please ask for details.

SILICA SHOP LIMITED
Dept. YC0283, 1-4 The Mews, Hatherley Road, Sidcup, Kent DA14 4DX. Telephone 01-301 1111 or 01-309 1111

SILICA SHOP

FREE LITERATURE

I am interested in purchasing an Atari 400/800 computer and would like to receive copies of your brochures and test reports as well as your price list covering all of the available Hardware and Software:

Name .....

Address .....

.....

.....

Postcode .....

YC0283 — Your Computer — February 1983

HOW TO GROW UP TO A REAL COMPUTER

5th ZX MICROFAIR
SEE US AT STAND 101
NEW HORTICULTURAL HALL, LONDON SW1

If you're enthusiastic about microcomputing, sooner or later you'll ask yourself the question . . . "where do I go from here?"

This is particularly true if you own a micro with limited expansion and hardware peripheral options . . . like the ZX81.

Now your question can be answered in three short words:

BASICARE MICRO SYSTEMS

BASICARE are the inventors, developers and manufacturers of a totally unique microcomputing upgrade system.

It's the sort of system others have dreamed about . . . a series of separate modules that perform a whole range of microcomputing functions that simply (and firmly) stack together.

How BASICARE build into a complete computing package.

If you're confused . . . don't be . . . you only have to think of it in terms of the way Hi-Fi equipment has evolved.

You buy the hardware you want and add to the system! Each module may have a separate function or integrate functions. And when you want more . . . you add more!

In short you can develop a whole range of hardware options that fit together to form a complete package . . . "Computing" in the real sense of the word!

And what a package!

Apart from it's good looks and stability under working conditions, BASICARE MICRO SYSTEMS offers a fantastic range of micro options for ZX81 users.

Of course, such a system needs a starting point from which to expand. The heart of BASICARE'S system is a unique computer interface which we call PERSONA.

This one unit simply plugs into your ZX81 without modification and acts as the "brains" of the whole operation.

Thereafter you choose how you want to expand your micro by simply plugging-in more modules.

Look at the choice you have:

PERSONA – An interface module to enable an ORGANIC MICRO to grow on the ZX81.
MINIMAP – A memory mapping device to extend the address space of the ZX81 from 64K bytes to 1 M bytes.
RAM 08 – A low cost, low power memory expandable from 2K to 8K.
RAM 16 – 16K Add on memory at remarkably low cost.
RAM 64 – A TRUE 64K Add on memory.
DROM – Ultra low power memory backed by rechargeable battery for non-volatile storage of programs and data.
TOOLKIT – A module fully socketed to take up to 8K bytes of utilities in EPROM/ROM.
PERICON a – A general purpose, user programmable device providing 24 lines of input/output.
PERICON b – 24 lines of heavy duty output to access and control the outside world.
PERICON c – A module to drive 80 column printer with Centronics type parallel interface.
USERFONT option – User definable characters available for RAM 08, DROM and TOOLKIT.

Of course, there's lots more BASICARE Modules under development including joysticks, EPROM Programmer, Floppy Disc Controller and much more.

BASICARE is the sort of system that GROWS when you grow . . . and remember, when you change your micro, you will be able to change to a PERSONA unit to suit your new equipment!

In short, BASICARE will serve you forever . . . no matter how big you want to grow!

"As space is limited to describe BASICARE products, we have produced a fully documented brochure . . . send for it today (enclosing stamp please).

BASICARE MICRO SYSTEMS are available by mail simply by sending today together with cheques/PO./Access or Barclaycard No. Please indicate clearly your exact requirements.

Name.....

Address.....

PERSONA	@ £30.25	DROM(2K)	@ £39.50
MINIMAP	@ £35.95	TOOLKIT	@ £22.20
RAM8 (2K)	@ £24.50	PERICON A	@ £27.90
RAM16	@ £26.75	PERICON B	@ £33.75
RAM64	@ £76.25	PERICON C	@ £41.75

Options: USERFONT @ £8.00,
Add. 2K for RAM8 @ **£6.50,** Add. 2K for DROM @ **£7.50**

All prices include VAT, postage and packing in the U.K. (Overseas allow at least 15% for surface mail).
Post today to: BASICARE MICROSYSTEMS LTD., Dept Y2
5 Dryden Court, London SE11 4NH or Phone: 01-735 6408

BASICARE MICRO SYSTEM

Step into the unknown

fast action, arcade style games, fantasy and sci-fi, plus exciting technology in program aids & hardware/software combinations

ZX81 16K

Krazy Kong £3.95

All machine code version of the popular arcade game. This program has all the features of the original and is every bit as fast.

Ghost Hunt 3.95

Gobble you way through a Maze- Ghosts, power pills etc etc. very fast.

Maze Drag Race 3.95

Drive through a giant maze 9 times the size of the screen picking up points as you go – but watch out for the other cars, rocks oil & ice. A really

Alien 3.95

Set on board the spaceship Nostrodamus, can you choose the right weapon to repel the alien before he kills your crew?

DCoder 5.95

Essentially a disassembler for your machine code but with one important difference – it will relocate the code in whole or part to any other part of memory.

Zonix 12.95

Sound effects for your ZX81 are now available at a price you can afford! Zonix is a hardware/software combination that allows you to write programs with real impact. The software includes two programs:

a) A program set to produce bombs, missiles, fire engines, tunes, telephones and sirens. Also includes the facility to make your own.

b) A program that turns your ZX81 into an electronic organ.

The hardware is an amplifier with volume control and loudspeaker which simply plugs into the mic socket of your ZX81. The sounds can be actuated from within your programs with a simple command. They can also be of various lengths so the limit is only your own imagination.

MCoder £7.95

This truly amazing program is the most flexible compiler available for the ZX81 AND NOW THE SPECTRUM TOO!.

MCoder will instantly translate your slow basic programs into super fast machine code at the touch of a key. It is also extremely easy to use: just load MCoder (the ZX81 version is just 2K long, the spectrum versions 3K) and then write your basic program as normal or you can load a basic program from tape to save you retyping the whole thing. MCoder then allows you to run and debug the basic until it is fault free. Now you can bring MCoder into operation using a print USR command – the basic will then be compiled into machine code as you watch!.

On average MCoder will increase the speed of basic programs 75 times. Both the ZX81 and the spectrum version will handle 95% of all basic commands and is quite simply the best compiler on the market. state 16K or 48K when ordering spectrum MCoder.

DRAGON 32K

Dragbug 9.95

Dragbug is a powerful machine code monitor plus a full disassembler for your Dragon 32. An essential software tool for writing, debugging and running your machine code programs or machine code subroutines to be called from basic.

Star Trek 7.95

An intergalactic adventure in full sound and color. As captain of the SS Enterprise your mission is to defend the empire from the invading Klingons. Features include battle computer, phasors, photon torpedoes, scanners etc etc. Nine levels of Play

Attack 7.95

If you've ever played defender or scramble just wait till you play Attack! Incredibly fast !!!

Dataplan 11.95

A superb business or home use filing & reporting system. Flexibility is its strength making it usable in place of any card index application. Features include sort, search, list, delete, change, save, file etc.

Textstar 11.95

Not only can Word Textstar function as a complete word processor but includes comprehensive editor routines that make writing and debugging programs as simple as A.B.C.

QSave £15.95

MANY THOUSANDS OF SATISFIED CUSTOMERS NOW HAVE A HIGHLY RELIABLE LOADING SYSTEM WHICH OPERATES 16 TIMES FASTER THAN THE SINCLAIR SYSTEM'

The news is that QSAVE has been improved for '83

This is what you get:

1. A cassette interface to improve the signal quality (essential if a high speed loader is to be reliable) which will also improve the loading of your programs. The interface plugs into your ZX81 using the leads supplied and has been improved to incorporate: AN AUTOMATIC LEVEL CONTROL.....AN OVERLOAD WARNING LIGHT....A SAVE/LOAD SWITCH (no unplugging of mic or earphone leads)....AN ON/OFF SWITCH (which doubles as a Reset switch). With these features loading is highly reliable (programs will still load with a volume setting as LOW as ¼).

2. Highly sophisticated software which will load and Save programs at 16 times their normal speed (i.e. 8K in 10 secs; 48K in 110 secs). Programs can be named to allow a superfast file search through a tape. It works equally well with autorun programs, Basic or machine code.

A **TRUE** verify feature is also provided – this allows you to verify that a 'SAVE'd program has 'SAVE'd properly **BEFORE** turning off the power and finding all is lost. QSAVE will operate with **ANY** memory, on **ANY** program length **AND** with your existing programs. **All the above is contained in ½K of superbly easy to use Software.**

PSS
PERSONAL SOFTWARE SERVICES

SEND CHEQUE OR P.O. TO: P.S.S. 452 STONEY STANTON ROAD, COVENTRY CV6 5DG.

SPECTRUM

Although nowhere near as profuse as Spectrum software, various add-ons have now appeared to bridge the gaps in the micro's specification. Tim Langdell reviews.

IT IS ALMOST a truism to say the Spectrum has been pushed to its limits. A great deal of time has been devoted by software houses to creating programs that put more sophisticated machines with less well-thought-out software to shame. Nevertheless, there is scope for peripherals which even up some of the Spectrum's primary hardware inadequacies.

Under control

Following up its success with a controller —that is, a device which allows you to switch between Loading and Saving, disconnecting the computer when saving and vice versa — Abacus has introduced one for the Spectrum. This means more reliable Saving and Loading. Unlike the ZX-81 version, the Spectrum controller also includes an amplifier, a particularly useful feature in view of the Spectrum's own weakness in amplification. Setting up the controller simply requires plugging the Spectrum's power supply into the side of the Abacus box and the power lead from the box into the back of the Spectrum. The Mic and Amp leads are used to connect the Spectrum to the tape recorder.

Kempston's joystick is a standard design with fire button and control stick working on a switching rather than analogue base.

This means that it can be used to simulate the detection of keypresses. The joystick is mapped to Port 31 of the Spectrum, and can be accessed with the In command.

The value returned by detecting Port 31 in this manner can be between 0 and 26 with the eight directions from forward through NE to E, SE, S and so on being values 1 to 10 — omitting 3 and 7 — and the fire button returning 16. The joystick can be read in machine code too for a faster response and arcade-like action.

The joystick's connector is a small black plastic box with two matt-black TTL chips visible on the outside which plugs straight in to the Spectrum's printed-circuit board. The joystick itself is very responsive. My only quibble is that a spring-back-to-centre mechanism would make the central off position easier to reach when playing fast arcade games. The joystick costs £19.50.

This company has also brought out one of the first 24-line I/O ports for the Spectrum. Simply constructed — a single TTL chip supports the operation of the 8255 PPI chip — the board comes with clear documentation which indicates how one can use the three 16-pin dual in-line sockets or a 24-way edge-connector attached to the back of the printed-circuit board. The 8255 chip has several modes of operation: the three I/O ports can be configured in the following ways — setting up one bank as inputs, another as outputs, with the option of "handshaking" on port C.

Using the In and Out commands the port can be accessed from both Basic and machine code. Apart from the back-to-back edge connector the port can be limited to the Spectrum with a stackable edge-connector, or a motherboard. The stackable edge-connector allows an extra device to be attached to the Micro whilst the PPI is attached. The motherboard will take two cards in edge-connector sockets as well as a Printer or a Microdrive. The motherboard is supplied with its own 5V regulator.

The 24-line PPI has been configured in the Spectrum's I/O map so that it will not clash with the Printer Microdrive or RS-232 interface. The PPI costs £16.50, the stackable connector is £5.50, and the two-slot mother board is £16.95.

Add ZX-81 hardware

There are three Adam adaptors for the Spectrum; each allows you to add ZX-81 hardware on to your machine. The fundamental adaptor provides a ZX-81-compatible output port at the rear of the Spectrum, but no address conversions. The adaptor comes with a computer printout description which tells you how to attach memory-mapped devices which do not decode the lower five address

Kempston Electronics motherboard and back-to-back edge-connector.

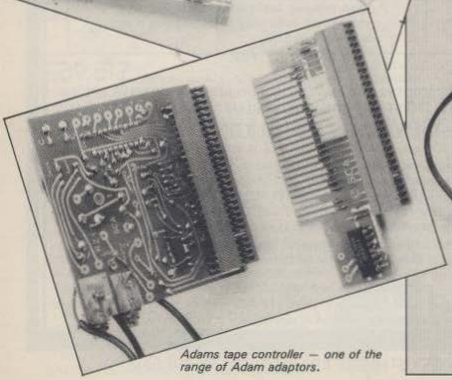

Adams tape controller — one of the range of Adam adaptors.

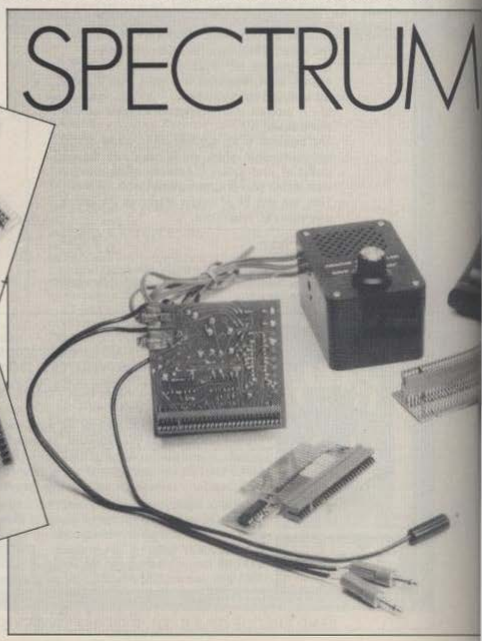

lines in the I/O map. The next adaptor — the Adam II adaptor — allows the simultaneous use of two sets of peripherals on the rear of a 16K Spectrum. This adaptor allows you to attach a ZX-81 16K RAMpack to a 16K Spectrum.

The Adam II adaptor can interface with any ZX-81 peripheral which was designed to work in the 0 to 16K region of the ZX-81's memory map, by using it in the 48K to 64K region of the Spectrum's map. Thus ZX-81 equipment will require 49152 to be added to its addressing, and for this reason EPROMs designed to work on the ZX-81 will probably not work on the Spectrum.

Finally, there is the more adventurous Eve adaptor, for those with a 48K Spectrum. With a 48K Spectrum all 64K of the address lines on the Z-80A CPU are already accounted for — 16K ROM and 48K RAM — hence adding any device mapped in the RAM area seems impossible; especially as Sinclair did not provide a RAMCS line at the rear which would have allowed us to turn off some, or all, of the internal RAM. By adding this adaptor and making a few soldering connections inside your Spectrum you can turn off 8K of the upper 32K of RAM and map devices into this area. Of course, making the alteration could invalidate your guarantee.

The RZ-1 Tape Controller is another more recent device from Stephen Adams. It provides both Spectrum and ZX-81 owners with a programmable tape control unit for stopping and starting the cassette motor under software control, or disconnecting the load lead when Saving and vice versa. The RZ-1 plugs in via an edgeconnector. The rear connector of the machine is duplicated behind the RZ-1, so a peripheral unit can still be attached. The RZ-1 can control two tape recorders and provide a minimum of five latched outputs for controlling external devices.

Furthermore, it does not use any memory locations, either in RAM or in the I/O map. The unit is located in ROM space between 512 and 1024. Poking various locations in this region allows you to turn on any of the tape motors, or to provide an output to one of the ports.

Upgrade range

East London Robotics provides a range of RAM upgrades for the Spectrum: the SP-48A which adds a further 32K of RAM to the 16K Pectrum Series 1 on a plug-in board; the S048 for the current Series 2 version of the Spectrum and an SP-80 RAM add-on which gives not only 32K of extra memory but another 32K which can be accessed as well, using Out commands. It is thus possible to use a full 80K of user RAM with this board.

East London Robotics' Slowloader allows you to load ZX-81 programs into a ZX Spectrum.

The Slowloader adapts itself upon loading to whichever type of Spectrum is in use.

CONCLUSIONS

- Perhaps if Sinclair had put a little more thought into primary design, devices like the Abacus controller probably would not be necessary. Its boost to the Spectrum's amplification is useful, as is the capability to switch it off when the keyboard bleeper gets on your nerves.
- Once Kempston's joystick is fitted, nothing else can be added to the connector. But what sort of peripheral would you use in conjunction with a joystick? By putting a stackable connector between the Spectrum and the stick's connector one could test the joystick with the supplied demonstration program.
- The Adam adaptors are extremely useful, but consider whether or not you really want to make hardware alterations.
- The Adams tape controller is effectively transparent to the Spectrum or ZX-81, since it does not use any memory location either in RAM or in the I/O map. The relays involved can cope with 1A at 28V dc or 100V ac. They are sufficiently heavy-duty for many purposes like controlling model train layouts. ■

ADD-ONS

The Abacus controller includes an amplifier.

The Kempston joystick.

16K BUDGET PAK

JRS 16K RAM **AND** FREE ALIEN ATTACK **plus** either BATTLESHIPS **or** GAMES TAPE II

SAVE £8.65! Total package price only £27.75



64K BUDGET PAK

JRS 64K RAM **AND** FREE ALIEN ATTACK **plus** either LOST ISLAND **or** BATTLESHIPS

SAVE £7.95! Total package price only £64.90

JRS SOFTWARE

19 WAYSIDE AVENUE, WORTHING, SUSSEX. BN13 3JU Telephone: (0903) 65691

ZX81

Hardware

Econotech 16K RAM (uncased)	Only £20.95
JRS 16K RAM	Only £26.50
JRS 64K RAM	Only £62.95

Software

Programmers Toolkit (16K)	Only £4.95
Graphics Toolkit (16K)	Only £5.95
Lost Island (16K)	Only £4.95
Games Tape II (16K)	Only £4.95
Battleships (16K)	Only £4.95

SPECTRUM

A full range of software and hardware are available. Tick the coupon below for your free 1983 catalogue and enclose a large stamped addressed envelope.

I wish to order the following:

☐ 16K Budget Pak with Battleships	Only £27.75
☐ 16K Budget Pak with Games Tape II	Only £27.75
☐ 64K Budget Pak with Lost Island	Only £64.90
☐ 64K Budget Pak with Battleships	Only £64.90
☐ Econotech 16K RAM	Only £20.95
☐ JRS 16K RAM	Only £26.50
☐ JRS 64K RAM	Only £62.95
☐ Programmers Toolkit (16K)	Only £4.95
☐ Graphics Toolkit (16K)	Only £5.95
☐ Lost Island (16K)	Only £4.95
☐ Games Tape II (16K)	Only £4.95
☐ Battleships (16K)	Only £4.95
☐ 1983 JRS Catalogue	Free
Tick as applicable Total (Including VAT & P&P)	

Name ..... Age .....

Address .....

Post to: JRS SOFTWARE, Department YC
19 Wayside Avenue, Worthing, Sussex BN13 3JU
YC2

PRINT OUT

"Life would be so much easier with an Amber 2400 Matrix Printer....."

AMBER 2400

MATRIX PRINTER

LOW RUNNING COST USING PLAIN PAPER
USED WITH MANY COMPUTERS INCLUDING BBC, UK101, ATOM DRAGON, NEWBRAIN, ATARI, TRS-80, VIC-20 AND MZ-80K

£ 78

+VAT & £2.95 P&P
Or for details send a large SAE to:

AMBER CONTROLS LIMITED
Central Way
Walworth Industrial Est.
Andover
Hampshire SP10 5AL

MICRO POWER GIVE A GREAT DEAL MORE

** SPACIOUS SHOWROOM OPEN MON. to SAT.
*FRIENDLY AND HELPFUL STAFF
*EXPERT ASSISTANCE ALWAYS ON HAND
*GOOD RANGE OF COMPUTER BOOKS
*AFTER SALES TECHNICAL BACK-UP and SUPPORT

BBC MICRO	
Model A	£325.00
Model A (32K)	£349.00
Model B	£399.00
Memory Upgrade	£25.00
Full Upgrade	£75.00
Joysticks (pair)	£13.00
Single Disk Drive	£265.00
Disk Interface (fitted)	£119.00
14 inch Colour Monitor	£309.00
20 inch Colour Monitor	£343.85
ACORNSOFT PROGRAMS (phone for availability)	
ACORN ATOM	
Single Disk Drive (incl. FREE buffer kit)	£343.85
ATOMCALC ROM	£39.10
WORK PROCESSOR ROM	£29.90
FLOATING POINT ROM	£23.00
ROM Selector Board	£22.40
BBC BASIC Board	£49.95
Programmer's TOOLBOX	£20.10
SUPER TOOLBOX	£16.60
M/C CODE MONITOR/DISASSEMBLER	£16.60
PRINTERS	
EPSON MX80 F/T III	£399.00
EPSON MX80 T III	£349.00
STAR DP 8480	£279.00
SEIKOSHA GP 100A	£229.00
Printer Leads (BBC/ATOM/DRAGON)	£15.50
BOOKS	
Assembly Language Programming for the BBC Micro	£8.95
BBC Micro – Instant Machine Code	£7.95
BBC Micro Revealed	£7.95
Basic Programming on the BBC Micro	£5.95
Let Your BBC Micro Teach You To Program	£6.45
NEC '30 Hour BASIC'	£5.95
Practical Programs for the BBC Micro and Acorn Atom	£5.95
Getting Acquainted with your Acorn Atom	£6.45
39 Tested Programs for the Acorn Atom	£6.45
Atom Magic Book	£5.50

NEW *FROM MICRO POWER*

DRAGON 32

THE FAMILY COMPUTER TO FIRE YOUR IMAGINATION

Easy to Learn! Easy to Use!
Colourful! Graphic! Musical!
Well-made and Designed to Grow!

KEY FEATURES

** 32K RAM as Standard, Expandable to 64K
** Display:
9 colours available.
5 different resolutions from 16 x 32 to 256 x 192.
** Extended MICROSOFT Colour Basic as Standard.
Advanced graphics commands – set, line, draw, circle, paint, print using:
Advanced Sound
Full Editing – insert, delete, amend.
** Professional Typewriter Keyboard (Guaranteed for 20 million key depressions).
** FREE 160 page 'BASIC' training manual.
** Simple 'plug-in' Connections for Joysticks, Printer, Games, Cartridges and 'auto-controlled' cassette.
** Software on Cartridge and Cassette already available (send for details).

PRICE ONLY £199.50 incl. V.A.T.

All prices inclusive of V.A.T

THINK DRAGON !!
THINK MICRO POWER!!

Carriage FREE on cash/cheque orders over £100

MICRO POWER LTD.
Dept. YC2
8/8a REGENT STREET,
CHAPEL ALLERTON,
LEEDS LS7 4PE.
Tel: (0532) 683186

WITH THE GROWING number of video inverters on the market for the ZX-81, I thought it was about time some games were written for use with one.

"Deep Space" is mostly in Basic with four short machine-code routines to animate the display.

A galactic megatrawler is cruising through the computer-generated universe eating stars. Black holes, white dwarfs, and anti-matter are already in the program but as it is in Basic, you can add your own pet horrors at will.

Attacks by alien craft are frequent, although escape from these is possible by engaging "hyperdrive" to re-materialise in a fresh — and unknown — universe. The game can develop in different ways depending on whether you prefer to stay and fight or run and hide.

It will, of course, run perfectly well on any 16K ZX-81 but the display loses a deal of its visual effect. Hints are given later for a suggested improvement if you wish to try.

Type in Fast mode a Rem statement consisting of 97 characters as line 1, and the machine-code loader as in program 3. Now Run this and Enter the hex code from table 1, one pair at a time. When you reach the end enter S to stop the program, and List it. The last word in line 1 should be Tan. If it is not, then you have made an error and will have to start again.

Now enter Poke 16510,0 as a direct command and line 1 should become line 0. This is to prevent the Rem from being edited. If you attempt to Edit you will loose some of the code as it contains unseen bytes.

Next add the Basic in program 2 to overwrite program 1 and type in as a direct command Poke 16580,201. Run the program in Slow mode to test your machine code.

The screen should fill immediately with stars. Check for a report code. If it is a 5 then your code contains an error in addresses 16514 to 16528. If it prints something else, 16521 is wrong.

Pressing 6 should clear the screen from the bottom up. Stop before it reaches the top of the screen and press 7. The screen should refill downwards. Break the program and Poke 16580,0. Running it again should give you a display which gets narrower as you Scroll up and down. If it does, all is well. A quick press on the 0 key and the screen should invert. If all is working well, delete lines 2 to 8 and enter the main listing, after first saving to tape.

The variables are as follows:

S	High score
A	Shield strength
B	Game score
C and G	Initial numbers of stars and white dwarfs in each line of the display
D and E	Define the position of your ship
P	Top left-hand corner of the screen — all other points on the display are calculated from this
W	Initially a white dwarf, changed under attack to an alien spacecraft
T	Part of the random number multiplier. Reduce this to 1000 to make attacks come faster
F	Your current position on the screen
H	Denotes attacks and black holes
M	Defines the first print position in the line in which the stars need to be reprinted after scrolling
N	Adjust the unprinting position of your ship which will no longer be in line 12 after a scroll

V, X, Y and Z are used to call the various machine-code routines and have no particular significance themselves. V is the title page background X and Y are the scrolls up and down and Z inverts the display file.

Lines 45-70 print the initial universe and line 72 tests to see whether or not it is composed of anti-matter and sends you the "End of game" routine at line 450 if it is. The main loop starts at line 80. If you are altering the game, keep this loop as short as possible or you will slow things down unnecessarily.

Lines 85-87	Check whether a star, dwarf or alien has been encountered and send you the appropriate sub routine.
Line 90	Random-number generator.
Line 110	Steers your spacecraft horizontally.
Lines 120-121	Take you out of the loop to scroll in either direction.
Line 122	Sends you to the subroutine at line 600 to make a hyperspace jump.
Line 130	Returns you to the start of the loop.
Lines 140-153	Print the correct numbers of starts after using the scroll routines at 300 or 400. Both these work in the same way with 300 scrolling down and 400 scrolling up.
Lines 460-470	Restore your shields to full power and increment your score by 10 if you manage to catch an alien.
Line 500	Checks the random number multiplier to see if you are being attacked.
Line 520	Switches to attack mode.
Line 529	Checks for a direct hit.
Line 550	Pokes the alien ships.
Lines 560-570	Adjust and check your shields.
Lines 600-620	Produce the white dwarf crash whilst
Lines 701-708	Make the stars sparkle as they are eaten.

When you have finished entering everything, type in Goto 1000 and Save to tape. The game should auto-start and greet you with the title page.

It looks rather a lot to type, but lines 1000-2029 contain an animated title routine printed in Basic but operated by the machine

ZX-81 DE

Hex code. Table 1 — 97 bytes.

FD	36	22	00	06	C0
3E	07	D7	D7	D7	D7
10	FA	C9			
2A	0C	40	54	5D	01
21	00	00	00	00	09
01	F7	02	ED	B0	2A
0C	40	01	17	03	09
06	20	AF	77	2B	10
FC	C9				
2A	0C	40	01	F6	02
09	E5	01	21	00	09
EB	E1	01	F7	02	ED
B8	00				
2A	0C	40	06	20	AF
23	77	10	FC	C9	
06	18	2A	0C	40	23
7E	FE	76	28	05	C6
80	77	18	F5	10	F3 C9

Hex code. Table 2 — 96 bytes.

FD	36	22	00	06	C0
3E	17	D7	D7	D7	D7
10	FA	C9			
2A	0C	40	54	5D	01
21	00	09	01	F7	02
ED	B0	2A	0C	40	01
17	03	09	06	20	3E
80	77	2B	10	FC	C9
2A	0C	40	01	F6	02
09	E5	01	21	00	09
EB	E1	01	F7	02	ED
B8	00				
2A	0C	40	06	20	3E
80	23	77	10	FC	C9
06	18	2A	0C	40	23
7E	FE	76	28	05	C6
80	77	18	F5	10	F3 C9

Program 2.

```
   0 REM (MACHINE CODE)
   1 RAND USR 16514
   2 IF INKEY$="6" THEN LET X=US
R 16529
   3 IF INKEY$="7" THEN LET Y=US
R 16561
   4 IF INKEY$="0" THEN LET Z=US
R 16592
   5 GOTO 2
```

Main listing.

```
   0 REM CLEAR 06 ."""Y÷NOT NOT N
OT NOT ( IF TAN EERND??* 5 EERND
" RUN " GOSUB EERND" ÷ 4?F( U
NPLOT TAN EERND" PLOT " FAST " S
 FOR LPRINT " RUN " GOSUB E
RND"4?7?( UNPLOT TAN "/EERND?? /
 PRINT ( NEXT TAN
   1 REM "DEEP SPACE" BY A.C.SPR
IDDELL
   9 LET S=0
  10 LET A=0
  11 LET B=0
  12 LET G=1
  13 LET C=2
  14 LET N=12
  15 LET E=15
  16 LET D=15
  25 LET P=PEEK 16396÷256÷PEEK 1
6397+1
```

code to give the game a more finished appearance — well worth the effort involved.

If you want to alter the initial title page or instruction routine do ensure that you return the machine code to Game Scroll by Poking 16580,0 otherwise you will have columns of stars printed each time you move upwards.

As you play the game you will find that you are much more likely to be attacked in a heavily-populated universe than in a dead one, and that there are universes in which you stand a good chance of catching alien ships and building a high score.

If you do not have a video inverter, the display can be greatly improved by using the machine code from table 2. You will now need only 96 characters in line 1 as the code in table 1 has some NOP bytes which are not used but have been left in for historic reasons.

Add line 41 to the main listing:

```
41 LET Z=USR 16591
```

Note that the addresses called are now as follows:

X = 16529
Y = 16559
Z = 16591

and lines 1035 and 1075 should read:

POKE 16578,201 and

POKE 16578,0 respectively.

All printing should be inverted including the spaces and all Poked characters must also be inverted by adding 128 to their numbers. The exception to this is 133 in lines 87 and 550 as this is already an inverse character. For example: line 40 which prints white dwarfs now becomes: LET W=155

and in lines 62, 85, 152 and 705 the 23 is changed to 151.

If you are not sure whether or not you have changed all the characters, run the program and press the break key whenever an incorrect one is printed. This will give you the line number which you need to alter.

GAMES

Stars and planets may be standard fare for your megatrawler, but black holes, white dwarfs and anti-matter will give you indigestion on a cosmic scale in Adrian Priddell's ZX-81 game.

EP SPACE

```
 40 LET U=27
 45 FOR J=0 TO 23
 50 FOR K=1 TO G
 51 POKE P+33*J+INT (RND*30+1),
U
 52 NEXT K
 60 IF C=0 THEN GOTO 70
 61 FOR K=1 TO C
 62 POKE P+33*J+INT (RND*32),23
 63 NEXT K
 70 NEXT J
 71 SLOW
 72 IF C=3 AND G=3 THEN GOTO 45
0
 75 LET T=2000
 80 LET F=(D+P+396)
 85 IF PEEK F=23 THEN GOSUB 700
 86 IF PEEK F=27 THEN GOSUB 600
 87 IF PEEK F=133 THEN GOSUB 46
0
 90 LET H=INT ((RND*T)/(C+1))
 91 IF H=40 THEN GOTO 240
 92 IF H<=5 THEN GOSUB 500
100 PRINT AT N,E;" ";AT 12,D;"O
"
101 LET N=12
105 LET E=D
110 LET D=D+(INKEY$="8" AND D<3
1)-(INKEY$="5" AND D>0)
120 IF INKEY$="7" THEN GOTO 300
121 IF INKEY$="6" THEN GOTO 400
122 IF INKEY$="H" THEN GOTO 800
130 GOTO 80
140 FOR J=1 TO G
141 POKE P+M+INT (RND*30+1),U
142 NEXT J
150 IF C=0 THEN GOTO 80
151 FOR J=1 TO C
152 POKE P+M+INT (RND*32),23
153 NEXT J
160 GOTO 80
200 PRINT AT N,D;" ";AT 12,E;"
"
201 PRINT AT 19,8;"SHIP DESTROY
ED"
210 PRINT AT 10,9;"END OF GAME
";AT 12,10;"REPLAY  Y/N"
215 IF B>S THEN LET S=B
220 PRINT AT 21,1;"YOU SCORED "
;B;AT 21,17;"HIGH SCORE=";S
225 IF INKEY$="Y" THEN GOTO 230
226 IF INKEY$="N" THEN GOTO 900
227 GOTO 225
230 CLS
231 GOTO 10
240 RAND USR 16592
245 RAND USR 16592
250 IF H=5 THEN GOTO 200
252 PRINT AT N,D;" ";AT 12,E;"
"
255 FOR J=1 TO 30
256 PRINT AT 19,3;"SWALLOWED B
Y BLACK HOLE";AT 19,3;"SWALLOW
```

(continued on next page)

(continued from previous page)

```
ED BY BLACK HOLE ";AT 0,0;
 260 NEXT J
 270 GOTO 210
 300 LET Y=USR 16561
 301 LET M=0
 302 LET N=13
 310 GOTO 140
 400 LET X=USR 16529
 401 LET M=759
 402 LET N=11
 410 GOTO 140
 450 LET Z=USR 16592
 451 PRINT AT 6,5;" YOU HAVE ENT
ERED AN.";AT 7,5;" ANTIMATTER UN
IVERSE."
 452 GOTO 201
 460 LET A=0
 470 LET B=B+10
 480 RETURN
 500 IF T=100 THEN GOTO 530
 510 FOR J=1 TO 25
 511 PRINT AT 21,5;"ALIEN SHIPS
NEARBY"
 512 NEXT J
 513 PRINT AT 21,5;"
     "
 520 LET T=100
 529 IF H<>5 THEN RETURN
 530 FOR J=1 TO 12
 531 PRINT AT 21,4;" YOU ARE UND
ER ATTACK ";AT 21,4;" YOU ARE UN
DER ATTACK ";AT 0,0;
 532 NEXT J
 540 PRINT AT 21,4;"
     "
 550 LET W=133
 560 LET A=A+1
 570 IF A>=3 THEN GOTO 640
 580 RETURN
 600 FOR J=1 TO 5
 601 POKE F-33,128
 602 POKE F-1,128
 603 POKE F,128
 604 POKE F+1,128
 605 POKE F+33,128
 606 POKE F-33,0
 607 POKE F-1,0
 608 POKE F,52
 609 POKE F+1,0
 610 POKE F+33,0
 620 NEXT J
 630 LET A=A+1
 640 IF A>=4 THEN GOTO 200
 650 FOR J=1 TO 20
 655 IF A=1 THEN PRINT AT 21,1;"
COLLISION WITH WHITE DWARF"
 660 IF A=2 THEN PRINT AT 21,1;"
SHIELDS DOWN TO HALF POWER"
 665 IF A=3 THEN PRINT AT 21,1;"
SHIELDS COMPLETELY EXHAUSTED"
 670 NEXT J
 680 PRINT AT 21,1;"
     "
 690 RETURN
 700 PRINT AT N,E;" "
 701 POKE F,52
 702 FOR J=1 TO 3
 703 POKE F,61
 704 POKE F,21
 705 POKE F,23
 706 NEXT J
 707 POKE F,151
 708 POKE F,52
 710 LET B=B+1
 720 RETURN
 800 LET C=INT (RND*4)
 801 LET G=INT (RND*3)+1
 810 FAST
 815 CLS
 820 GOTO 40
 900 CLS
 910 RAND USR 16514
 915 FOR J=1 TO 50
 920 PRINT AT 12,5;" OK THANKS F
OR PLAYING "
 925 NEXT J
 930 NEW
1000 CLS
1010 SAVE "DEEP SPACE"
1020 LET V=USR 16514
1030 PRINT AT 8,5;" ***DEEP SP
ACE*** ";AT 12,1;"PLEASE SWITCH
 TO INVERSE VIDEO";AT 12,1;"PLEA
SE SWITCH TO INVERSE VIDEO";AT 2
2,3;"FOR INSTRUCTIONS PRESS ""0"
";AT 20,3;"TO PLAY PRESS ""1""
1035 POKE 16580,201
1040 IF INKEY$="0" THEN GOTO 200
0
1050 IF INKEY$="1" THEN GOTO 107
0
1060 GOTO 1030
1070 PRINT AT 0,0;"*** DEEP SPAC
E ** DEEP SPACE ***"
1072 FOR J=1 TO 24
1073 LET Y=USR 16561
1074 NEXT J
1075 POKE 16580,0
1076 FOR J=1 TO 24
1077 LET Y=USR 16561
1078 NEXT J
1080 RUN
2000 PRINT AT 1,1;"
2001 PRINT "* YOU ARE THE CAPTAI
N OF A * SPACE TRAWLER FROM
ING THE * UNIVERSE IN SEARCH
OF STARS. *"
2002 PRINT "*
2003 PRINT "* BEWARE OF WHITE DW
ARFS THEY * WILL DAMAGE YOUR S
HIELDS AND * LEAVE YOU DEFENCEL
ESS AFTER * THREE COLLISIONS.
YOUR SHIP * MAY THEN BE DESTRO
YED BY AN * ATTACK FROM HOSTIL
E SHIPS."
2004 PRINT "*
2005 PRINT "* YOU ARE UNARMED AN
D CANNOT * OUTRUN THEM AND OUR
ONLY ESCAPE * ACTIVE NAVE IS TO
SPACE JUMP * INTO THE NEW PERIL
S OF AN * UNKNOWN UNIVERSE."
2006 PRINT "*
2007 PRINT "*
2008 PRINT "* PRESS 0 FOR MORE I
NFORMATION *
2009 PRINT "*
2010 PRINT "*
2011 IF INKEY$<>"0" THEN GOTO 20
11
2012 FOR J=1 TO 24
2013 LET Y=USR 16561
2014 NEXT J
2015 PRINT AT 1,0;"*
2016 PRINT "* SCORING AND
POINTS *
2017 PRINT "*
2018 PRINT "* ONE POINT IS GAINE
D FOR EACH * STAR CRUSHED
2019 PRINT "*
2020 PRINT "* TEN POINTS ARE GIV
EN FOR AN * ALIEN SHIP CRUSHED
2021 PRINT "*
2022 PRINT "* BUT BEWARE..
2023 PRINT "*
2024 PRINT "* YOU CAN ONLY WITHS
TAND THREE * HITS BEFORE YOU
R SHIP IS * DEFENCELESS. ALTHOU
GH YOU CAN * RESTORE YOUR SHIEL
DS TO FULL * POWER IF YOU MANAGE
 TO CATCH * AN ALIEN SPACECRAFT
2025 PRINT "*
2026 PRINT "* USE CURSOR KEYS TO
 MOVE AND * 'H' FOR A HYPERSPA
CE JUMP. * WHEN YOU ARE READY
 PRESS '1'
2027 PRINT "*
2028 IF INKEY$<>"1" THEN GOTO 20
28
2029 GOTO 1075
```

Program 3.

```
 1 REM (97 CHARACTERS)
 2 LET X=16514
 3 INPUT A$
 4 IF A$="S" THEN STOP
 5 PRINT A$;"-";
 6 POKE X,16*CODE A$+CODE A$(2
)-476
 7 LET X=X+1
 8 GOTO 3
```

The best way to put 1,568 steps in your pocket.

NEW LOW PRICE £59.95 R.R.P.

Once again Casio takes the giant step forward – with a pocket computer package able to fulfil a wide range of business and personal demands yet doesn't demand an expert to operate.

The Casio PB100 comes complete with our 'Learn as you go' system manual that enables you to enjoy the full benefits even if you've never operated a computer before. Making easy sense of the BASIC computer language, the PB100 is capable of an amazing variety of functions – plus a variety of computer games to extend your versatility.

The PB100 is just one of Casio's amazing range of high technology products all of which offer outstanding value for money.

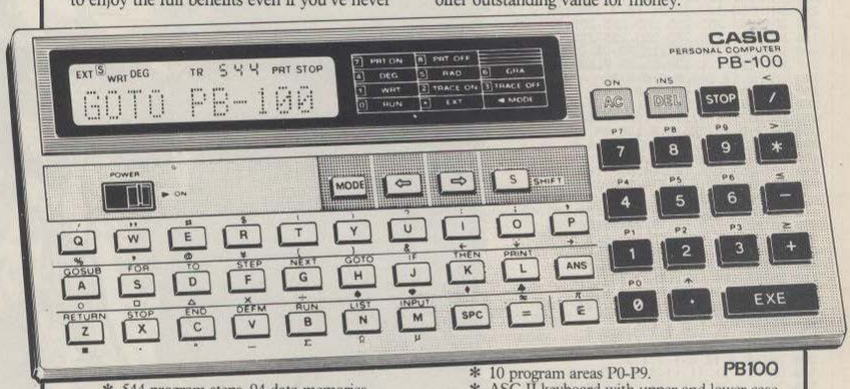

* 544 program steps, 94 data memories (expandable to 1568 steps or 222 data memories with optional RAM pack).
* Auto power-off function with programs/data preserved with power off.
* Many convenient user functions built in, inc: trigonometrics/inverse trigonometrics, logarithms/exponentials, powers, symbolization, random numbers.
* 10 program areas P0-P9.
* ASC II keyboard with upper and lower case characters display.
* 8 levels of sub routines and 4 levels of "FOR-NEXT" looping.
* Compact, lightweight.
* System can be upgraded with cassette tape recorder interface (FA3) and memory expansion RAM pack (OR1).

CasioMagic!

CALCULATORS
WATCHES
KEYBOARDS
CASH REGISTERS

CASIO®

Casio Electronics Co. Ltd., Unit 6, 1000 North Circular Road, London NW2 7JD.

To: Casio Electronics Company Limited, 2/YC/83
Unit 6, 1000 North Circular Road, NW2 7JD.
Please send me full details of the Casio PB100.

Name _____

Address _____

```
1 REM***MINOTAUR***
3 REM***R.MIAH (C)1982***
10 FORA=0TO1024
20 POKE6144+A,PEEK(32768+A)
30 NEXT
40 FORA=0TO581
50 READD
60 POKE6144+A,D
70 NEXT:POKE36869,254
100 DATA0,0,0,0,0,0,1,14
110 DATA0,0,0,0,0,0,192,32
120 DATA0,0,0,0,0,0,0,3
130 DATA0,0,0,0,0,0,0,64
140 DATA0,0,1,2,4,8,16,32
150 DATA0,128,96,16,8,4,194,161
160 DATA16,32,35,66,132,68,34,17
170 DATA24,6,129,64,32,16,8,4
180 DATA0,0,224,16,8,4,3,65
190 DATA0,8,4,2,1,7,31,191
200 DATA20,41,226,252,255,255,255,255
210 DATA16,8,135,127,255,255,255,255
220 DATA4,8,85,250,252,248,241,226
230 DATA64,137,18,36,72,144,32,64
240 DATA144,8,8,8,8,8,112,129
250 DATA128,128,128,128,128,128,128,0
260 DATA12,3,0,0,0,0,0,0
270 DATA131,128,0,0,0,0,0,7
280 DATA160,80,40,20,122,93,143,215
290 DATA255,127,63,31,15,3,159,106
300 DATA255,255,255,255,255,255,255,253
310 DATA255,255,255,255,255,255,255,107
320 DATA132,105,82,111,79,31,255,255
330 DATA129,2,1,128,64,32,0,192
340 DATA2,14,240,0,0,0,0,0
350 DATA0,1,0,0,0,0,0,0
360 DATA8,240,128,185,112,9,6,0
370 DATA32,24,4,11,4,197,36,126
380 DATA10,18,226,0,0,128,64,32
390 DATA220,132,4,22,33,32,16,8
400 DATA171,8,8,8,0,0,0,0
410 DATA252,224,192,64,0,8,100,130
420 DATA96,32,16,8,4,4,5,2
430 DATA0,0,0,0,0,0,0,192
440 DATA188,252,62,249,153,153,173,49
450 DATA31,17,8,36,19,72,39,16
460 DATA8,136,105,115,141,0,0,0
470 DATA31,98,132,136,114,5,122,2
480 DATA3,2,131,131,131,6,9,9
490 DATA0,128,128,64,33,18,12,0
500 DATA32,16,16,240,16,0,0,0
510 DATA17,16,16,16,16,8,4,12
520 DATA0,0,0,0,0,7,8,18
530 DATA0,126,129,0,255,0,0,0
540 DATA0,0,0,0,0,224,16,72
550 DATA9,9,10,2,1,1,1,3
560 DATA14,11,11,11,9,9,9,9
570 DATA39,39,229,228,226,224,240,248
580 DATA0,128,129,129,66,36,60,0
590 DATA196,228,228,36,69,15,31,63
600 DATA4,56,112,144,144,144,16,16
610 DATA9,9,9,9,8,8,8,4
620 DATA252,251,249,253,255,255,127,255
630 DATA0,255,36,36,165,247,255,255
640 DATA127,191,190,254,254,254,254,252
650 DATA16,16,16,16,16,16,32,32
660 DATA4,2,1,0,0,0,0,0
670 DATA126,124,56,146,147,82,78,34
680 DATA103,1,0,204,51,35,51,115
690 DATA248,240,96,161,97,97,194,4
700 DATA32,64,128,0,0,0,0,0
710 DATA33,16,8,4,3,0,0,0
720 DATA254,124,0,0,0,255,0,0
730 DATA8,16,32,64,64,128,0,0
740 DATA0,0,0,0,0,0,0,0
750 DATA0,0,0,171,168,232,168,168
760 DATA0,0,0,227,132,135,132,132
770 DATA0,0,0,17,149,153,153,149
780 DATA0,0,0,234,10,196,4,228
790 DATA201,169,198,198,166,198,0,0
800 DATA193,161,161,193,161,169,0,0
810 DATA20,181,85,21,21,21,0,0
820 DATA201,41,47,233,41,41,0,0
1000 PRINT"□"
1001 FORX=0TO585:POKE7680+X,64:NEXT:
1010 PRINT"XXXXXXXXXXXXXR——BCDE-
1020 PRINT"DDDDDDFGHIJKLMNO-
1030 PRINT"DDDDDDFORSTUVWX-
```

MINOT

MINOTAUR IS for a Vic with a 3K expansion. Each time the program runs it draws a different maze. The player's task is to move from start to finish in the shortest possible time, using the B, N, H and space keys to direct a light square left, right, up and down — respectively.

Before setting up the maze, the program displays the Minotaur in what might be called an opening-page sequence. By making extensive use of user-defined characters a rather startling display is achieved which pushes the Vic graphics to the limit.

However, strictly speaking, this display is not essential to the rest of the program and accounts for nearly half the program's length. Anyone who wishes to forgo this graphic treat can save themselves a lot of keying in. To do this leave out lines 40 to 2050; keep line 70 but remove the Next at the beginning.

When you run the program nothing appears on the screen for about 45 seconds. It takes this amount of time to set up the high-res graphics.

Vic owners with 16K or 8K expansion packs might like to try their hands at converting Minotaur to the different memory configuration. One solution to this problem would be to move the start of Basic to 7168 and load the new character set to 5120. They will need to type in Poke 7168,0: Poke 44,28 before loading to move Basic, and Poke 36869,205 to relocate the character definitions at 5120.

All references in the program to the screen and colour memory maps, as well as the start of the character set, will also need to be changed.

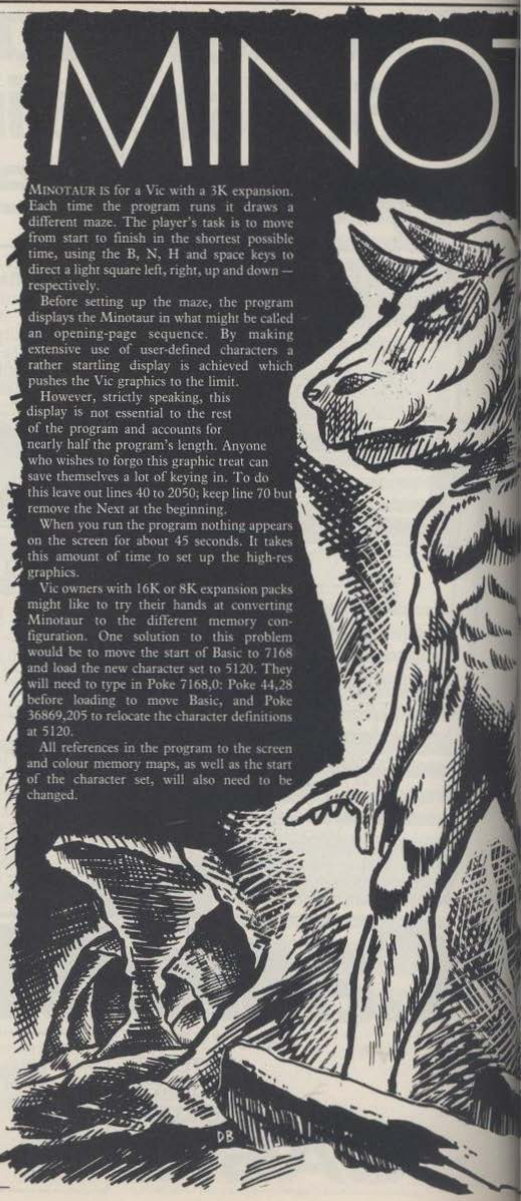

TAUR

In escaping the Minotaur, the least of Theseus's worries was how he was doing against the clock — that's your problem in Roger Miah's game for the Vic.

```
1040 PRINT"▮▮▮▮▮▮▮YZ↖}↑~ !-
1050 PRINT"▮▮▮▮▮▮▮--#%&'(-
1060 PRINT"▮▮▮▮▮▮▮-)#,--
1070 PRINT"▮▮▮▮▮▮▮-,./012-
1080 PRINT"▮▮▮▮▮▮▮--34567-
1090 PRINT"▮▮▮▮▮▮▮--89:;<-
2000 PRINT"▮▮▮▮▮▮▮---=>?-
2001 PRINT"▮▮▮▮▮▮▮▮▮▮▮▮▮▮|--"
2002 PRINT"IIIIIIIIIIIIIIIIII▮▮▮▮▮▮▮▮▮▮▮▮▮▮
```

COMPETITION-PRO JOYSTICK

PRECISION GAME CONTROL!

For ZX SPECTRUM
Complete with stylish interface unit simply plug in for instant arcade action.

ONLY £25.00 inc. VAT

Outstanding Features

- Super strong nylon and steel construction, built to last.
- A total of 8 directions plus 2 large fire buttons.
- Arcade proven moulded leaf switches ensure incredible reliability.
- Complete with self contained boxed interface which simply plugs into the Spectrum expansion port (with or without printer).
- Easily programmed in BASIC or M/C.

These arcade games, designed exclusively for the **Joystick** by leading software houses, are now available for Spectrum:

Time Game	M/C	48K	£6.95
Meteroids	M/C	16K	£4.95
Spooky Man	M/C	16K	£4.95
Cosmos	M/C	16K	£4.95

Watch this space for new software!

KEMPSTON
MICRO ELECTRONICS
180a Bedford Road, Kempston, Bedford MK42 8BL

I wish to order:

Quantity	Item	Price
	Post & Packing	£1.00
	Total (VAT inclusive)	

Cheques/Postal orders should be made payable to Kempston (Micro) Electronics

Name _____

Address _____

_____

Post to Kempston (Micro) Electronics, Dept 180a Bedford Road, Kempston, Bedford MK42 8BL

Keyboard with Electronics for ZX81

A full-size, full-travel 43-key keyboard that's simple to add to your ZX81 and requires no soldering in the ZX81.

Complete with the electronics to make "Shift Lock", "Function", and "Graphics 2" single key selections making entry far easier.

Powered from ZX81's own standard power supply – with special adaptor supplied.

Two-colour print for key caps.

Amazing low price only **£19.95** incl. VAT and carriage. Order As LW72P

Full details in the June 1982 issue of "Electronics – The Maplin Magazine" on sale at all good newsagents price 60p. In case of difficulty send 60p to address below, or £2.40 for annual subscription (4 issues).

MAPLIN Electronic Supplies Ltd
P.O. Box 3, Rayleigh, Essex SS6 8LR. Tel (0702) 552911

Retail shops at
159 King St., Hammersmith, London W6. Tel 01-748 0926
284 London Road, Westcliff-on-Sea, Essex. Tel (0702) 554000
Lynton Square, Perry Barr, Birmingham. Tel: (021) 356 7292
(Shops closed Mondays). All mail to Rayleigh address.

Now available from J.P. GIBBONS A.I.B.

(Author of The Best Banking Programs In The World!)

The PBS Bank reconciliation is believed to be the first such program to be available for the Sinclair ZX81 and ZX Spectrum

- AUTOMATICALLY MATCHES BANK STATEMENT ITEMS WITH TRANSACTIONS RECORDED IN YOUR **'PERSONAL BANKING SYSTEM'**.
- LISTS ALL OUTSTANDING ITEMS SUCH AS UNCLEARED CHEQUES, FUNDS RECEIVED BUT NOT ADVISED TO YOU, BANK CHARGES – HIGHLIGHTS ALL DISCREPANCIES. NO MORE 'SCRATCHING AROUND' TO TRY AND FIND OUT WHY YOUR STATEMENT BALANCE IS DIFFERENT TO WHAT YOU EXPECTED.
- FULL SEARCH FACILITY, ALLOWING ON-SCREN CORRECTION OF ANY ITEM.
- SAVES AND LOADS DATA TO AND FROM TAPE (ZX81 VERSION, AT DOUBLE SPEED). EXCHANGES DATA WITH THE MAIN PBS PROGRAM. NO NEED TO SAVE PROGRAMS.
- SINGLE KEY OPERATION – USES MACHINE CODE KEYBOARD SCAN FOR SINGLE LETTER COMMANDS (ZX81 VERSION).
- EXTREMELY EASY TO USE. NO JARGON TO WADE THROUGH BEFORE YOU GET STARTED. DEMONSTRATION PROGRAM INCLUDED.
- ALL ITEM LISTS, SEARCHES (WITH TOTALS), CAN BE OUTPUT TO YOUR ZX PRINTER.
- FULL INSTRUCTIONS INCLUDED.
- UNIQUE AFTER SALE MAINTENANCE PROVIDED.
- OPERATES IN CONJUNCTION WITH THE **'PERSONAL BANKING SYSTEM'** (FULL INPUT & CORRECTION FACILITIES PLUS AUTOMATIC POSTING OF STANDING ORDERS ON DUE DATES AND FULLY DETAILED STATEMENTS).

SO BANISH THE HEADACHES, MAKE LIFE EASIER FOR YOURSELF, SEND £15 FOR THE **PERSONAL BANKING SYSTEM + PBS BANK RECONCILIATION** AND USERS MANUAL.
EXISTING CLIENTS NEED ONLY SEND £5 FOR THE **PBS BANK RECONCILIATION** WHICH WILL OPERATE WITH THEIR PRESENT PBS.
THE **PERSONAL BANKING SYSTEM** (AS REVIEWED IN POPULAR COMPUTING WEEKLY – 1ST JULY) IS AVAILABLE SEPARATELY FOR £9.95 FOR CASSETTE & USER MANUAL. ZX81 PBS OWNERS CAN ORDER THE SPECTRUM VERISON FOR JUST £5.
PLEASE SPECIFY WHETHER ZX81 (16K) OR ZX SPECTRUM (48K).

Guaranteed Software available from:
J.P. GIBBONS A.I.B.
14 Avalon Road, Orpington, Kent, BR6 9AX

Your PBS is never out of date!

ZX81 (16K) MAP ASSISTED COMPUTER WARGAMING

Historically accurate Simulations

CARRIER STRIKE £12.50

In August 1942 Japan despatched a carrier fleet to support transports on their way to reinforce Guadalcanal.

On August 23rd aircraft from the USS Saratoga sighted part of this fleet. The Battle of the Eastern Solomons had begun.

Historically the outcome was a draw. Can you change history and provide the Americans or the Japanese with a decisive victory. Carrier Strike gives you that opportunity, recreating all the problems facing the Admirals of the time.

Other Battles Available:—

Napoleon at Austerlitz	£12.50
Desert Rats	£12.50

Cheques or PO's made payable to:

K W SOFTWARE
155 Ringinglow Road, Sheffield S11 7PS

ZX Workstations.. for Spectrum & ZX81

These stylish plinths, in tough moulded ABS, will raise and tilt the TV for better viewing, and angle the computer for easier typing. The power supply is fixed underneath. The printer can be used with the Spectrum version, the RAM with the '81', and the cassette player with both. Full details from: Peter Furlong Products, Unit 5c, South Coast Rd Ind. Estate, Peacehaven, Sussex BN9 8NA. Tel (07914) 81637

Every computer needs a

CHATTERBOX!

"OK Spock, you win *this* time...." NEW! SAVE £££s

for **ZX81 SPECTRUM**

NASCOM, VIC, PET, BBC, APPLE, TRS80, IBM, CRAY, ETC. (Please state)

At last! Genuine phonetic synthesis at a sensible price. Gives your computer an *unlimited* vocabulary (nothing more to buy!). Self contained speaker/amplifier, Sinclair connector etc, **PLUS** Expansion socket for BIG EARS **AND** Monitor socket for Music Board. Full instructions, technical notes and programme examples supplied with this outstanding educational unit.

OR COMPLETE D.I.Y KIT £39

DEALER ENQUIRIES WELCOME

As seen on BBC TV "Computer Programme"

BIG EARS

STOP! GO! LEFT! RIGHT!

SPEECH INPUT FOR ANY COMPUTER

Hugely successful Speech Recognition System. complete with microphone, software and full instructions.

BUILT TESTED & GUARANTEED ONLY **£49**

PLEASE STATE COMPUTER: UK101, SPECTRUM, ATOM, NASCOM2, Vic 20, Micron, ZX80/81, PET, TRS80, MZ80K, APPLE II, BBC MICRO

NEW: FAST MACHINE CODE FOR ZX SPECTRUM £7.40

ZX81/SPECTRUM

MUSIC SYNTHESISER (STEREO) + 16 LINE CONTROL PORT

Play 3-part music, sound effects, drums etc. Full control of attack, decay and frequency. Input/Output lines provide control and monitor facility for Home Security, Robot Control, Model Railway etc. etc. Works with or without 16K RAM.

Add keyboard to make a live performance polyphonic synthesiser! Full instructions/software included.

AMAZING VALUE AT ONLY £19.50 (KIT)
Extra 23 way connectors at £2.60
£25.50 (BUILT)

THE COMPOSER

Music Programme for above synthesiser.
Enter and play 3 part harmony.
Includes demonstration tunes. Recommended £7.40

COLOUR MODULATOR

RGB in, PAL/UHF out (not for ZX) KIT £15 BUILT £20

SPECIAL OFFER I.C. £18
SPEECH OUTPUT CHIP SX-01
Phoneme Speech Processor DATA £0.60

Please add VAT at 15% to all prices. Barclay/Access orders accepted by telephone

All enquiries S.A.E. please

WILLIAM STUART SYSTEMS Ltd
Dower House, Billericay Road, Herongate, Brentwood, Essex CM13 3SD, England
Telephone: Brentwood (0277) 810244

FORTH BASIC

Will assemblers become a thing of the past? Ian Maclean thinks so and helps to hasten the day by showing you how to hit the stack.

ALL OF A sudden Forth seems to have taken off in a big way; not only have we seen the arrival of the Jupiter Ace — the first-ever Forth home computer but the ZX-81, Atom, BBC and Vic can all now use Forth, making it the second most popular high-level micro language. Speed is a major element in its appeal, and its speed is due to the fact that Forth is a compiled language, that is, the high-level words are translated into a pseudo-machine code and then run in this form giving up to 90 per cent of the speed of machine code. Could assemblers soon become a thing of the past? I think the answer is undoubtedly yes, within the next five or ten years.

A good Forth analogy is given by the balls they put into plastic pipes in bingo. The number is put on to the top and can only be taken from the top of the pile. A stack is a pile of numbers worked on a last-in, first-out system. In Forth, the reserved words Do, If, Int, take their arguments from the stack; a simple Basic-Forth example:

```
BEEP 50, 100      100 50 BEEP
```

Although Beep is not standard Basic or Forth, it demonstrates the principle admirably. The Basic word Beep is interpreted during Running, the interpreter comes across the word Beep and commences to look for the two numbers and the comma which it requires to function. In the meantime, the Forth compiler has put the two numbers on the stack and already executed the word Beep.

Before I proceed with the comparisons there is one further idea which the Basic user has to come to terms with, and that is that there is no actual program. Each sub-program is defined and given a name by which it can be called and executed, for example, a routine called Part 1 would have the following structure:

```
: PART 1
(ROUTINE);
```

Note the space between the colon — which signified a word definition — and the name. Also notice that the word is terminated with a semi-colon. On then to the Forth words which you can put in your word definitions.

Let: The Basic word Let is used in assigning a value to a variable. In Forth there are no pre-defined variables, so before you can define a word using a variable, you have to define it. To set up variable A, for example, with an initial value of zero we type:

```
0 VARIABLE A
```

Now the computer knows what you are talking about when you refer to A. To put a number in a variable, A again, we type:

```
n A !
```

where n is the number to be put in A. To recall the value from A back on to the stack we use

```
A @
```

This may seem strange at first, but so did Basic when I first started programming.

Goto: This word does not exist in Forth, nor does it have any direct equivalent. The nearest thing to it is **Gosub** — this is easy. To call a routine, the routine is first defined as a word, then the word is simply incorporated as with any other Forth word. So in this way a program may be initially written as several subroutines and end up defined by a single word and Run as such.

For-Next: These words are replaced in Forth by Do and Loop or +Loop. The limit and initial value of the loop are put on to the stack first, before the word Do:

```
10 0 DO
```

This is the same as

```
FOR variable = 0 TO 10
```

At the end of a loop we can replace the Basic word next with either Loop or +Loop. Loop means "Jump back to Do and add 1 to the loop counter". +Loop means "jump back to Do and add the value on the stack to the loop counter". In other words, +Loop is used for step values other than 1 and is added at the end of a loop like so:

```
2+LOOP
```

This means "step 2" although other values could be used instead of two.

Our loop now looks like this:

```
(limit) (initial value)
(routine)
(step value) + LOOP
```

In Forth, there are several kinds of loop, a further two, in fact. These are conditional loops; Begin — Until and Begin While. These two types are quite simple, but come in very handy.

Firstly, Begin-Until; this is a conditional loop which will repeat the routine it encloses until a positive value is left on the top of the stack before Until. Since we know how to read variables, we can control a Begin-Until loop with one, A, for example:




```
BEGIN
(routine)
A @ UNTIL
```

The same applies to the Begin-While loop which will repeat the loop While the value before While is positive. Again, if the variable A is controlling the loop, it would look like this:

```
BEGIN
(routine)
A @ WHILE
```

Rem: A remark in Forth is very simple, the comment being closed within brackets:

```
(THIS IS A COMMENT)
```

Be careful here, Forth has no mathematical parentheses, so if you attempt anything along those lines you will end up with a jumbled comment.

Input: Forth's equivalent of Basic's Input is Query, which opens up the input buffer for a numerical value to be entered.

Forth also has another kind of input statement, though: Line, which will take an alphanumeric input from the buffer and execute it as a "program" line, before returning back to the main flow. I use it at the end of games, for example, one called Game:

```
: GAME
(main program)
LINE ;
: YES GAME ;
: NO ;
```

In this example Line allows the user to call a word; in this case it would follow the prompt "play again". By typing Yes the user calls the word Yes which in turn executes Game again. If he types No then he executes the word No which Quits the program and hands the

Figure 1

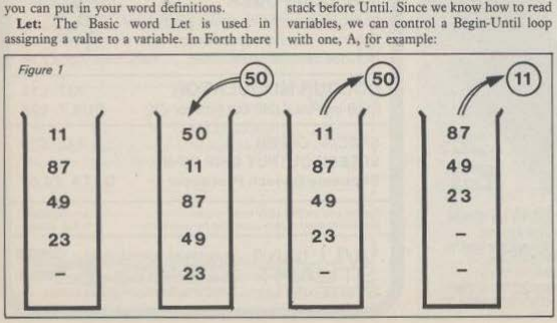

FOR USERS



keyboard back for programming.

Print: Forth has two very different words for printing characters. Firstly, there is ." which is the equivalent of Print and is used in much the same way:

```
." HELLO"
```

is the same as

```
PRINT "HELLO";
```

Note the space between." and the first character of the string. To get on to the next line we use a carriage return CR, thus:

```
." HELLO" CR
```

is the same as

```
PRINT "HELLO"
```

In some cases it is only necessary to print out one character, here we use Emit. Emit will print out after the last print position the ASCII character whose value is on the stack. For example:

```
65 EMIT
```

prints an 'A'. To Emit a space we can use a special word called

```
SPACE
```

Further to this, to emit several spaces Forth contains a word called Spaces, which takes the number of spaces to be emitted from the top of the stack. So, to emit ten spaces we type:

```
10 SPACES
```

If-Then If-Then in Forth is the same in theory as Basic's version, but is somewhat 'jumbled'. As a rough guide:

```
IF A=0 THEN
```

and

```
A@ 0=IF
(routine)
THEN
```

These are the same. This can be repeated with 0> and 0<. The word If in Forth is considerably different from Basic's version as it will execute the routine if it finds a positive value on the stack. This positive value is usually 1 or 0 as this is what 0=, 0< and 0> produce:

0= puts a 1 on the stack if the value formerly on the stack is zero.

0< puts a 1 on the stack if the value formerly on the stack is negative.

0> puts a 1 on the stack if the value formerly on the stack is positive.

The word Else can also be used so:

```
IF
(routine executed if
stack value is positive)
ELSE
(routine executed if
stack value zero or less)
THEN
```

Finally, a program — listing 1 — written to demonstrate some of the terms briefly covered in this article. Don't be put off by its apparent complexity as all of the words used have been explained. ■

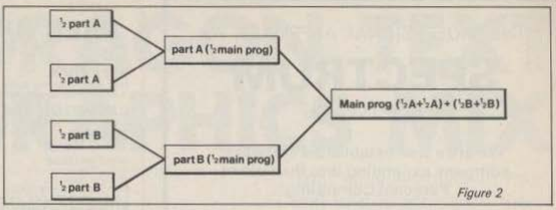

Figure 2

Listing 1

Stack	Definition
: NUMBERS	Program name — type this word to run program
." ENTER ANY NUMBER"	Prompt
QUERY	Inputs value
." TYPE :" CR ." SQUARE TO SQUARE THE NUMBER" CR ." CUBE TO CUBE THE NUMBER" CR ." OR" CR ." PATTERN TO MAKE THE NUMBER INTO A PATTERN"	
LINE	Allows Forth word to be called
;	End of numbers word definition
: SQUARE	Program name
DUP	Duplicates number on top of the stack
*	Multiples the two numbers on the top and second stack positions
.	Outputs the number on top of the stack
;	End of Square Word definition
: CUBE	Program name
DUP * SQUARE	Squares number and calls 'square' to square it again and print it out
;	End of cube word definition
: PATTERN	Program name
10 0 DO	Starts loop from 0 to 10
DUP	
I	I retrieves the loop counter value
SPACES	Outputs 'I' number of spaces
.CR	
LOOP	Increments loop counter and jumps to 'DO' if not 10
0 10 DO	Starts loop from 10 to 0
DUP I SPACES . CR	
0 1–	Takes 1 from 0. Puts –1 on stack
+LOOP	Adds –1 to loop counter; decrements loop counter by 1
	End of pattern word definition

Machine	Company	Price	Where obtainable
ZX-81	QCP	£10	11c, Hercies Road, Uxbridge, Middlesex
ZX-81	Artic	£29.95	396 James Reckitt Avenue, Hull, North Humberside HU8 0JA
Atari	Maplin	£49.95	P.O. Box 3, Rayleigh, Essex
Vic	Adda	£38.95	Adda: high street stockists or 154 Victoria Road, London W3
Atom	Acornsoft	£17.50 (with manual)	4A Market Hill, Cambridge CB2 3NJ
BBC	Level 9	£15	229 Hughden Road, High Wycombe, Buckinghamshire HP13 5PG
Dragon 32	Microtanic	£24.95	235 Friern Road, Dulwich, London

THE PROFESSIONAL APPROACH TO

SPECTRUM

SOFTWARE

We are a well established software company expanding into the field of Personal Computing.

ENHANCE YOUR BASIC

Now available BASIC toolkit includes:

- Add logical arithmetic functions (AND, NOT, OR, XOR)
- List all BASIC variables and arrays
- Speed up your games with our fast screen output.
- Renumber your program (including GOTO and GOSUB)
- All routines in machine code
- Easily called from BASIC
- Fully documented
- Runs on 16K and 48K SPECTRUM

£9.95 inc VAT (+ £1 p. & p.)

To order or to obtain details of our other products contact:

Malva Ltd. 70 ASHCHURCH DR. WOLLATON NOTTINGHAM NG8 2RA

REAL TIME SOFTWARE SPECIALISTS

BEEB BITS from CLARES

BEEBSTICK:
Fully proportional high quality joystick complete with 4 programs. As reviewed in the November issue of "BEEBUG" £29.95

CASSETTE LEADS:
DIN to DIN + Remote £2.50
DIN to 3 Jacks £2.50
DRAGON Lead £2.50

MONITOR LEADS:
BNC to Phono £2.95
Phono to Phono £1.50
6 pin DIN to DIN RGB LEAD £2.50
SERIAL PRINTER LEAD (Acorn Specs) £7.50
All Leads are Top Quality and carry an Unconditional Guarantee.

SOFTWARE: "GRAFKEY" & "GRAFSTIK"
These superb programs allow you to easily create graphics, diagrams, technical drawings etc. The drawing can then be saved to tape and included in your own programs by using the very short REDRAW routine provided. Modes include lines, rectangles, triangles, circles, write and all in up to 8 colours. A very special mode is the RUBBER BANDING (as seen in that famous HORIZON TV program). Now you can do it on your BEEB. Used in schools and industry, GRAFKEY is for keyboard and GRAFSTIK will work with ANY joystick. Data is common to both programs and will be compatible with GRAFPAD and GRAFPEN when available.

GRAFKEY & GRAFSTIK are incredibly powerful and flexible

"JOYSTICK GRAPHICS" is similar to GRAFSTIK but only uses line mode giving more control over the lines, screen, scale and array.

"JOYSTICK PACK ONE" contains ZAP & SKETCH (two of the programs free with BEEBSTICK)

ALL PROGRAMS ARE PRICED AT £5.75 inc. but are worth double.

ALL PRICES INCLUSIVE OF VAT & CARRIAGE – NO EXTRAS

CLARES
222 Townfield Road,
Winsford, Cheshire CW7 4AX
Tel: 06065 51374

DOWNSWAY

ELECTRONICS (UK) LTD.

MEMORIES FOR THE ZX81

The Downsway 64K Memory* slots directly on to the computer, without needing an additional power supply, or adding any extra load to the internal 5v regulator. Trade in your old 16K RAM Pack (any make, any age, any condition) for £12.50 against a Downsway 64K Memory to bring the price down to only **£47.45** plus p & p. Without trade-in, it costs just **£59.95** plus p & p — still incredible value!

If you only want 16K of memory for your ZX81, the Downsway 16K RAM Pack offers the same benefits of high quality and low price at only **£24.95** plus p & p.

Both memories measure only 2½ x 1½ x 1in. and are supplied with a foam cushion strip to provide added mechanical stability.

* Reviewed in ZX Computing Aug/Sept 1982 and Popular Computing Weekly 22/7/82.

MORE MEMORY FOR YOUR ZX81 OR SPECTRUM!

NEW! 32K RAM FOR SPECTRUM

A full 48K of memory for the 16K Spectrum — simple D.I.Y. installation by just undoing 5 screws and plugging in!

For Issue One machines (with light grey keys) — a RAM board of advanced design, using "state-of-the-art" technology — only **£42.50** plus p & p.

For Issue Two machines (with dark grey keys) — a simple plug-in kit of I.C.s which fit straight in to the sockets already provided: only **£32.50** plus p & p.

Both come with fully detailed, illustrated instructions.

Naturally Downsway add-on memories are fully tested and guaranteed, but should you be dissatisfied for any reason, just return the memory within 14 days for a full refund (and your old 16K RAM pack, where appropriate).

Please allow up to 28 days for delivery.

DOWNSWAY ELECTRONICS (UK) LTD. DEPT. M, DOWNSWAY HOUSE, EPSOM ROAD, ASHTEAD, SURREY.

Please send me:

Qty.	Item	Price	Total
	32K RAM Board (Issue 1 Spectrum)	£42.50	
	32K RAM Kit (Issue 2 Spectrum)	£32.50	
	64K Memory for ZX81 at trade-in price	£47.45	
	64K at normal price	£59.95	
	16K RAM	£24.95	
	Post & packing		£2.00
	Total		£

My cheque/P.O./Money Order is enclosed

Please debit my Barclaycard No. .....

Name: .....

Address: .....

VISA

THAT DRAGON TEXT AND GRAPHICS MIX

```
10 GOTO800
14 REM MODE A CURSOR
15 A$=INKEY$:IFA$=""THENDRAW"XCC$;R1;XCA$;L1":GOTO15:ELSEGOTO200
24 REM DRAW TEXT
25 DRAW"C"+CB$+"A"+D$+"S"+STR$(S):ON(ASC(C$)-32)GOSUB33,34,35,36,37,
   38,39,40,41,42,43,44,45,46,47,48,49,50,51,52,53,54,55,56,57,58,59,
   60,61,62,63,64,65,66,67,68,69,70,71,72,73,74,75,76,77,78,79,80,81,
   82,83,84,85,86,87,88,89,90:RETURN
32 REM TEXT DATA
33 REM USER-DEFINABLE="!":RETURN
34 DRAW"BM+0,-6DBM+2,+0UBM+4,+6":RETURN
35 DRAW"BM-7,-7E3BM+4,+10":RETURN
36 DRAW"BM-4,-7H3BM+7,+10":RETURN
37 DRAW"BM-8,-7E2F2BM+4,+7":RETURN
38 DRAW"BM-6,+1DGBM+7,-3":RETURN
39 DRAW"BM+0,-6DBM+4,+5":RETURN
40 DRAW"BM+2,+8HU4EBM+4,+6":RETURN
41 DRAW"BM+1,+8EU4HBM+5,+6":RETURN
42 DRAW"BM+0,-1E4BM+0,+4H4BM+8,+5":RETURN
43 DRAW"BM+0,-3R4L2U2D4BM+5,+1":RETURN
44 DRAW"BM-1,+0DGBM+4,-2":RETURN
45 DRAW"BM+0,-3R4BM+4,+3":RETURN
46 DRAW"BM-1,+0UBM+4,+1":RETURN
47 DRAW"BM+0,-1E4BM+4,+5":RETURN
48 DRAW"BM+0,-1FR2EU4HL2GD4BM+8,+1":RETURN
49 DRAW"BM+1,+0U6GBM+6,+5":RETURN
50 DRAW"BM+4,+0L4UER2EU2HL2GBM+8,+5":RETURN
51 DRAW"BM+0,-1FR2EUHL2R2EUHL2GBM+8,+5":RETURN
52 DRAW"BM+3,+0U6G3R4BM+4,+3":RETURN
53 DRAW"BM+0,-1FR2EU2HL3U2R4BM+4,+6":RETURN
54 DRAW"BM+0,-2ER2FDGL2HU4ER2FBM+4,+5":RETURN
55 DRAW"BM+2,+0U2E2U2L4BM+8,+6":RETURN
56 DRAW"BM+1,+0R2EUHL2HUER2FDGL2GDFBM+7,+0":RETURN
57 DRAW"BM+0,-1FR2EU4HL2GDFR3BM+4,+3":RETURN
58 DRAW"BM+0,-3DBM+8,+2DBM+4,+1":RETURN
59 DRAW"BM+0,-5DBM+0,+2DGBM+5,+0":RETURN
60 RETURN
61 DRAW"BM+0,-2R4BM+0,-2L4BM+8,+4":RETURN
62 RETURN
63 DRAW"BM+2,+0UBM+0,-1UREUHLGBM+7,+5":RETURN
64 REM
65 DRAW"U5ER2FD5U3L4BM+8,+3":RETURN
66 DRAW"U6R3FDGFDGL3U3R3BM+5,+3":RETURN
67 DRAW"BM+1,+8HU4ER2FHL2GD4FR2EBM+4,+1":RETURN
68 DRAW"U6R3FD4GL3BM+8,+0":RETURN
69 DRAW"R4L4U3R4L4U3R4BM+4,+6":RETURN
70 DRAW"U3R4L4U3R4BM+4,+6":RETURN
71 DRAW"BM+1,+0R2EULRDGL2HU4ER2FBM+4,+5":RETURN
72 DRAW"U6D3R4U3D6BM+4,+0":RETURN
73 DRAW"BM+1,+0R2LU6LR2EM+4,+6":RETURN
74 DRAW"BM+0,-1FR2EU5BM+4,+6":RETURN
75 DRAW"U6BM+0,+3RE3G3F3BM+4,+0":RETURN
76 DRAW"R4L4U6BM+8,+6":RETURN
77 DRAW"U6F2E2D6BM+4,+0":RETURN
78 DRAW"U6DF4DU6BM+4,+6":RETURN
79 DRAW"BM+1,+0R2EU4HL2GD4FBM+7,+0":RETURN
80 DRAW"U6R3FDGL3BM+8,+3":RETURN
81 DRAW"BM+1,+0R2EU4HL2GD4FBM+1,-2F2BM+4,+0":RETURN
82 DRAW"U6R3FDGL3RF3BM+4,+0":RETURN
83 DRAW"BM+0,-1FR2EH4ER2FBM+4,+5":RETURN
84 DRAW"BM+2,+0U6L2R4BM+4,+6":RETURN
85 DRAW"BM+0,-6D5FR2EU5BM+4,+6":RETURN
86 DRAW"BM+0,-6D4F2E2U4BM+4,+6":RETURN
87 DRAW"BM+0,-6D6E2R2U6BM+4,+6":RETURN
88 DRAW"UE4UBM+0,+6UH4UBM+8,+6":RETURN
89 DRAW"BM+2,+8U4H2F2E2BM+4,+6":RETURN
90 DRAW"R4L4UE4UL4BM+8,+6":RETURN
199 REM CHECK VALID KEY:IF INVALID SOUND RASPBERRY
200 IFINSTR(1,B$,A$)=0THENSOUND2,5:GOTO15
209 REM IF KEY @ THEN GOTO MODE B
210 A=ASC(A$):IFA=64THEN300
219 REM IF KEY S THEN INCREASE SCALE
228 IFA=83ANDS<45THENS=S+1:GOTO290
229 REM IF KEY X THEN RESET SCALE TO DEFAULT
230 IFA=88THENS=4:GOTO290
239 REM IF KEY C THEN PCLS SUBROUTINE
240 IFA=67THEN500
```

(listing continued on page 73)

That elusive ability to mix text and graphics on the hi-res screen is now yours with Keith Brain's Graftext.

ONE OF the major criticisms of the Microsoft Extended Colour Basic as used on the Dragon 32 and the Tandy Colour Computer is that you cannot mix text and graphics on the high-resolution screen. In addition, colour in text mode is restricted to black on a green background. Well, like most facts, this is not strictly true if you are a trifle devious.

This Graftext program is a development of our Dragart program in November 1982's *Your Computer* and it achieves the aim of mixing text and graphics by Drawing the text on the high-resolution screen. This has the advantage that the text can be in any of the standard colours. It can also be of any reasonable size, and in four different directions on the screen.

Custom character sets and user-defined graphics are no problem, as of course the Draw command can be used to construct any shape you like. The whole of the program works immediately in response to Inkey$ commands. As the program is rather long the listing has many Rem statements to explain it. Remember that lower-case letters in the listing are inverse graphics on the screen.

On running the program, the instructions can be displayed, the resolution, foreground and background colours are selected, and checked for validity, and the appropriate high-resolution screen is then displayed.

At this point the program is in mode A, which operates in the same general way as direct drawing. The cursor draws in the colour selected by pressing the number corresponding to the required colour, in the direction selected by pressing U, D, L, R, E, F, G or H. The scale of drawing is increased by pressing S and reset to the default value by pressing X.

To Paint part of the screen press P: coordinates and colours will be requested. To Clear the screen use C, which requires that you confirm your request. To view the instructions press I, and press the Up cursor arrow to reach the Load and Save routines which allow you to dump high-resolution screens on to tape as machine-code files.

Pressing the @ key will move you into the new B mode where text — or user-defined characters — are generated and displayed. This has a larger cursor just below the current text line.

The most significant part of the program lies in lines 25-90. Line 25 evaluates the ASCII value of the key which has been pressed and uses this in an On-Gosub command to lead to

(continued on page 73)

Cambridge Computer Store

Two Great Micros – from Cambridge!

sinclair Spectrum

BBC Computer

Cambridge Computer Store

1 Emmanuel Street, Cambridge CB1 1NE
Phone (0223) 358264/65334
Also in our 'Budget Micros' Dept: ZX81: Lynx: Commodore 64

AMBA SOFTWARE

FAST ACTION GAMES FOR THE SPECTRUM AND ZX81 ALL IN MACHINE CODE

SUB TRACK (SPECTRUM) Use your wits to destroy the enemy submarines with depthcharges, but watch out for their mines and their secret weapon. Your ship could be blown out of the water. 24 game variations.

TREASURE HUNT (SPECTRUM) Explore one of the 29 mazes in search of treasure and grab as much as you can. This game can be played with or without moving obstacles; with one player, two players in opposition, or two players in partnership; and with part or all of the maze invisible. There are 144 variations of this fascinating game and even the game selector is fun to use.

HUNT (16K ZX81) A ZX81 version of Treasure Hunt with 48 variations.

X-MEN (16K ZX81) The only Puckman type game with all of these features: true gobbling action, bonuses, arcade type maze, 3 lives, graphic display of lives left, 4 monsters, a den, booster buns, high score, continuous on-screen scoring.

SNACKMAN (SPECTRUM) All the features of X-MEN plus 16 mazes, 10 speeds, and of course, high resolution colour graphics and great sound effects.

UFO (16K ZX81) A fast moving space game, not recommended unless your reations are lightning fast.

TRAP (16K ZX81) You control a growing wall and try to surround your opponent (computer or human) before he surrounds you. 12 variations.

£4.95 PER GAME ON CASSETTE

Available from:
BUFFER MICRO, LONDON
PHILLIP COPLEY, OSSETT
GAMER, BRIGHTON
GEORGES, BRISTOL
MICROWARE, LEICESTER
SCREENSCENE, CHELTENHAM

By Mail Order
Cheque P.O. To:
AMBA SOFTWARE
FREEPOST
(no stamp required)
CAMBRIDGE
CB3 7BR

At Last Your Chance To Crack The Machine Code

Trade Enquiries Invited

ZX81 and SPECTRUM OWNERS

- If you are interested in finding out how a computer REALLY works and want to experience TRUE PROGRAMMING POWER – THE MACHINE CODE TEST TOOL is the answer.
- The MACHINE CODE TEST TOOL is a utility program which comes complete with tutorial course enabling you to enter, test, display and debug hexadecimal machine codes simply and quickly.
- THE MACHINE CODE TEST TOOL is constructed to help the absolute beginner who wishes to explore this fascinating subject, or the expert keen to polish up his machine code programs.
- A HEX : decimal conversion routine is contained within the program as standard.

Post to: OXFORD COMPUTER PUBLISHING,
4 High Street, Chalfont St. Peter, Bucks SL9 4QB

Please send me ..... Machine Code Test Tools at £9.95 each
Tick box for edition required ☐ ZX81 ☐ SPECTRUM
Send cheque/postal order to above address

NAME .....

ADDRESS .....

..... POSTCODE ..... AYC 124

(continued from page 71)

the line which contains the information to Draw that particular character.

The use of (ASC(C$)–32) means that the appropriate line number is conveniently the same as the ASCII code for that character. These characters are constructed on a six-by-five matrix, and at the end of each drawing there is a blank move to the next draw position. The smallest size of legible characters gives a display of 16 by nine in modes 0, 1 and 2 and of 32 by 19 in modes 3 and 4. This drawing of the text will occur in the colour, and at the scale, for !, you have selected in mode A.

To vary these @ must be pressed to return to mode A, the parameter changed, then @ pressed again to return to mode B to continue with the text. When the space bar is pressed criss-cross moves in the background colour are made at the next text position. This can also act as a way of deleting text. Using the cursor keys simply makes a blank move by one character size.

In the listing shown, some of the symbol keys have been replaced by accents to enable foreign text to be presented correctly in a further language learning program. The accents automatically move back to the previous draw position. ASCII codes 32 for !, 60 for <, and 62 for >, have not been defined so far, so you can make these any character.

If you want more user-defined characters remember that all of the lower-case characters — reached by Shift 0 – are also available if you alter the valid key limits in line 350. ASCII code 64 is for @ and is never reached.

The angle of Drawing can be varied by pressing Enter when a tone is sounded to warn that the angle is about to be changed. A number — 0-3 — is then entered for normal, down, inverted or up text respectively. This direction is maintained until Enter is pressed again. This facility is particularly useful for labelling the axes of graphs. In mode B the Clear key is used to lead to the Clear Screen routine.

Try these examples to get an idea of the potential and then see what you can construct yourself.

```
RESOLUTION 1   BACKGROUND 1
FOREGROUND4
S(x5)D(x10)R(x10)H(x10)P20enter40enter2
enter4enter1R(x12)D(x4)XS
2@TRIANGLE↓←(x8)PAINTED IN↓ (x3)←(x10)
@4S@↓YELLOW
RESOLUTION 4   BACKGROUND 1
FOREGROUND 0
@ THIS IS A TEST enter 1DOWN enter 2UP
SIDE DOWN enter1DOWN AGAIN enter0@S
@→BIG@S
BIGGER @X@enter3 SMALLER AND UP
```

The main character-drawing routines — 25-90 — can also be incorporated as subroutines in other programs to print messages, labels or scores which are stored in strings. This can be simply demonstrated by adding these lines:

```
2000 PMODE4,1:SCREEN1,0:PCLS:D$ = "0"
2010LINEINPUT M$:FORN = 1TOLEN(M$):
C$ = MID$(M$,N,1):C = ASCI(C$):GOSUB
25:NEXT
2020 PMODE4,1:SCREEN1,0:GOTO2000
```

Run 2000, enter a word, and it will be displayed from the default position centre of the high-resolution screen. ■

(listing continued from page 71)

```
249 REM IF KEY P THEN PRINT SUBROUTINE
250 IFA=80THENR00
255 REM IF KEY I THEN INSTRUCTIONS SUBROUTINE
260 IFA=73THENGOSUB1100:GOTO1000
269 REM IF KEY L THEN LOAD SAVE SUBROUTINE
270 IFA=94THENT00
279 REM IF KEY 0 IS A NUMBER BETWEEN 0 AND 8 UPDATE COLOUR ELSE EXECUTE DRAW COMMA
ND (U,D,L,R,E,F,G,H) WITH CURRENT COLOUR, ANGLE AND SCALE
280 IFA>47ANDA<57THENCB#="C"+A#:LSEDRAW"C"+CB$+"A"+C$+"S"+STR$(S)+A$
289 REM SOUND KEY NOTE AND RETURN TO CURSOR
290 SOUND(89+ASC(A$)),2:GOTO15
299 REM MOVE B CURSOR
300 L$=INKE$:IFL$="":THENGRAW"BM+2,+2;XCC$;R2L4R2;XCA$;R2L4R2BM-2,-2":GOTO300
309 REM SPACE
310 IFC$=" "THENDRAW"XCB$;UGRDGRUGRD6RUGRD6BM+3,+0":GOTO300
319 REM IF KEY @ RETURN TO MODE A
320 C=ASC(C$):IFC=64THEN15
329 REM IF KEY ENTER THEN GOTO ANGLE SUBROUTINE
330 IFC=13THEN420
339 REM IF KEY CLEAR THEN GOTO PCLS SUBROUTINE
340 IFC=12THEN500
349 REM IF KEY VALID FOR TEXT THEN GOTO DRAW TEXT SUBROUTINE
350 IFC>32ANDC<91THENGOSUB210:GOTO300
369 REM CURSOR MOVEMENTS
370 IFC=10THEN$=""+0,+10
380 IFC=8THEN$=""-0,+0
390 IFC=9THEN$=""+0,+0
400 IFC=94THEN$=""+0,-10
410 DRAW"S"+STR$(S)+"A"+D$+"BM"+M$:GOTO300
419 REM ANGLE CHANGING SUBROUTINE
420 D$=INKE$:IFD$=""THENSOUND230,2:GOTO420
430 D=ASC(D$):IFD<48ORD>51THENGOTO420ELSEGOTO300
499 REM SCREEN CLEARING SUBROUTINE
500 CLS4:PRINT"CLEAR SCREEN (Y/N)":INPUTD$:IFD$<>"Y"THENGOTO10000ELSEPCLS:GOTO10
00
599 REM PRINT SUBROUTINE
600 CLS0:PRINT"PRINT COORDINATES":INPUTP1,P2:PRINT"PRINT COLOUR":INPUTPC:PRINT
"BORDER COLOUR":INPUTBC
618 PMODE2,1:SCREEN1,1:PRINT(P1,P2),PC,BC:GOTO15
699 REM LOAD SAVE SUBROUTINE
700 CLS4:PRINT95,"TAPE ROUTINE":PRINT@69,"S = SAVE":PRINT@133,"L = LOAD"
710 PRINT@197,"":INPUTT$:IFT$=CHR$(ANDT$)"L"THEN710
720 PRINT@251,"FILENAME":FORN=1TO7:PRINTCHR$(128);:NEXT:PRINT@298,"":INPUTF$:
IFLEN(F$)>7THENPRINT@298,"                    TOO LONG":GOTO720:ELSEF$="M"+F$:PRINT@384
,"WHEN TAPE READY PRESS SPACEBAR"
730 IFINKE$=""THEN730
740 IFT$="S"THENPRINT@384,"SCREEN SAVING":CSAVEMF$,1536,(1536+(1536*PG)),(1536*P
G):FORN=1TO4:PRINT@384,"SCREEN SAVED":SOUND1,5:PRINT@384,"":SOUND50,5:NEXT:GOTO
1000
750 IFT$="L"THEN:PMODE2,1:SCREEN1,1:COLOR CB,CA:CLOADMF$:GOTO15
799 REM START ROUTINE
800 CLS0:PRINT@32,"artext":PRINT"THIS PROGRAM ALLOWS YOU TO","USE MIXED TEXT AND
GRAPHICS","ON THE HIGH-RESOLUTION SCREEN","FOR INSTRUCTIONS ENTER 'I'",,,"OTHE
RWISE PRESS 'RETURN'","TO CONTINUE",,,,,,,,"COPYRIGHT K A S BRAIN 051282":PRINT@38
4,"":INSTN1
810 INPUTD$:IFD$="I"THENGOSUB1100
820 CLS3:PRINT"  hi-res modes":PRINT@97,"0 = 128 X 96  ( ","CHR$(128);" ) TWO CO
LOUR":PRINT@161,"1 = 128 X 96  ( ","CHR$(128);" ) FOUR COLOUR":PRINT@225,"2 = 192
X 128 ( ","CHR$(138);" ) TWO COLOUR":PRINT@289,"3 = 192 X 128 ( ","CHR$(138);" )
FOUR COLOUR"
825 PRINT@321,"4 = 256 X 192 ( ","CHR$(142);" ) TWO COLOUR":PRINT@455,"resolut
ion (x4)(y4)?0":
830 INPUTZ:IFZ>4THENPRINT@450,"INVALID REQUEST":GOTO830
840 IFZ=0ORZ=2ORZ=4THEN1020
900 CLS:PRINT"FOUR COLOUR MODE","COLOUR SET 1","1 = ","CHR$(143);" GREEN","2
= ","CHR$(159);" YELLOW","3 = ","CHR$(175);" BLUE","4 = ","CHR$(191);" RED"
910 PRINT,,,"COLOUR SET 2",,,,"5 = ","CHR$(207);" BUFF","6 = ","CHR$(223);" CYAN
","7 = ","CHR$(239);" MAGENTA","8 = ","CHR$(255);" ORANGE"
920 PRINT@416,"BACKGROUND COLOUR":INPUTCA#:PRINT"FOREGROUND COLOUR":INPUTCB$
930 CA=VAL(CA#):CB=VAL(CB$):IFABS(CA-CB)>3ORCA=0ORCB=0THENPRINT@480,"invalid com
bination":GOTO920
940 IFCA<5THEST=0ELSEST=1
950 CC$="C"+STR$(Y)
999 REM HI-RES SCREEN SET UP
1000 PMODE2,1:SCREEN1,Y:COLOR CB,CA:IFST=1THENPCLS:ST=0
1009 REM SET VARIABLES
1010 CA#="C"+CA#:CB$="C"+CB$:PG$="12244":PG=VAL(LEFT$(PG$,Z+1,1)):B$="ICUDLREFGHS
XP0123456789":S=4:D#="0":DRAW"S4BM18,18":GOTO15
1020 CLS:PRINT"TWO COLOUR MODE",,,,,"COLOUR SET 1",,,,"0 = ","CHR$(128);" BLACK"
,"1 = ","CHR$(143);" GREEN"
1030 PRINT,,,"COLOUR SET 2",,,,"0 = ","CHR$(128);" BLACK","5 = ","CHR$(207);" BUF
F"
1040 PRINT@416,"BACKGROUND COLOUR":INPUTCA#:PRINT"FOREGROUND COLOUR":INPUTCB$
1050 CA=VAL(CA#):CB=VAL(CB$):IFCA<0ORCA>5ANDCB=0THEN1000
1060 IFCB=10RCB=5ANDCA=0THEN1000
1070 PRINT@480,"invalid combination":GOTO1040
1080 IFCA=1ORCB=1THEN1=0:CC$="C"+CB$:GOTO1000
1090 Y=1:CC$="C"+CB$:GOTO1000
1099 REM INSTRUCTIONS
1100 CLS:PRINT"instructions":PRINT@64,"IN MODE A A SMALL CURSOR APPEARS","TO MO
VE PRESS 'U,D,L,R' & 'S' NUM","TO INCREASE SCALE PRESS 'E'","TO RESET SCALE PR
ESS '-'","TO CHANGE TO NEW DRAW COLOUR","PRESS APPROPRIATE NUMBER KEY":GOSUB12
00
1110 PRINT"MODE A",,,,"TO ERASE DRAW WITH THE 'BACKGROUND COLOUR',,,"FOR INSTRU
CTIONS PRESS 'I'",,,"TO ENTER MODE B PRESS 'Q'",,,"TO PRINT PRESS 'P'",,,"TO CLE
AR SCREEN PRESS 'C'":GOSUB1200
1120 PRINT"IN MODE B CURSOR IS LARGER","TO MOVE USE CURSOR (ARROW) KEYS",,,"TO
WRITE PRESS APPROPRIATE KEY",,,"TO CHANGE ANGLE OF WRITING PRESSENTER AND THEN
NUMBER (0-3)",,,"TO CHANGE OTHER PARAMETERS PRESS@ AND RETURN TO MODE A":GOSUB12
00
1130 PRINT"MODE B",,,,"TO CLEAR SCREEN PRESS CLEAR",,,"PRESS @ TO RETURN TO MODE
A",,,,"PRESS A IN MODE A FOR LOAD SAVE  ROUTINE":GOSUB1200:RETURN
1200 PRINT@480,"PRESS ENTER TO CONTINUE":INPUT:CLS:RETURN
```

EXPLORING SPECTRUM BASIC £4.95 An ideal complement to the Sinclair manual. Over 50 games, application & utility programs plus explanations of programming techniques. Mike Lord. 192 pages.

THE EXPLORERS GUIDE TO THE ZX81 £4.95 The book for the ZX81 enthusiast, now in edition 2 with 152 pages of games, engineering & utility programs plus much useful information on machine language and hardware. Mike Lord.

WAKE UP YOUR ATOM £4.95 20 great programs to make the most of your Atom; including the colour board (old or new type) if fitted. Plus copious programming tips. Brian Lloyd.

THE ATOM MAGIC BOOK £5.50 A wealth of games and other programs plus much useful software and hardware information. Mike Lord.

Also available:

MASTERING MACHINE CODE ON YOUR ZX81 Toni Baker 180 pages £7.50
GETTING ACQUAINTED WITH YOUR ZX81 Tim Hartnell £4.95
GETTING ACQUAINTED WITH YOUR ACORN ATOM Tim Hartnell & Trevor Sharples £7.95
PRACTICAL PROGRAMS FOR THE BBC COMPUTER & ACORN ATOM D Johnson-Davies £5.95
WHAT CAN I DO WITH 1K? Roger Valentine £4.95
ATOM RAM BOARDS S.A.E. for details.
ATOM ROAM BOARDS £35.00 inclusive Software switch between 3 utility ROMs and 4K RAM (fitted) to load your own 'utilities' from tape or disc.

All prices include U.K. P&P and VAT where applicable. Overseas customers add £1.50 per item for surface mail.

TIMEDATA Ltd. Dept A
16 Hemmells, Laindon, Basildon, Essex Tel: (0268) 418121

VISA

TIMEDATA

SINCLAIR COMPUTERS

UK prices are shown first. The bracketed prices are export prices which include insured air-mail postage to all the countries of Europe including Norway, Sweden, Finland and Denmark. For overseas customers outside Europe an extra £5 postage per item is charged.

zx81 £43.43 (52). zx printer £52.13 (61). zx spectrum 16K £152 (160). zx spectrum 48K £202 (£210). zx microdrive n/a (n/a). 5 printer rolls £10.43 (16).
Ram packs:– 16K £26.04 (£28). 32K £39 (41). 56K £49 (51).

DRAGON 32 £173

COMMODORE COMPUTERS

Commodore 64 £299. Vic 20 £130. Kit to allow the use of an ordinary mono cassette recorder with the Vic 20 and the Commodore 64 £6. Commodore cassette recorder for these computers £36.50. Super expander high resolution cartridge £27.95. We stock most accessories.

BBC MICROCOMPUTERS

A Model £260. B Model £347.

GENIE COMPUTERS

New colour Genie £173.50, 16K ram card £44. Light pen £15. Accessories for Genie 1 and genie 2:– EG3014 32K £189. Disc drives single £199, dual £389. Double density convertor £72. High resolution graphics £82. Printer interface £36.

UK101 AND SUPERBOARD

32 × 48 display expansion kits UK101 £9, Series 1 Superboard £14. 32K memory expansion board £60. Cegmon £22.50. Word processor prog £10. Centronics interface kit £10. Cased disc drives with DOS single £275, double £415. Stand alone floppy disc controller £85.

PRINTERS

Buy any of the below and get a free interface kit and word processor program for UK101 or Superboard. Epson MX80FT3 £324. Epson MX100/3 £425. Seikosha GP100A £189. OKI Microline 82A £199. OKI Microline 92A £333. OKI Microline 83A £446. OKI Microline 84 £666. OKI Microline 92 £429. OKI Microline 93 £586.

5V POWER KITS

Fully stabilized 5V computer and TTL power kits. 1.5A £7.83, 3A £12.17, 6A £20.87.

SHARP COMPUTERS

We can supply Epson MX80 and MX100 printers to run direct from the MZ80K (i/o box not needed) for £39 plus printer price. We also specialize in interfacing printers to the MZ80K, MZ80A and MZ80B both with and without the i/o box.

SWANLEY ELECTRONICS
Dept YC, 32 Goldsel Rd., Swanley, Kent BR8 8EZ.
Tel Swanley (0322) 64851

Postage £1 on Sinclair products (UK), £3.50 on other computers, £4.50 on printers and 50p on other orders. Please add VAT to all prices. Official credit and overseas orders welcome.

MEMORY DEVICES FROM:

GCC ELECTRONICS

Tel: 0223 835330 **Telex: 817672**

EPROMS		6500 Family		MEMORIES	
2708	200p	6502	375p	2114LP-2	90p
2716+5V	200p	6520	285p	2114-450	85p
2732	395p	6522	375p	4116-150	90p
2532	365p	6532	520p	4116-200	88p
2764	6.80p	6545-1	900p	4816-2+5V	250p
				4164-200	410p
6800 Family		Z80 Family		6116-150	350p
6800	270p	CPU	315p	5516-250	635p
6802	325p	ACPU	350p		
6810	110p	CTC	270p		
6809	850p	ACTC	290p		
6850	135p	PIO	340p		
6821	110p	APIO	350p		

We supply 74LS TTLs, CMOS 4000 Diodes. Transistors, etc., etc. All components are guaranteed prime parts, from leading manufacturers.

Orders from Government, Educational and Overseas buyers welcome. Special prices for volume enquiries. Please add £1 post and packing plus VAT at 15%. Minimum order £15.00.

GCC ELECTRONICS
66 HIGH STREET, SAWSTON
CAMBRIDGE DB2 4BG
TEL: 0223 835330 **TELEX: 817672**

*SPECTRUM MONITOR *SPECTRUM EDITOR/ ASSEMBLER *ZX81 SCREEN KIT 1 *ZX81 ZX-MC *ZX81 REMLOAD

FAST MAIL ORDER-SEND TODAY!

SPECTRUM MONITOR. Machine Code Debug/Disassembler
• Enter, Run, Debug machine code programs • Compatible with Basic • Breakpoints and Registers Display • Disassembly to screen and/or ZX Printer • 16K and 48K versions on one cassette • 30 page manual. **£7.50**

SPECTRUM EDITOR/ASSEMBLER. A powerful and essential machine code programming aid. Major features include:
EDITOR with Auto Line Numbering; 40 Column screen display, tabulated into fields for easy reading; 5 character Label Names; simple Line Editing and Cursor Control; SAVE/LOAD Text Buffer to cassette; output to ZX PRINTER.
TWO-PASS ASSEMBLER accepts all Z80 mnemonics (plus many unpublished mnemonics): Decimal or Hex numbers; simple arithmetic on operands; Assembler Directives – ORG, END, DEFB, DEFW, DEFS, DEFL, EQU, DEFM.
WE CANNOT FULLY DESCRIBE THIS IMPORTANT UTILITY HERE, AND ASK YOU TO SEND A S.A.E. FOR COMPLETE DETAILS OF THIS AND ALL OUR PROGRAMS. **£8.50**

ZX81 SCREEN KIT 1. More power to your screen in all your Basic programs
BORDERS any size, anywhere on screen. SCROLL in all 4 directions – CLEAR and REVERSE PART OF SCREEN. FLASHING CURSOR anywhere on screen – simulates INPUT. DATA FILES SAVE AND LOAD Basic variables. Double Speed. 880 bytes machine code for INSTANT RESPONSE. Becomes part of Basic Program. **£5.70** 4K to 64K

ZX81 ZX-MC. Machine Code Debug/Monitor
• ENTER, RUN, DEBUG machine code programs • SAVE, LOAD, VERIFY at double speed • BREAKPOINTS and REGISTERS DISPLAY • Self contained – cannot be used with Basic • Cassette plus 36 page manual. **£7.50** 4K to 64K

ZX81 REMLOAD. Machine Code Debug/Monitor
• A version of ZX-MC without the Save/Load/Verify facility • Compatible with Basic • CREATE A REM LINE of any length • BREAKPOINTS and REGISTERS DISPLAY • Cassette plus 30 page manual. **£6.95** 16K to 64K

SEND S.A.E. NOW FOR DETAILS
6 Corkscrew Hill, West Wickham, Kent BR4 9BB.

PICTURESQUE PICTURESQUE PICTURESQUE PICTURESQUE

Prices include VAT & P&P

LOW PRICES ... NEW LOW PRICES ... NEW LOW PRICES ... NEW LOW PRICES ... NEW LOW PRICES ... NEW LOW PRICES ... NEW LOW PRICES ... NEW LOW PRICES ... NEW LOW PRICES ... NEW LOW PRICES ...

EXTREMELY Addictive Games

NOW! for the SPECTRUM FOOTBALL MANAGER IN 3D

COLOUR GRAPHICS

ACTION FROM THE SPECTRUM VERSION

FEATURES INCLUDE.....

★ 4 DIVISIONS ★ F.A. CUP ★ PROMOTION & RELEGATION ★ TRANSFER MARKET ★ TEAM SELECTION ★ SAVE GAME FACILITY ★ LEAGUE TABLE ★ AND MUCH MORE!

ALSO AVAILABLE AT BOOKSTORES & COMPUTER SHOPS INCLUDING BUFFER, MICRO SHOP, LONDON & MICROWARE, LEICESTER. 3D GRAPHICS ONLY INCLUDED IN SPECTRUM VERSION

NEW LOW PRICES

£7.95 ALL PRICES FULLY INCLUSIVE

£6.95 - SPECTRUM

£5.95 - ZX81

HARDWARE REQUIRED
Spectrum 48K RAM ZX81 16K RAM

To Order send Cheque/P.O. payable to:
ADDICTIVE GAMES
at: Dept. Y.C. P.O. Box 278
CONNIBURROW,
MILTON KEYNES, MK14 7NE
PLEASE STATE COMPUTER

We're tired of telling you how good our game is..... let our customers tell you

Dear Sir,
I received a copy of your Football Manager, Spectrum 48K game a couple of weeks ago and felt I must just write and congratulate you on such an "addictive game".
I started on the beginners skill level with Ipswich Town in the Fourth Division. After having played six seasons I am now into the first division having won the F.A. Cup whilst in the second division. All of which took about nine hours of being glued to the screen.
Since reaching the first division I have increased my skill level and am now sixth in the table after ten seasons and about 15 hours!
The reason I am suprised that I have played this game more than any other in my library over the last two weeks, is because I don't really like watching football on television. I don't even support a team. The structure of your game is such that anyone can play it.
P. A. HACKMAN,
BURY ST. EDMUNDS

ORIGINALS CAN BE SEEN ON REQUEST

The Working Spectrum

(228 page book)
The first well-documented collection of serious programs for the ZX Spectrum. Programs include a Basic Renumber which can handle Gotos and Gosubs, a character dictionary, a file-handler, several utility programs and a few games. Each program is built up out of re-usable subroutines.

£5.95

The Working Dragon 32

This is a companion volume to The Working Spectrum and includes several new features such as a Text Editor and a Music Composer and Editor. Other programs help you use the Dragon 32 as an accountant, for more advanced high resolution graphics, as a home tutor for education and for playing games. Each of the programs and subroutines is explained line by line to help develop your own programming skills.

£5.95

Best of Popular Computing Weekly

Cassette
Four of the top Spectrum and ZX81 games from Popular Computing Weekly are recorded on this one cassette. The games are Laserchase for the 16K & 48K Spectrum, Kong's Revenge for the 16K & 48K Spectrum, Robot Control for the 16K ZX81 and Alien Attack, a Space Invaders type game for the 1K ZX81.

£4.45

Cruising (on Broadway)

cassette
Play Cruising, a new, fast, machine code game of skill for the 16K or 48K ZX Spectrum computer. You won't be able to beat it – the more you practice the faster it gets. Cash prizes are being offered for the highest recorded scores. See Popular Computing Weekly every Thursday for details.

£4.95

Please send me
Qty:
- ☐ **The Working Spectrum** at £5.95 each
- ☐ **The Working Dragon 32** at £5.95 each
- ☐ **Best of Popular Computing Weekly** at £4.45 each
- ☐ **Cruising (on Broadway)** at £4.95 each

I enclose a cheque/ postal order for

£

payable to

Sunshine Books Ltd.
19 Whitcomb Street,
London WC2 7HF

Name

Address

Signed

We can normally deliver in four to five days.

A New Range From Sunshine Books Ltd

MICROWARE ANNOUNCE THE Z/ L RANGE OF FLOPPY DISC SUB SYSTEMS



The Control Data Family of Flexible Disk Drive is a single- or double-sided, random-access, low-cost storage device. Maximum storage capacity 1 megabyte on a 133.4-millimetre (5.25-inch) interchangeable disk. This disk drive is interchangeable with comparable products, providing industry compatibility in size, mechanical mountings, electrical interface, power requirements and physical appearance. CDC® FDD operates in single- or double-density formats. Single-density operation is achieved by using Frequency Modulation (FM) encoding, and in double-density operation uses Modified Frequency Modulation (MFM).

OPERATIONAL CHARACTERISTICS

	9408	9409	9409T
Capacity			
Unformatted			
Per disk	250.0 kbytes	500.0 kbytes	1 megabyte
Per track	3.1 kbytes	6.2 kbytes	6.2 kbytes
Formatted (16 sectors, 128/256 bytes)			
Per disk	163.84 kbytes	327.68 kbytes	655.36 kbytes
Per track	2.1 kbytes	4.1 kbytes	4.1 kbytes
Code	MFM	MFM	MFM
Transfer Rate	125 kbits/s	250 kbits/s	250 kbits/s
Average latency	less than 100 ms	less than 100 ms	less than 100 ms
Seek Time			
Track to track	less than 5 ms	less than 5 ms	less than 5 ms
Average Access	less than 80 ms	less than 80 ms	less than 132 ms
Setting time	less than 15 ms	less than 15 ms	less than 15 ms
Head Load Time (OPT)	less than 50 ms	less than 50 ms	less than 50 ms
Media	hard/soft sector	hard/soft sector	hard/soft sector

Rotational Speed	300 r/min	300 r/min
Track Density	48 TPI	96 TPI
Flux Reversal Density (track 39, side 1)	5876 FRI	5922 FRI
Number of Tracks	40	80

Inner recorded radius (side 0)	1.437 in (36.50 mm)	1.385 in (35.2 mm)
Outer recorded radius (side 0)	2.250 in (57.2 mm)	2.250 in (57.2 mm)
Inner recorded radius (side 1)	1.354 in (39.39 mm)	1.344 in (34.1 mm)
Outer recorded radius (side 1)	2.167 in (55.0 mm)	2.167 in (55.0 mm)

THE Z/ L RANGE

Type	Capacity	Tracks	No. of Drives
ZL141	250 k	40	1
ZL142	500 k	40	2
ZL241	500 K	80	1
ZL242	1 Mb	80	2
ZL291	1 Mb	160	1
ZL292	2 Mb	160	2

Microware Disk Drive Subsystems are plug compatible with the following: –
TANDY, VIDEO GENIE, BBC MODEL B, NABCOM, SUPER BRAIN, IBM/PC. and many more.

Microware also supply floppy drives, Winchesters and sub systems to OEM's and the trade at very aggressive prices, offering the best price performance ratio available. Call and ask for details.

CABINETS AND PSU

Cabinets of steel, aluminium or plastic are available in a choice of colours, and each unit is fully guaranteed.

AC 8151 40 WATT SERIES

The AC 8151 Switch-Mode Power Supply has been designed for use in small terminals and other similar equipment. The AC 8151 has dual line inputs and regulated outputs of: +5V at 2.5A, +12V at 2.0A, –12V at 0.1A. This compact unit features low magnetic radiation and is built to conform to International Safety and RFI Regulations.

Microware (London) Ltd.,
637a Holloway Road, London N19 5SS.
Telephone 272 6398/6237

TRANSFORM LTD.

ZX Business Software.

FOR SMALL BUSINESSES AND THE SELFEMPLOYED

Business Bank Account 1: this program enables you to make debits under 11 subheadings. Statements include totals of all sub-headings. **£8.75**

Business Bank Account 2: with 15 subheadings and standing orders. **£10.75**

Sales Day Book 1: for all your invoices, this program will enable you to prepare statements of outstanding invoices. Program will also calculate VAT. **£8.75**

Sales Day Book 2: with many extra facilities including totals of past 12 periods. **£10.75**

Sales Cash Book: for retailers program calculates VAT and denotes method of payment. **£8.75**

Purchase Day Book 1: keeps a complete record of all your purchases under 11 subheadings. The program will also calculate and deduct VAT. **£8.75**

Purchase Day Book 2: with many extra facilities including totals of past 12 periods. **£10.75**

Quarterly Analysis: quarterly totals from Bank Account, Purchase and Sales programs can be analysed with this program. **£4.75**

● All the programs have full search facilities ●

Business Pack 1: incl. Bank Account 1, Sales 1, Purchase 1 and quarterly analysis programs **£25.00**

Business Pack 2: incl. all 4 programs **£30.00**

Please specify memory size when ordering for your ZX81 or ZX spectrum.

ALL PRICES include VAT post & packaging for details send SAE to

TRANSFORM LTD
41 Keats Ho Porchester Mead Beckenham, Kent.
Tel: 01-668 1661.

★★ **NEW FROM CAMEL PRODUCTS** ★★

AN INNOVATIVE PRODUCT FOR YOUR ZX81

Faster than a Floppy
Easier than an EPROM

MEMIC-81

HOW IT WORKS & WHAT IT DOES

This useful accessory for ZX81 users is a 4 kilobye memory module using chips fabricated in a remarkable technology. When not actually in use, these CMOS chips can be put into standby. The Lithium battery fitted in the unit will last for 5 to 10 years. Plug it into the ZX81 and flick a switch and the data is ready for retrieval.

MEMIC-81 resides in the 8-12K area of ZX81's memory map. This area is not directly addressed by Basic, but Basic programs can easily be stored and retrieved by mearis of the tiny 12 byte routine provided. This can itself be stored in CMOS, so that Basic programs become available simply by entering PRINT USR . . . Machine Code routines are directly accessible.
Clear User Notes, Application Notes, Program Example and the necessary routines are provided with MEMIC-81, which comes cased and with an extender card at the back.
For a picture of MEMIC-81, see Sept Y.C. page 122.
4kB MEMIC-81 £29.95 + VAT

OTHER CAMEL PRODUCTS

MEMIC T	2 kB Towerblock version for any System	£26.04
MEMIC L	2 kB Low Profile version with cabled connector	£26.04
PIO-81	8+8 Ch. latched Input/Output ZX81 card	£13.00
ROM-81	2 kB-8 kB ROM/EPROM Unit for ZX81	£14.95
CRAMIC-81	16K CMOS Rampack with Lith battery	£79.95
DREAM-81	64K Rampack with 16K ROM socket	£69.95

UK VAT Extra
P&P UK Free – Europe + 5% – Overseas + 10%

Cambridge Microelectronics Ltd., One Milton Rd., Cambridge CB4 1UY Tel (0223) 314814

SPECTRUM TOOL KIT

Bobby Rao offers some handy hints to would-be machine-code users. Here are some useful off-the-peg routines.

HERE ARE ABOUT 20 machine-code graphics routines, any combination of which may be used in your programs to enhance the screen displays, or to give them that extra touch of elegance that comes only from the use of machine code. Also included are renumber and memory-left routines which may be used to aid your programming.

No understanding of machine code is necessary to use the routines — just a good working knowledge of the Spectrum and its manual. Machine code is the computer's first language — it only speaks Basic out of courtesy to humans — and its use results in greater speed, flexibility and more economical use of memory than does the use of Basic.

To get the machine code into the computer a hex loader must be used — see program 1. Type this in and Save it. Machine code can either be stored above RAMtop or in a Rem statement at the beginning of a program. I prefer the latter method, for each different routine may be stored in a Rem statement with a different line number and then Merged into a program as required. However, if you wish to use the first method then change line 5 as shown underneath the program listing.

Here is an example of how you go about loading in the memory-left routine, see figure 1. Firstly Load in the hex loader and type in a Rem statement as line 1. This Rem statement should consist of 14 full stops because the memory-left routine is 14 bytes — characters — long. If you are using the RAMtop method then you will not need to do this — just Clear yourself enough memory space above RAMtop. Now carefully type in the Data line in figure 1 and after checking this line Run the program. Listing it will show that line 1 is now a meaningless jumble — if you have a line 1, that is — but do not worry, for this is supposed to happen. Also it is likely that Listing the program when the Rem line is in this state will cause the computer to stop with an error report. To avoid this and view the rest of the program you must always use List — line number of first line after Rem line — so that the Spectrum does not try to List the unlistable Rem line.

Now the routine is ready to be Saved. Erase all of the hex loader except the Rem line — do not use New whatever you do — and Save this with a filename like "Mem Left". Now New the computer and reload the hex loader. Repeat the above process for the rest of the routines, but make sure you never use the same Rem line number for two different routines because this will cause trouble when you come to Merging routines together.

RAMtop-method users may Save their routines by using the Save filename Code method detailed in the manual on pages 143 and 180.

Once the tedious task of typing in and Saving the routines has been accomplished you are ready to use the routines. If you wish to use some of the routines in one of your programs then start that program at, for example, line 100, leaving the earlier line numbers free for the machine-code Rem lines. After typing in the program, Merge in the routines you require. To run machine code rather than Basic the Usr function must be used.

The argument of this function is the address of the first byte of the machine-code routine you want to run, and this may be found, if you are using the Rem method, by using program 2. On running this program — whilst the machine-code routines are in the computer — line numbers and the start addresses of the routines in those lines are printed until the computer finds a non-Rem line when it will Stop. Note these start addresses down, or better still, define variables equal to these values by placing a lot of Let statements somewhere in your program, for example:

```
LET INV=23760
```

Now just typing Print Inv will tell you the address of the first byte of the invert-screen routine.

RAMtop method users will not need to use program 2 because they will already know the addresses of their routines or they would not have been able to get them above RAMtop in the first place.

To use the routines use the command Randomise OX USR X, where X is the address of the routine you are using. The result of the Usr function is multipled by 0 to keep Rnd truly random, that is, it acts like a Randomise O command.

Below there is a description of all the routines and how to use them. In these descriptions the variable X stands for the address of the first byte of the routine in question. All numbers are in decimal and unless otherwise stated all the screen routines operate on all 24 lines of the screen.

Where you are told to Poke something somewhere the Pokes must be done before you use the routines and they may be entered as a series of direct commands before you Run the program or they may be built into the program.

Memory Left: running this, listing 1, using Print Usr X will tell you the exact number of free bytes of memory you have left.

Hi-Res Up Scroll: this, listing 2, routine scrolls the screen up by one high-res pixel, replacing the bottom line of pixels with blanks.

Hi-Res Down Scroll: as in listing 2, but this — listing 3 — scrolls down, blanking the top line of pixels.

Hi-Res Left Scroll: this scrolls the screen left one pixel, replacing the rightmost column of pixels with blanks. See listing 4.

Hi-Res Right Scroll: as in listing 4, but listing scrolls right, blanking the leftmost column of pixels.

One Character Left Scroll: the listing 6 routine scrolls the screen left one character, replacing the rightmost column with either blanks — for this effect Poke X+16,54 — or the previous leftmost column — a wrap-around effect for this Poke X+16,119.

One Character Right Scroll: the listing 7 routine scrolls right. Poke X+16,54 causes the leftmost column to be blanked and Poke X+16,119 replaces this column with the previous rightmost column.

These last two routines are adjustable in which part of the screen they scroll but you only have five options. The table below tells you how to adjust the routines. The first column tells you which part of the screen is to be scrolled. The next two columns tell you what to Poke in X+I and in X+4 respectively for the left scroll routine. The last two columns tell you what to Poke in X+1 and X+4 respectively for the right scroll routine.

Top one-third	64	64	64	71
Middle one-third	64	72	64	79
Bottom one-third	64	80	64	87
Top two-thirds	128	64	128	79
Bottom two-thirds	128	72	128	87

Invert Screen: the listing 8 routine inverts the actual pixels on the screen, that is, all pixels on are turned off and all pixels off are turned on and so it is different from the Inverse function on the Spectrum which only

(continued on page 81)

dk'tronics

ZX KEYBOARD FOR USE WITH 80/81 SPECTRUM

Our new cased keyboard has 52 keys, 12 of these are used for the numeric pad. The numeric pad offers some useful features, you can cursor with one hand and it will be a boon for anyone who enters a lot of numeric data. The pad is a repeat of the 1-9 keys plus it has a full stop and a shift key. The numeric pad keys are coloured in red, the normal keyboard keys are grey, with the case being black which makes the whole thing very attractive. The case measures 15 × 9 × 2½. The computer (either 80/81 or spectrum) fits neatly inside. You will have to remove the computer from its original case, it is then screwed to the base of the case. The case had all the bosses already fitted and the screw holes are marked. Also fitted inside the case is a mother board (81 model only) which allows 16K, 32K and 64K to be fitted in the case. All the connections are at the rear of the case i.e. Power, Mic, Ear, T.V. and the expansion port. The case is large enough for other add ons also to be fitted inside. One of these could be the power supply, then you could very quickly fit a mains switch, or a switch on the 9V line. This means you have a very smart self-contained unit. This case does not stop you from using any other add-ons that you may have e.g. Printer etc. We are convinced that this is the best keyboard available at present. It offers more keys and features than any other keyboard in its price range.

NOTE

The case can be purchased separately with the keyboard aperture uncut, so if you have one of our early uncased keyboards, or in fact any other suppliers' keyboards, these could be fitted. The keyboard is connected to your computer by a ribbon cable and this has connectors fitted which simply push into the Sinclair connectors. It is a simple two minute job and requires no electronic skills. This keyboard does not need any soldering. Please specify on order whether you require the ZX 81 or Spectrum case.

SPECTRUM MODEL

This is supplied with spectrum legends, and a slightly different base for fitting the spectrum inside, again all the connectors are at the rear of the case and there is plenty of room for the power supply (and other add-ons). Should you want to change, we can supply both the Spectrum legends and details of updating your case which will enable modification from the ZX 81 to spectrum. PLEASE specify on your order whether you require the ZX 81 or spectrum case.

KEYBOARD (SPECTRUM/81) **£45**

Internal fixing for ZX 81 keyboard case.



Internal fixing for spectrum keyboard case.



SPECTRUM LIGHT PEN

The pen enables you to produce high resolution drawings on your own television set, saving a vast amount of time over using basic programming statements, such as Plot, Draw etc. You can erase, modify and save drawings and it comes complete with software program. The superb light pen is available from DK Tronics at only **£19.95**

ZX 80~81 Spectrum HARDWARE

4K TOOLKIT

This is the toolkit which won acclaim in the feature in the August 1982 issue (pages 29 and 30) of Sinclair User. "It is the most impressive program, fast in execution with clear and full instructions...it stands out from the rest of the field." The ZXED is a powerful editor for use on the expanded ZX81. It is intended for use by the serious BASIC programmer and offers several useful and time saving features most helpful during all stages of program development. The facilities provided are as follows: ALTER, BYTES, COPY, DELETE, FIND, HELP, INSERT, KEEP, MOVE, RENUMBER AND VERIFY. The Spectrum Toolkit contains most of the features above plus autoline numberer and append, and will run in the 16K and 48K spectrum.



Both at only £6.95

4K GRAPHICS ROM £24.95

The DK Graphic module is our latest ZX 81 accessory. This module unlike most other accessories fits neatly inside your computer under the keyboard. The module comes ready built, fully tested and complete with a 4K graphic ROM. This will give you an unbelievable 448 extra pre-programmed graphics, your normal graphic set contains only 64. This means that you now have 512 graphics and with their inverse 1024. This now turns the 81 into a very powerful computer with a graphic set rarely found on larger more expensive machines. In the ROM are lower case letters, bombs, bullets, rockets, tanks, a complete set of invaders graphics and that only accounts for about 50 of them, there are still about 400 left (that may give you an idea as to the scope of the new ROM). However, the module does not finish there, it also has a spare holder on the board which will accept a further 4K of ROM/RAM. This holder can be fitted with a 1K/2K/RAM and can be used for user definable graphics so you can create your own custom character sets.

WHY WAIT?
ORDER TODAY FOR FAST DELIVERY

FLEXIBLE RIBBON CONNECTOR

If you have ever had whiteouts or system crashes this could be the answer. It stops the movement between the computer and the RAM expansion. it is supplied with a ribbon, 6 inches long, with a male connector at one end and a female at the other, at only

£10

16/64 MEMORY FOR ZX 81

The above illustration shows the casing for the 16K or massive 64K.

MEMORY

16K MEMORY EXPANSION £22.95

The 16K used 4116 Dynamic Ram Chips. We use the dynamic because they are much denser than static ram and occupy less space. They are also much cheaper than the equivalent product using the static Ram. The Ram is manufactured with high quality materials and uses high speed low power Rams. It is supplied ready-built and only needs to be plugged into the rear of the computer. All the components are fitted into holders. This massive add on memory which comes to you fully assembled and tested is the cheapest 16K memory available anywhere. Position in memory from 163834 to 32768 (same as the Sinclair Memory). **16K (UNCASED) £19.95**

64K MEMORY EXPANSION £52.95

All the above information on the 16K also applies to the 64K Memory Expansion, but the advantage lies in the 64K giving nearly four times the memory. This advanced model has 56K of usable memory. In addition, the block from 8K to 16K can be switched out to enable the use of other add-ons. The graphics Rom is to be used in this area. Position in Memory: 8192-65536. The block from 81342-16384 is switchable. **64K (UNCASED) £49.95**

Please state type of machine, which Rom memory size, quantity and place when ordering.

Please send me ..... @ £.....

Please send me ..... @ £.....

Please send me ..... @ £.....

Please add on £1.25 for P/P

In enclose cheque/P.O. payable to DK Tronics total £ .....

or debit my Access/Barclaycard ☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐

Signature .....

Name .....

Address .....

.....

Send to DK Tronics, 23 Sussex Road, Gorleston, Gt. Yarmouth, Norfolk.
Tel: Gt. Yarmouth (0493) 602453

dk'tronics

New colour brochure now available, send SAE for quick return

MICROWARE — UNIT 5, ST. PETERS LANE, LEICESTER. Tel: 0533 29023
(Close to Clock Tower, Large Car Parks and Bus Station)

THE "FRIENDLY TO USER STORE" THE FIRST MIDLANDS REGION RETAIL SHOP SPECIALISING IN SINCLAIR COMPUTER ACCESSORIES

ZX81 (NOW IN STOCK) £49.95
JUPITER ACE (NOW IN STOCK £89.95
ORIC (AVAILABLE END JAN)
SPECTRUM (COMING SOON)

ALSO SUPPORTING SOFTWARE AND HARDWARE

Come and see our ever increasing range of Software . Hardware . Books . Magazines . Keyboards . Ram Packs . Graphic Roms . I/O Ports . etc.

BOOKS AND GOOD RANGE OF SOFTWARE FOR BBC & DRAGON 32

IF THE PRODUCT IS GOOD AND THE PRICE IS RIGHT — THEN MICROWARE STOCK IT!

QUALITY JOYSTICKS FOR DRAGON & BBC £9.99 EA.
VINYL DUSTCOVERS FOR DRAGON & BBC £4.50

MICROWARE SPECTRUM SOFTWARE

ALIEN COMMAND (16K) Testing Invaders style game making full use of Spectrum sound, colour and graphics NOW £4.75 ONLY
BACKGAMMON (16K) Play against your computer in this version of the popular board game £5.00

BOTH GAMES AVAILABLE FROM SHOP OR MAIL ORDER

SOFTWARE WRITERS!
GOOD SOFTWARE WANTED — EXCELLENT ROYALTIES

PRINTER FOR DRAGON, BBC,ETC £150

TRADE ENQUIRIES WELCOME OPEN 9.30-12 noon 12.30-5.30 pm SAE BRINGS CATALOGUE
Closed Monday

MICROWARE Leicester

CABEL electronic

CABEL ELECTRONICS LTD., MOUNT ROAD, BURNTWOOD, WALSALL, STAFFS WS7 0AX Tel: 021 308 7075 TLX: 339671

MC 370M R.G.B. COLOUR MONITOR

14" Colour Monitor with a full 2 year guarantee, moulded in a stylish cabinet to match your computer.

The Advantages of Pure R.G.B.

- 80 × 25 Charictor display
- Crisp definition on colour graphics
- Degaussing facilities
- Permanent link to your computer
- 3 × the band width of your normal TV

CABEL ELECTRONICS LTD., are manufacturers of a complete range of colour and monochrome monitors with 10 years of experience within the television industry, our 2 year guarantee proves our faith in our products.

REC. RETAIL PRICE £289.00 inc. VAT & Postage

See us at the Which Computer Show stand No. V23

Ring us for immediate delivery, most major credit cards accepted.

(continued from page 77)

inverts the Ink and Paper colours — which this routine does not alter.

Screen Fill: this routine, listing 9, fills in a box of height a, width b, and a top left-hand corner at a point c,d — where c and d are co-ordinates used by the Print At system — with any character of your choice.

POKE X+1, character-code POKE X+3,a
POKE X+4,c POKE X+6,b POKE X+7,d

So if a=22, b=32,c=0, and d=0 then the normal 22-line screen is filled. You must have Printed something somewhere before using this routine or it will not work properly. Also note that you cannot Print on line 24 with this routine.

Ink Change: this — see listing 10 — changes the Ink colour of the screen without altering anything else. Poke X+1, the number of the colour you want to change the Ink to.

Paper Change: as listing 10 but changes the Paper colour. Poke X+1, the number of the colour you want to change the Paper to. See listing 11.

Flash On-Off: this routine, listing 12, sets the whole screen flashing — for this Poke X+9,254 — or returns the screen to normal non-flashing mode — for this Poke X+9,190.

Bright On/Off: the routine shown in listing 13 makes the whole screen bright — Poke X+9,246 — or returns it to normal brightness — Poke X+9, 182.

Attr Fill: the fourteenth listing changes the attributes for a box height a, width b and of top left-hand corner at a point c,d where c and d are co-ordinates used by the Print At system to denote a point on the screen.

POKE X+3,d POKE X+4,c POKE X+6,b
POKE X+7,a

Poke X+1, the value you want to change the attributes to. This value may be calculated thus: first assume the new Attr value is Y and initially Y=0. If Flash is on add 128 to Y, if off add 0. If bright is on add 64 to Y, if off add 0. Add eight times the number of the Paper colour to Y. Add the number of the Ink colour to Y.

This means that an attribute of flashing, bright blue Ink on yellow paper would be 128+64+(1×8)+6=206.

With this routine you can change the attributes of the whole 24-line screen.

Attr Up Scroll: this routine, listing 15, allows you to scroll up the attributes for a box height a, width b, and top left-hand corner at a point c,d. The bottom line of the box is replaced with an attribute of value Y — see Attr Fill for how to calculate Y

POKE X+1,n POKE X+3,d POKE X+4,c
POKE X+6,b POKE X+7,a

Attr Down Scroll: listing 16 scrolls down replacing the top line of the box with the new attribute. The Pokes are the same as for the previous routine.

Attr Left Scroll: as listing 16 but scrolls left replacing the rightmost column of the box with either a new attribute — for this Poke X+36,0 — or with what was previously in the leftmost column of the box — for this Poke X+36, 26 — This last effect, wrap-around, allows this routine to be used fully with the one character left scroll routine given above. See listing 17.

Attr Right Scroll: the routine shown in listing 18 scrolls right, replacing the leftmost column of the box with either a new attribute — for this Poke X+43, 0 — or with what was previously in the rightmost column of the box — for this Poke X+43, 26. This last effect allows this routine to be used fully with the one character right scroll given previously.

The next three routines allow you to store screens currently being displayed in spare memory and then recall them on to the display either making them swap memory position with the screen currently being displayed, or Overprinting them on to the current display. To store screens you must firstly Clear some memory space so you can store the screens there. each screen — with attributes — is 6,912 bytes long so this much space is required for each screen.

The memory location of RAMtop — the last byte of the computer's memory — can be found by using Print — Peek 23730+256 X Peek 23731. If this number is W then W-QX 6912 — where Q is the number of screens to be stored — will tell you the address to Clear RAMtop to — see manual page 168. You must have cleared this space or the routines will not function correctly.

If you only have 16K of memory then space exists for storing only one screen so Clear 25685 is all you need to use. In order that the routines know where in the memory a screen is to be fetched from or sent to you must do the following for all the routines:

POKE X+I, W-INT (W/256)
POKE X+2 INT (W/256)

If you have 48K and you wish to store more than one screen then it might be advisable to leave a gap of a few bytes in between screens so as to lower the risk of one screen running over on to another by accident.

If you are using the RAMtop method for storing the machine-code routines then be extra careful, or you will end up ruining the routines and crashing the computer. Make sure you take into account the length of the routines when deciding where you Clear RAMtop to.

Store Screen: this replaces the current display with one already in the memory. See listing 19.

Swap Screens: This routine swaps the current display with one higher up in the memory so that the screen that was being displayed is stored in the memory and the screen that was in the memory is now displayed. See listing 20.

Over Print Screens: This overprints a screen from higher up in the memory on to the current display. The old display is lost in its original form — it is not stored anywhere by this routine before it is altered — but the screen used to Print Over the old display still remains intact higher up in the memory. The attributes are not changed by this routine so after the routine has been used the attributes being displayed are those of the old display. See listing 21.

Renumber: this routine, listing 22, instantly renumbers all the line numbers of your program starting the first line at a specified value and increasing this value by a specified amount as it renumbers the rest of the lines. Note that this does not change the Gotos and Gosubs so you will have to alter these manually. If the first line is renumbered L and the value by which L is increased is M then:

POKE X+5, M -INT(M/256)
POKE X+ (INT(M/256)
POKE X+8, L -INT(L/256)
POKE X+9, INT(L/256)

For fun you might try renumbering all lines 0 or try using a starting value greater than 9999.

The uses of these routines are many and varied, limited only by the imagination of the user. For example, the left and right scrolls with wrap-around may be used to create a constantly moving background for a space game. Any of the scrolling routines may be used to clear all or part of the screen in a novel way.

The Ink and Paper changing routines may be used to create a surprise effect by first drawing a picture on the screen using the same Ink and Paper colour and then altering either so that the picture appears instantly. Animated cartoon effects are possible using the screen swapping routines and stunning explosion effects may be simulated by using the Invert Screen routine repeatedly — in a loop. The list is endless and these are just a few broad guidelines that you can experiment with and doubtless improve on.

Just as a bit of fun try the following Poke next time you have a program in your Spectrum, Poke 23606, 8. This makes the computer speak Russian — nearly. Poke 23606,0 restores normality.

Program 1. Hexloader

```
  1 REM ...Enough full stops to
hold the machine code routine.
  5 LET a=5+PEEK 23635+256*PEEK
23636
 10 FOR n=a TO a+200: READ a$
 15 LET x=CODE a$-48-(39*(a$>"
")): LET y=CODE a$(2)-48-(39*(a$
(2)>"F")):
 20 POKE n,x*16+y: NEXT n
RAMTOP method users change
line 5 to:
5 CLEAR x: LET a=x
where x is the address they need
to move RAMTOP to.
```

Program 2. Start of line finder.

```
9000>REM start of line finder
9010 LET a=PEEK 23635+256*PEEK 2
3636
9020 CLS : PRINT "LINE No.",^ADD
RESS"
9030 IF PEEK (a+4)<>234 THEN STO
P
9040 PRINT PEEK a+256+PEEK (a+1)
,a+5
9050 LET a=a+4+PEEK (a+2)+256*PE
EK (a+3)
9060 GO TO 9030
```

Listing 2.

```
100>REM HI-RES UP SCROLL
    97 bytes long
 102 DATA "21","00","40","06","0
3","c5","06","08","e5","11","00",
"c5","06","20","e5","19","d1","1
b","7a","b3","20","f4","c1","10",
"ed","52","c1","10","e6"
 104 DATA "c1","78","fe","01","2
8","12","c5","06","20","11","20",
"e5","19","d1","7e","12","23","1
0","f4","c1","10","ec","06","00",
"23","10","fb","c9"
```

(continued on page 83)

Listing 3.

```
100>REM HI-RES DOWN SCROLL
    99 bytes long
 102 DATA "21","f8","57","06","0
3","c5","06","08","e5","06","07",
"c5","06","20","e5","11","00","1
b","7a","b3","20","f4","c1","7e",
"2b","10","fb","11","60","00","
a7","ed","52","c1","10","e6"
 104 DATA "c1","78","fe","01","2
8","16","c5","06","20","11","e0",
"e5","19","d1","1b","7a","b3","2
0","f4","c1","10","f2","11","60",
"07","19","c1","10","e6"
 106 DATA "c1","78","fe","01","2
8","13","c5","06","20","11","20",
"e5","19","d1","7e","12","23","1
0","fa","aa","06","20","56","00",
"2b","10","fb","c9"
```

ANIROG Computers

ONE STOP SHOP FOR SOFTWARE AND BOOKS
SPECTRUM — VIC 20 — ZX81-C-64 — DRAGON 32

VALUE FOR MONEY SOFTWARE BY ANIROG. FOR VIC-20
Our packs of seven games contain a balanced mixture of action packed arcade style, board and adventure games. All are in Hi-res Graphics for unexpanded VIC and offer exceptional value for money at only £6.

PACK OF SEVEN (VOL 1) — PACK OF SEVEN (VOL 2) — TINY TOTS SEVEN - Games for young children. Bright colour graphics and exciting sound effects are special features of these specially written programmes.

PUZZLE — ADVENTURE DRACULAR (3K EXP)
The Count is resting, find the things you need to do the deed. After sundown which is soon . . . . . !

ARCADE MACHINE CODE PROGRAMS: (FOR STD VIC-20)
SPACE RESCUE A belt of orbiting asteroids has trapped your crew. To rescue them you must pilot the shuttle to the planet surface and beam them up one at a time, fuel is limited too! JS/Keys.

CRAWLER Centipedes in the mushroom garden move at a fantastic speed, they must be destroyed. Mushroom planting fleas will box you in! Watch out for spiders! Shoot fast to survive. JS.

CAVERN FIGHTER An exciting version of scramble many hazards in a random course. Fuel shortages will of course add to your problems. JS

NEWMULTI SCREEN GAMES.
Coming next month 16K games for the Vic-20 with full graphics and sound: PHARAOHS TOMB; ZOKS KINGDOM; and SPACE ADVENTURE XNENOS II

ALL ANIROG TITLES ARE ONLY £6 EACH
TWO OR MORE ITEMS 7.5% DISCOUNT. 5 ITEMS – £1.00 EXTRA DISCOUNT. ANY MIX OF BOOKS OR SOFTWARE ACCEPTED

Full range of sfotware by leading software houses in the country.
BUG BYTE, QUICK SILVA, RABBIT, AUDIOGENIC, ARCTIC, A.S.K., SILVER SOFT, ROMIC, J.K. GREY PROGRAMME POWER, LLAMASOFT, SOFTEK, VIDEO SOFTWARE, COMMODORE, DRAGON, and many others.
Huge selection of computer books. Massive stock of books and software. Despatch within 48 hours of receipt of order.

SEND S.A.E. FOR CATALOGUE. PLEASE STATE THE COMPUTER TYPE.

VIC-20 NEW RELEASE FROGGER,

Help our frogs cross the motorway. Then negotiate the river with the floating logs, Turtles, alligators to the safty of his hole. There are PERKS!

Mail Order
Payment by cheque,
P.O. or Visa

26 Balcombe Gardens,
Horley, Surrey.
Horley (029 34) 2007/6083

BARCLAYCARD VISA

Personal Shoppers Welcome at

CO-OP CRAWLEY

Access

SIR Computers Ltd.

Agents for Acorn and Torch Computers

BBC Microcomputers

Model A	£299.00
Model A + 32K RAM	£339.00
Model B	£399.00
Model B + Disc interface	£479.00

BBC Compatible TEAC Disc drives

Single disc drive	£249.00
Dual disc drive	£459.00

Torch Disc unit

This is a complete package including a Z-80 processor, 64K RAM, Dual disc drive and the CP/N operating system — fully compatible with all existing CP/M software. Requires a disc-upgraded BBC Model B.

Torch disc pack	£1,149.00

ACORN COMPUTER

8K ROM + 2K RAM	£149.50
8K ROM + 12K RAM	£179.00
12K ROM + 12K RAM	£199.00
16K ROM + 12K RAM	£229.00
1.8 A Power supply	£8.50
ATOM Disc pack	£345.00

please add £7.50 for interlink delivery of BBC Computers & Disk Drives

All prices are inclusive of VAT

SIR Computers Ltd.
38 Dan-y-Coed Road, Cyncoed, Cardiff
Tel: (0222) 759015

(continued from page 81) Listing 1.

```
100>REM MEMORY LEFT
     14 bytes long
102 DATA "21","00","00","39","e
d","5b","65","6c","a7","ed","52"
,"e5","c1","c9"
```

Listing 4.

```
100>REM HI-RES LEFT SCROLL
     32 bytes long
102 DATA "21","00","40","06","c
0","c5","06","1f","7e","cb","27"
,"77","23","7e","cb","27","77","
30","06","2b","7e","cb","c7","77
","23","10","f1","23","c1","10",
"e6","c9"
```

Listing 5.

```
100>REM HI-RES RIGHT SCROLL
     32 bytes long
102 DATA "21","ff","57","06","c
0","c5","06","1f","7e","cb","3f"
,"77","2b","7e","cb","3f","77","
30","06","23","7e","cb","ff","77
","2b","10","f1","2b","c1","10",
"e6","c9"
```

Listing 6.

```
100 REM 1 CHR. LEFT SCROLL
     25 bytes long
102 DATA "06","c0","11","00","4
0","d5","e1","23","c5","01","1f"
,"00","1a","ed","b0","2b","77","
00","23","23","13","c1","10","f0
","c9"
```

Listing 7.

```
100>REM 1 CHR. RIGHT SCROLL
     25 bytes long
102 DATA "06","c0","11","ff","5
7","d5","e1","2b","c5","01","1f"
,"00","1a","ed","b8","23","77","
00","2b","2b","1b","c1","10","f0
","c9"
```

Listing 8.

```
100>REM INVERT SCREEN
     19 bytes long
102 DATA "21","00","40","06","1
8","c5","06","00","7e","ee","ff"
,"77","23","10","f9","c1","10","
f3","c9"
```

Listing 9.

```
100>REM SCREEN FILL
     30 bytes long
102 DATA "0e","40","21","16","0
0","11","20","00","45","d5","c5"
,"43","3e","16","d7","7c","d7","
7a","d7","79","d7","14","10","f4
","24","c1","d1","10","ec","c9"
```

Listing 10.

```
100>REM INK CHANGE
     25 bytes long
102 DATA "3e","05","e6","07","5
7","21","00","58","06","03","c5"
,"06","00","7e","e6","f8","b2","
77","23","10","f8","c1","10","f2
","c9"
```

Listing 11.

```
100>REM PAPER CHANGE
     31 bytes long
102 DATA "3e","00","cb","27","c
b","27","cb","27","e6","38","57"
,"21","00","58","06","03","c5","
06","00","7e","e6","c7","b2","77
","23","10","f8","c1","10","f2",
"c9"
```

Listing 12.

```
100>REM FLASH ON/OFF
     17 bytes long
102 DATA "21","00","58","06","0
3","c5","06","00","cb","fe","23"
,"10","fb","c1","10","f5","c9"
```

Listing 13.

```
100>REM BRIGHT ON/OFF
     17 bytes long
102 DATA "21","00","58","06","0
3","c5","06","00","cb","f6","23"
,"10","fb","c1","10","f5","c9"
```

Listing 14.

```
100>REM ATTR FILL
     44 bytes long
102 DATA "3e","64","01","00","0
0","11","20","18","21","df","57"
,"d5","11","20","00","04","19","
10","fd","41","04","23","10","fd
","d1","42","e5","48","43","77",
"23","10","fc","e1","d5","11","2
0","00","19","d1","41","10","ef"
,"c9"
```

Listing 15.

```
100>REM ATTR UP
     55 bytes long
102 DATA "3e","2f","01","00","0
0","11","20","16","21","df","57"
,"f5","d5","11","20","00","04","
19","10","fd","41","64","23","10
","fd"
104 DATA "d1","42","05","c5","0
6","00","4b","d5","e5","11","20"
,"00","19","d1","e5","ed","b0","
e1","d1","c1","78","10","ec","f1
","43","77","23","10","fc","c9"
```

Listing 16.

```
100>REM ATTR DOWN
     62 bytes long
102 DATA "3e","2f","01","00","0
0","11","20","16","21","df","57"
,"15","f5","76","82","47","79","
83","4f","d5","11","20","00","04
","19","10","fd"
104 DATA "41","23","10","fd","d
1","42","c5","06","00","4b","d5"
,"e5","11","20","00","a7","ed","
52","d1","e5","ed","b8","e1","d1
","c1"
106 DATA "78","10","ea","f1","4
3","77","2b","10","fc","c9"
```

Listing 17.

```
100>REM ATTR LEFT
     52 bytes long
102 DATA "3e","2f","01","00","0
0","11","20","18","21","df","57"
,"f5","d5","11","20","00","04","
19","10","fd","41","04","23","10
","fd","d1"
104 DATA "42","f1","c5","06","0
0","4b","0d","d5","e5","d1","1a"
,"d5","23","ed","b0","12","e1","
11","20","00","19","d1","c1","10
","e9","c9"
```

Listing 18.

```
100>REM ATTR RIGHT
     61 bytes long
102 DATA "3e","2f","01","00","0
0","11","20","18","21","df","57"
,"15","f5","76","82","47","79","
83","4f","d5","11","20","00","04
"
104 DATA "19","10","fd","41","2
3","10","fd","d1","42","04","f1"
,"c5","06","00","4b","0d","d5","
e5","d1","1a","d5","2b","ed","b8
","12","e1","11","20","00","a7","
ed","52","d1","c1","10","e7","c
9"
```

Listing 19.

```
100>REM STORE SCREEN
     12 bytes long
102 DATA "11","32","64","21","0
0","40","01","00","1b","ed","b0"
,"c9"
```

Listing 20.

```
100>REM SWAP SCREENS
     28 bytes long
102 DATA "11","32","64","21","0
0","40","06","18","c5","06","00"
,"c5","7e","f5","1a","47","f1","
a8","77","23","13","c1","10","f3
","c1","10","ed","c9"
```

Listing 21.

```
100>REM OVER PRINT SCREENS
     25 bytes long
102 DATA "11","32","64","21","0
0","40","06","1b","c5","06","00"
,"7e","f5","1a","77","f1","12","
23","13","10","f6","c1","10","f0
","c9"
```

Listing 22.

```
100>REM RENUMBER
     38 bytes long
102 DATA "ed","5b","53","5c","0
1","0a","00","11","64","00","d5"
,"e5","ed","5b","4b","5c","af","
ed","52","e1","d1","c8","c5","72
","23","73","23","4e","23","46","
23","09","eb","c1","09","eb","1
8","e4"
```

COMPACT BASIC: EASY AS ABC

Slim down those outsize programs to fit your memory with David Berry's Atom Basic Condenser routine — ABC.

ATOM BASIC CONDENSER or ABC can perform all the compaction functions and remove Rems, spaces, unnecessary brackets, and variables from Next commands. All commands may be converted to their short-form version and program lines concatenated to produce lines of up to 254 characters in length. All of these functions are menu-selectable and are programmed into ABC at the start of the run.

If you now look at the listing you will see the ABC itself is compacted. When you type the program in you will have to break the long lines down into two or more shorter ones. Enter the program into the upper text space using short-form commands throughout.

Now type Run, then Esc and Print &L and enter the machine code listed in figure 2. You can now use ABC in the upper text space, but if you want to be able to use it in either text space you will now have to copy each routine into lower text space and compact it using ABC.

Store each routine on tape, and when they are all compacted, assemble them into one program in the lower text space. Again type Run then Esc and Print &L. Then enter the machine code listed in figure 2. If you tried compacting the machine code you will already have found out that it is not advisable. Once you have done this ABC is complete.

ABC may be loaded from tape into either text space. If it is loaded into the lower text space starting at # 2900 it will almost completely fill the available RAM and the value of Top will be # 3BFB. This means that if you see any of the inverted |@| markers to preserve line numbers referenced by Goto, Gosub and similar commands, the interpeter will generate an "out-of-memory" error — error 30 — because it is trying to dimension an array element in non-existent RAM locations above # 3BFF.

```
L-1  =EA
L    =A4
L+1  =80 THEN: A9 00 85 80 C8 F0 10 B1 80
      8D 02 B0 88 91 80 C9FF F0 1B C8 C8
      D0 F0 E6 81 B1 80 C6 81 88 91 80 E6
      81 C8 C8 4C D0 3B EA EA 20 71 FE 84
      88 60 22 0D FF
```

Figure 2. Machine code to be entered from L-1 onward.

There are two simple solutions to this problem: first the program could be *Loaded into the lower text space starting at # 2800:

*LOAD"ABC"2800

The second solution is to change the parameter A in line 30 of the program. A holds the base-address of the array and is normally set to Top. This can be changed to store the array anywhere in memory. It may be set to # 2800, when the array will be stored in the bottom part of the lower text space, or to # 8100 when the array will use the lower half of the screen,or to # 2920 which will cause the array to be stored inside ABC itself.

If you choose the latter option you will, of course, be overwriting part of ABC — the menu — which will have already been finished with by the time the array is set up. You will not afterwards be able to Run the program again without reloading it.

This problem does not occur if ABC is loaded into the upper text space where more RAM is available above the program. So load ABC into your chosen text space with the *Load command:

*LOAD"ABC"2900
*LOAD"ABC"2800
*LOAD"ABC"8200

Next load the target program, that is, the program to be reformed, and mark any lines referenced by Goto, Gosub and similar commands with the dummy lable |@| — inverted @. I have used a line on either side of a character to show that it is inverted.

```
0320 GOTO 0400
0400|@|REM This line number will be saved.
```

These line numbers will be the only ones preserved after processing is complete — all others will be renumbered. Any number of |@| labels may be used and ABC removes them after processing.

Now point the interpreter to ABC by changing the contents of location 18.

?18 = # 28
?18 = # 82

To execute ABC type Run. Immediately after the run starts the menu is printed. The available options are:

|C| Short—form commands
|N| Remove variable from text
|P| Remove all parenthesis
|R| Remove all Rem statements
|S| Remove all spaces
|W| Wrap all Basic lines

The capital letters are inverted characters.

The program then asks you to Input a command string. This is made up of one or more menu selections — inverted capital letters; these are the actual labels used to control the program jumps — entered immediately after one another.

|C|N|S|
|S|
|C|N|P|R|S|W|

ABC then prompts for the most significant byte — MSB — of the target program address. For example in a program at 2900 the MSB is # 29, and in a program at 8200 the MSB is # 82.

Note that these are MSBs of the target program, not ABC.

All command-string entries are verified. ABC will not accept any entry which is not one of the inverted letters |C|N|P|R|S|W|. If an incorrect entry is made the command string is printed, the incorrect entry indicated, and a correction requested. During this correction phase you may enter an inverted |B| which is a dummy activity — B=blank — and can thus be used to eliminate an entry if required.

ABC also contains an error-trapping routine which ensures that if any run-time errors occur the target program is not left in a semi-processed state.

At the start of each routine the bell is rung. If any key is pressed immediately after the bell, that routine is skipped. If no key is pressed the activity continues after a short pause.

ABC is of modular construction. Once the command string is entered, processing is effected by a series of calls to subroutines. The actual subroutines called, and the order of their calls, is controlled by the command string entered. Two routines are always called: the initialising routine and the terminating routine, and these take care of the housekeeping.

The initialising routine changes all the line numbers in the target program to zero, stores any line numbers marked with the dummy label inverted |@| and replaces spaces in For, Until and If statements — that are necessary for their correct interpretation — with inverted blanks — ASCII # 80.

This short-form routine — S — replaces all Basic commands with their short-form

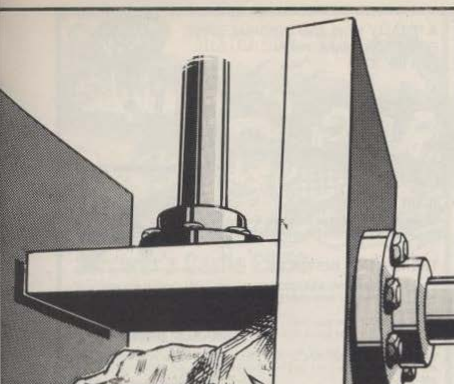

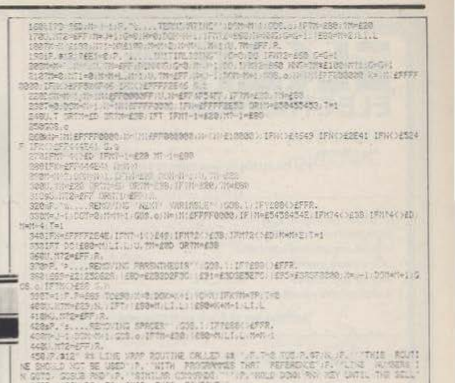

version. For example Print is replaced by P.; Input by In.; FUntil by FU.; Gosub by GOS. etc. Over 40 commands are processed by this routine which also displays the command being changed.

The control variable in a For-Next loop need not be included in the Next command. The Next variable — N — routine removes all such variables from Next and N. commands.

The remove-parenthesis — P — routine removes sets of brackets which do not enclose one of the following:

!% &* + - < = >? ¦ ¦¦

Note that the list does not include the hash symbol. Leaving this out creates a problem only when assembler instructions of the following form are used:

STA (# 80),Y

The remarks routine — R — removes all Rem statements, whatever their form:

10 REM	All of this line will be removed
20|A|REM	The line number and label will be left
30 A=3:REM	The statement A=3 will be left.

The spaces routine — S — removes all remaining spaces within the program. Spaces necessary for correct interpretation are exchanged by the initialising routine for inverted blanks and are thus not affected by this routine.

The line-wrap routine — W — makes use of the fact that while the length of lines of Basic text in a program is normally limited by the size of the input buffer to 64 characters, the interpreter can handle lines of up to 254 characters. This routine generates lines of up to the maximum allowable length.

The routine checks for If, Rem and End commands in the preceding line, and for labels in the current line, and will not remove the line number if any of these are present.

You should note that, once this routine has been run, the Atom's Editor will be unable to change new program lines which are longer than 63 characters, so make sure your target program is thoroughly tested out after all other operations are complete, before you use this routine.

The terminating routine — T — completes the processing by removing all inverted |@| labels, replacing inverted blanks with spaces and renumbering the entire target program, taking account of my lines previously marked with inverted |@| markers. The following example indicates the numbering sequence used. First, before processing:

```
10 REM example
20 INPUT A;GOSUB |A|
30 IF A=3 GOTO 50
40 PRINT A;END
50|@|PRINT "A=3";END
60|A| RETURN
```

The vertical lines indicate inverted characters. After processing:

```
1|N.A;GOS.|A|;IFA=3 G.50
2P.A;E
50P."A=3";E
51|A|R.
```

■

ELKAN ELECTRONICS

New Books **New Software!**

For DRAGON 32 and TANDY TRS 80 colour computers

101 program tips & tricks	£5.95
55 programs home/school/office	£7.45
55 MORE programs home/school/office	£7.45
Colour computer graphics	£7.95
Colour computer songbook	£5.95

All books complete with adjustments for DRAGON 32 – an ELKAN exclusive.

(Add 50p per book p.& p., up to max £1.50 per order)

New Software for DRAGON 32:

DRAGONWORD word processing program	£17.95
DATABASE (500 card index)	£19.95
HOME ACCOUNTS	£19.95
"Towers of Hanoi" game	only £ 4.95

Send for full list of other games

"RAINBOW" magazine – a Fabulous monthly magazine for all TRS – 80 and DRAGON 32 colour computer users
Send £1.95 (plus large 26p s.a.e.) for sample copy.
Send cash, cheque, Access or Visa Card No. Ask for our New FREE pocket brochure. Trade enquiries welcome anytime
ELKAN ELECTRONICS (Dept. YC)
FREEPOST, 28 Bury New Road, Prestwich, Manchester M25 6LZ or telephone
061-798 7613 (24hr. service). See full list on Prestel 258.2022

A TOTALLY NEW AND ORIGINAL GAME FROM SOFTWARE FARM FOR 16K ZX81

NEW!

the Super Scramble



YOUR MISSION

To penetrate the Witches Defences, Enter her Cavern and Destroy her wicked Heart

THE WITCHES DEFENCES

STALAGMITES AND STALACTITES which grow across your path. Blast a way through with your Lazer Cannon (but beware – a surprise is in store fore you!).
VOLCANOES to get past alive – if you can! – an ever increasing amount of white hot Larva to avoid the closer you get to the witches cavern.
VAMPIRE BATS that cling to your ship, making your controls sluggish and finally (if you are not careful) dragging you down to your destruction.
CAVE-INS should you hit the side of the cave with your Lazer Cannon or Bomb, part of the roof will cave in on you – the greater the landslides to avoid each time!.
THE NEARER you get to the Witches Cavern, the more of her Defences she will throw at you at once. Should you survive all of them (highly unlikely) then you must contend with the Witch herself! Avoid being turned to stone by her spells while attempting to destroy her wicked Heart!.

* Written entirely in Machine Code
* Hall of Fame
* 1 or 2 Players
* Mystery Score positions to bomb
* 5 Skill Levels

DESTINED TO BECOME A CLASSIC!

AND ONLY £5.95

THE SOFTWARE FARM
CRAIGO FARM, BOTANY BAY, TINTERN, GWENT

Why should games players have all the fun?

SUPERPLAN FROM VIDEO SOFTWARE LTD

For 48K ZX Spectrum
We take ZX computers seriously

Serious software which you will enjoy using

With SUPERPLAN you can put your ZX Spectrum to serious use in the home, school, club or small business.

Create and update an analysis sheet or spreadsheet within the Spectrum's 48K RAM.

Save the chart on cassette. View it using the TV screen as a window. Update it from the keyboard. Print it on your ZX printer (optional).

We have delayed advertising this product until now to ensure availability.

- Machine coded scrolling with user variable windows.
- Binary coded decimal arithmetic (BCD).
- Variable column width.
- Up to 52 columns.
- Chart capacity exceeds 40000 digits.
- Full colour display.
- "Flashing box" positioning under keyboard control.
- Arithmetic functions + - * / % (and one or two more).
- Audit trail of all entries.

VIDEO SOFTWARE LIMITED
Stone Lane, Kinver, Stourbridge, West Midlands.
Tel: 038-483 2462.

SAE for data sheet

SUPERPLAN. The complete do-it-yourself analysis chart generator and processor. £12.

SUPERPACK 1. Four ready-made charts for business – sales daybook, purchase daybook, cash book and petty cash book. Complete with SUPERPLAN processor but without the generator. £7.

Cash with order for immediate delivery. Prices include VAT, P. & P.

SPECTRUM

24 LINE INPUT/OUTPUT PORT (motherboard not required)	£18.95
MOTHERBOARD – SIX SLOTS	£26.50
MOTHERBOARD PCB ONLY	£ 6.50
SPECTRUM 28 WAY CONNECTOR	£ 3.25
MALE CONNECTOR	£ 1.90
34 WAY RIBBON CABLE per metre	£ 1.80

ZX81

40 KEY KEYBOARD	£20.00
SPARE KEYS each	£ 0.25
MOTHERBOARD – TWO SLOTS	£15.00
24 LINE INPUT/OUTPUT PORT	£18.95
16K RAM PACK	£25.00
MUSIC BOARD	£18.95
23 WAY FEMALE CONNECTOR	£ 2.50
MALE CONNECTOR	£ 1.60
24 WAY RIBBON CABLE per metre	£ 1.40
GETTING ACQUAINTED WITH YOUR ZX81	£ 4.95
PROGRAMMING FOR REAL APPLICATIONS	£ 6.95
REAL APPLICATIONS TAPE	£11.44
MASTERING MACHINE CODE	£ 7.50

Prices are for built items. Postage 40p under £4.00. Export postage (surface) £1.80. Send SAE for full catalogue. Cash with order or ACCESS

DEPT. YC1

REDDITCH ELECTRONICS

21 FERNEY HILL AVENUE, REDDITCH WORCS B97 4RU

Great games for your Spectrum

from MIKRO-GEN the leaders in ZX games

Sorcerer's Castle £5.50

New from Mikro-Gen - takes you into a world of magic and mystery. Graphical position and a host of options with this exciting adventure game for the 48K Spectrum

Scramble £5.50

High-speed arcade game - the fastest available. Thrust, altitude, fire and bomb controls. For 16K or 48K Spectrum

Masterchess £6.95

The program for the *real* player - a powerful, adventurous and enjoyable chess game for the 48K Spectrum

And for your ZX81:

Scramble + Frogs + Paintmaze + ZX Chess + Breakout + Space Invaders + Asteroids + Tempest + 1K Gamespack + Debug

All supplied on cassette with library case : £3.95 (ZX Chess £6.50)

Write for full details of the Mikro-Gen range of programs and add-ons available from local stockists or direct from the manufacturers (please make cheques/PO's payable to Mikro-Gen and add 40p post & packing)

MIKRO-GEN

24 Agar Crescent Bracknell Berks RG12 2BK

Professionally Written and Produced Software for the Home Computer
From M. E. Evans the author of the highly acclaimed **3D MONSTER MAZE** and **3D DEFENDER** for the ZX81 comes **TWO GAMES FOR THE SPECTRUM**

3D TUNNEL

(16K & 48K versions on one tape)

What lies down in the depths of the TUNNEL? Flying bats, leaping toads, spiders*, and rats* maybe. Perhaps more! You will have to avoid the walls of the TUNNEL as it weaves up & down and side to side to find out. All in 3D of course (* not in 16K version).

ESCAPE (runs in 16K)

Can you ESCAPE from the maze inhabited by 5 hunting Dinosaurs, including a Pteranodon that soars over the maze to swoop down on you.

"One of the best and most original games we have seen for the SPECTRUM so far" SINCLAIR USER.

Trade enquiries welcome at address below

Available mid-Jan.

NEW GENERATION SOFTWARE
FREEPOST (BS3433) Oldland Common, BRISTOL BS15 6BR
(no stamp required in UK)
or for **INSTANT CREDIT CARD** sales ring 01-930 9232
s.a.e. with enquiries please.

Please send me .....off 3D TUNNEL/ .....off ESCAPE, at **£4.95** each (inc p&p and VAT). I enclose cheque/P.O.

Mr/Mrs/Miss .....

Address .....

..... post code .....

YC01

BBC ▼ nascom SPECTRUM

adventure

Colossal Adventure: The classic mainframe game "Adventure" with all of the original treasures and creatures plus 70 extra rooms!

Adventure Quest: From the Great Forest; up Orc Mountain; through caves, desert, swamp, fire, lake and bleak moorland on an epic quest to defeat Tyranny.

Dungeon Adventure: NEW! The dungeons of the Demon Lord have survived His fall. Can you acquire their treasures first?

Each Level 9 adventure is packed with puzzles and has over 200 individually described locations - a game could take weeks to complete! Only data and code compaction allow us to provide so much.

Each adventure requires 32K of memory & costs £9.90 (including VAT and P&P).

Send order, describing your computer, or a SAE for full details to:

LEVEL 9 COMPUTING
229 Hughenden Road, High Wycombe, Bucks

HILDERBAY

SPECTRUM SOFTWARE (48K)

PAYROLL (50 employees, all tax codes, pay levels, NI contributions; Hourly, weekly, monthly; payslips, summary of payments; Very easy to use; Amendments to employee details very easy right up to the last minute; Can also compute gross pay & deductions from net pay). £25

STOCK CONTROL (typically 1500 stock lines; prints list of all lines, or lines with given codes, or understocked lines; locate-by-name/add/delete stock line in under two seconds; prints values of stock. Program loads in one minute, data in less than three). £25

GOLD our best-selling adventure game, now available on the Spectrum! £8

ZX-81 SOFTWARE (16-48K)

BEAMSCAN. Computers bending moment and shear force diagrams for a simply supported beam with 1-99 point, uniform, and uniformly tapered loads. £25.
TIME LEDGER for up to 17 employees, 200 clients. A great time-saver! £15
OPTIMAX. A powerful linear optimisation program. Up to 75 variables: <, =, > constraints. £40
PAYROLL. Similar to the Spectrum version, but 30 employees. £25
STOCK CONTROL: about 400 stock lines in 16K, 2000 in 48K). £25
CRITICAL PATH ANALYSIS. Enter & solve 500-activity network in 16K. Edit durations & costs, & repeat. £15
BUDGET. Keeps track of expenses & compares them with budget. 50 headings, 12 months (I) or 12 categories (II). £15 for budget I & II (together)
FINANCIAL PACK I. Contains three programs: MORTGAGE, LOAN, VAT. £8

GOLD. A tantalising adventure game! £6

Do your programs load from tape first time, every time? If not, you need...

(1) THE MICROCOMPUTER USER'S BOOK OF TAPE RECORDING by Hilderbay Ltd.

Contents:

PART I (for everybody; the 'how to' part):
- How your system should work
- choosing a tape recorder
- testing and adjusting your tape recorder
- keeping your recorder in good condition
- the selection and care of tapes
- making reliable recordings
- loading 'difficult' tapes
- useful accessories.

PART II (more for enthusiasts; the 'why' part):
- how a tape recorder works
- computer cassette interface waveforms
- stereo heads, azimuth angle error
- miscellaneous tape problems.

Price £3.15 incl postage; £2.90 from bookshops. Or ask for it at your library.

(2) TEST AND ALIGNMENT CASSETTE: a precision accessory which enables you to set up the azimuth angle of your cassette recorder head accurately using only a small screwdriver! Azimuth error is one of the commonest causes of tape troubles. With full instructions. £4.90.

(3) LOADING AID: if your recorder is basically OK, but you have trouble getting the playback level right with tapes from different sources, you need our Loading Aid! Also suitable for checking the quality of tapes, detecting and (sometimes) compensating for dropouts, etc. With full instructions and hints on tape use. £5.95

(4) TAPE RECORDER aligned and tested for computer use. A simple, but satisfactory, machine. £22 + £2 postage
(All products suitable for most computers)

SPECIAL TAPE OFFER!
Book + alignment cassette + loading aid for £11.90!

Free program (ZX-81 or Spectrum) with all orders of £22 or over postmarked before 1 February!
All prices include VAT. Everything post free unless stated otherwise COD orders £2 extra. Access orders accepted by telephone.

Hilderbay Ltd
Professional Software
8/10 Parkway
Regents Park
London NW1 7AA Since 1979
Tel: 01-485 1059 Tlx: 22870 We have 20 years experience in computers

PASCAL FOR THE ZX SPECTRUM

Hisoft are pleased to announce the availability of Hisoft Pascal 4 for the 48K ZX SPECTRUM.

No longer do you have to put up with the slow execution speed of BASIC programs; Hisoft Pascal 4 produces programs that run between 40 and 100 (yes 100!) times faster than the equivalent programs written in ZX SPECTRUM BASIC. For example, a program to sort a 100 element array of numbers into ascending order takes 60 seconds in BASIC, while HP4 produces a program which does the same thing in 0.6 seconds!

NOW you and your children can learn to program in an efficient and structured way by using Pascal, the favoured language in schools and universities.

NOW you can write games programs etc. which run as fast as you need them to without having to resort to assembler or machine code.

NOW you can use a language which requires minimal re-learning when you move from your SPECTRUM to another computer; Hisoft Pascal 4 has all the essential features of Standard Pascal as detailed in the Pascal User Manual and Report – by Kathleen Jensen and Niklaus Wirth, the man who designed Pascal.

Hisoft Pascal 4 is a professional piece of software designed by a team who have been writing Pascal compilers for many years – you will find it to be powerful, flexible and very easy to use.

To top it all, we are offering the package (which includes a 60 page manual), for a limited time, to 48K ZX SPECTRUM users at an INCREDIBLE price of:

ONLY £25 INCLUSIVE

Write for more details TODAY to:

HISOFT
60 Hallam Moor
Liden SWINDON
SN3 6LS

Tel. (0793) 26616 (Answering machine)



ZUCKMAN
ZX81 (16K)

- *ALL MACHINE CODE (10K)
- *FOUR INDEPENDENT GHOSTS
- *HIGH-SCORE 'HALL OF FAME'
- *AUTHENTIC ARCADE ACTION
- *TITLE/DISPLAY MODE

ONLY £5.95 INC. P&P

FROGGER
ZX81 (16K)

- *MOVING CARS, LOGS, TURTLES
- *ALLIGATORS, DIVING TURTLES
- *FOUR 'SCREENS' OF ACTION
- *ALL ARCADE FEATURES
- *ENTIRELY MACHINE CODE

ONLY £5.95 INC. P&P

NEW ☆ **DRAGON 32 SOFTWARE** ☆ NEW

MISSILE COMMAND ..... **ONLY £5.95**
FULL HIGH-RESOLUTION COLOUR GRAPHICS + SOUND

GRAPHICS DEMONSTRATOR ..... **ONLY £5.95**
LEARN THE SECRETS OF HI-RES GRAPHICS PROGRAMMING

DJL SOFTWARE

DEPT YC, 9 TWEED CLOSE, SWINDON, WILTS SN2 3PU

TRADE ENQUIRIES WELCOME

BBC COLOUR OVERLAY

You can put moving graphics into real perspective with Michael Murray's explanation of the colour overlay.

Demonstration program.

```
  10MODE2
  20VDU 5 :REM Join the text and graphics cursors
  30VDU19,0,4,0,0,0 :REM Background (colour 0) = blue
  40VDU19,1,5,0,0,0 :REM Far figure (colour 1) = magenta
  50VDU19,2,3,0,0,0 :REM Near figure (colour 2) = yellow
  60REM Near figure + far figure (colour 3) = yellow, so does not need to be re
-defined
  70VDU19,4,7,0,0,0 :REM Foreground (colour 4) = white
  80VDU19,5,7,0,0,0 :REM Foreground + far figure (colour 5) = white
  90VDU19,6,7,0,0,0 :REM Foreground + near figure (colour 6) = white
 100REM Foreground + far & near figures (colour 7) = white, so does not need to
 be re-defined
 110REM***** SET THE SCENE ******
 120GCOL0,4 :REM Lines 110-140 draw the foreground
 130MOVE 500,0
 140DRAW 600,900
 150PLOT05,700,0
 160NX=0 :REM Start position of the near figure
 170 NX=0 :REM Increment to move near figure
 180XF%=1279 :REM Start position of the far figure
 190 FX=-16 :REM Increment to move far figure
 200MOVE XN%,500 :REM Move to near figure start point
 210VDU23,224,&FF,&FF,&FF,&FF,&FF,&FF,&FF,&FF :REM Re-define CHR$(224) as the n
ear figure, an oblong
 220GCOL3,2:VDU224 :REM Print the near figure
 230MOVE XF%,600 :REM Move to the far figure start point
 240PROCTRIANGLE :REM Draw the far figure
 250REM**** MAIN LOOP ******
 260REPEAT
 270PROCMOVENEAR :REM Move the near figure
 280PROCMOVEFAR :REM Move the far figure
 290UNTIL FALSE :REM Press ESCAPE to stop
 300END
 310DEF PROCTRIANGLE :REM Draw the far figure
 320GCOL3,1 :REM EOR colour 1 (magenta)
 330PLOT1,-200,0
 340PLOT81,100,-300
 350ENDPROC
 360DEF PROCMOVENEAR :REM Move the near figure
 370GCOL3,2 :REM EOR colour 2 (yellow)
 380MOVE XN%,500 :REM Move to the current position
 390XN%=XN%+N% :REM Calculate the new position
 400VDU224 :REM Erase in the current position
 410MOVE XN%,500 :REM Move to the new position
 420VDU224 :REM Print in the new position
 430IF XN%<4 OR XN%>1215 THEN N%=N%*(-1) :REM Change direction at the edge of t
he screen
 440ENDPROC
 450DEF PROCMOVEFAR :REM Move the far figure
 460MOVE XF%,600 :REM Move to the current position
 470XF%=XF%+F% :REM Calculate the new position
 480PROCTRIANGLE :REM Erase from the current position
 490MOVE XF%,600 :REM Move to the new position
 500PROCTRIANGLE :REM Draw in the new position
 510IF XF%>1271 OR XF%<200 THEN F%=F%*(-1) :REM Change direction at the edge of
 the screen
 520ENDPROC
```

THIS IS a detailed explanation of one of the easiest ways to obtain moving graphics with colour overlay.

The Exclusive Or method is based on putting colours on the screen so that they are Exclusive Ored — EOR — with the colour already there, that is, by using GCol3,—. In this case the logical colour number must be considered as a binary value, for example:

colour 0 = 0000
colour 1 = 0001
colour 2 = 0010
colour 3 = 0011
etc., to:
colour 15 = 1111

To Exclusive Or two binary numbers they must be compared bit by bit. If a bit in one number is 1 and the corresponding bit in the other is 0 then the result will be 1, otherwise if both corresponding bits are 0 or both are 1 the result will be 0. For example:

binary	decimal	binary	decimal
0011	3	1101	13
1010	10	0111	7
1001	9	1010	10

Thus colours 3 and 10 will produce colour 9; colours 13 and 7 will produce colour 10.

This principle may be extended to cover a combination of as many colours as required. For example:

1001 colour 9
1100 colour 12
1011 colour 11
0110 gives colour 6

(continued on next page)

Program 1.

```
10MODE5
20VDU5 :REM Join text and graphics cursors
30GCOL3,3 :REM EOR colour 3 with background
40X=0 :REM Set start position
50MOVE X,500
60PRINT"A"
70REPEAT
80PROCMOVE
90UNTIL X>1215 :REM Until the edge of the screen is reached
100END
110DEF PROCMOVE
120MOVE X,500 :REM Move to the current position of the character
130PRINT"A" :REM Erase the character in the current position
140X=X+8 :REM Calculate the new character position
150MOVE X,500 :REM Move to the new position
160PRINT"A" :REM Print the character in the new position
170ENDPROC
```

(continued from previous page)

Note that the answer shows which bits are set to 1 in only one of the colours.?

Program 1 shows how the EOR method moves the letter A across the screen.

Layering of colours is best explained by using an actual example, so consider the following problem: there are to be two figures which will appear on the background, one in the far distance which will be plotted, and one in the near distance which will be printed. The near figure must pass in front of the far figure, and both figures must pass behind a fixed foreground object.

As mentioned earlier it is convenient to use colour 0 for the background, so this will be our starting point. For no particular reason we will choose colour 1 for the far figure and colour 2 for the near figure, so we have:

background	0000	colour 0
far figure	0001	colour 1
near future	0010	colour 2

Applying the rules for EOR, if the two figures coincide we will get:

far and near figures 0011 colour 3

Since the near figure must appear in front, colour 3 must be the same as colour 2. Now let the foreground be colour 4 — another arbitrary choice — and consider what happens if either or both of the figures coincide with the colour selected for the foreground.

foreground	0100	colour 4
far figure and foreground	0101	colour 5
near figure and foreground	0110	colour 6
both figures and foreground	0111	colour 7

Since the foreground colour must always be the one to show, colours 4, 5, 6 and 7 must all be the same as the foreground colour.

We now have four different layers of colour and still have eight more colours that we can use — in mode 2. Note that as the figures are defined so far only four different colours will be displayed, although we have used a total of eight to obtain the layered effect.

The reason for using EOR is that applying a colour using EOR has an on/off effect. If a character is Printed or Plotted using EOR it will appear on the screen, but if it is Printed/Plotted again in the same place it will disappear.

Example:	background	— colour 6	0110
	character	— colour 3	0011
	result	— colour 5	0101

Thus printing a character in colour 3 on a background of colour 6 will result in the character appearing as colour 5. Now if the same character is printed again in the same place using the original colour 3, the following happens:

displayed character	— colour 5	0101
re-print character	— colour 3	0011
result = background	— colour 6	0110

This demonstrates that printing once displays the character, and printing twice restores the background.

It is usually beneficial to use colour 0 as the main background colour since it will not change the colour of anything Exclusive Ored on to it. For example:

```
 0000   0000
 1111   0101
 ----   ----
 1111   0101
```

Movement is simply achieved using the following general procedures:

- Join the text/graphics cursors — if printing rather than plotting.
- Move to the start point.
- Print the character.

This gives a starting point and movement can be obtained by:

- Move to the current character position.
- Print the character, i.e., erase that which is already there.
- Calculate the required new character position.
- Move to the new position.
- Print the character at the new position.

The routine in lines 4 to 8 may be written as a procedure and called to move the character whenever needed. ■

abacus electronics

ZX 81 Spectrum

MONEY BACK GUARANTEE
CASSETTES DESPATCHED
WITHIN 48 HOURS

ABACUS CONTROLLER

Of all the Spec H/W items I have received this one most impressed me and its the only one I shall always use.

Developed to eliminate tedious swapping of plugs when LOADING or SAVING programs on cassette.

ZX SPECTRUM CONTROLLER: Single switch selection of SAVE, LOAD & AMP modes. Built in amplifier and loud-speaker boosts Spectrum sound output. Price **£14.95**

ZX81 CONTROLLER: Single switch selection of TALK, SAVE, CUE & LOAD modes. Built in microphone/speaker for fast and reliable program naming and cueing. Price **£9.95**

All items in this advertisement can be viewed before buying at the Buffer Micro Shop, London, and Jay Dee Communications, Water Street, Port Talbot.

AVENGER

AVENGER: This all action arcade-style game written in MACHINE CODE for the ZX Spectrum is fantastic! You are flying over a mountainous planet terrain. Your mission is to attack, using lasers and bombs, launch pads, buildings and missile silos. Alien craft attack you with missiles; guided missiles launched from the ground hunt you out. But what ever you do don't hit the atomic power stations!! Continuous display of time, score, shields and laser temperature. Five levels of play and high scores.

Price **£4.95** inc. Also available for the ZX-81 (16K) at **£4.95** inc.

Available at W.H. Smiths

SPECTRUM GAMES PACK 1

All four on one cassette at the incredible price of **£4.95** inc.

DESTROYER: Listen to the beeps of the sonar to locate and destroy the submarines before they sink the merchant ships.

ICEBERG: Steer your icebreaker through thickening pack ice to pick up survivors.

BATTLE: Destroy missile sites while avoiding mines and the computerised enemy tanks that are out to get you.

ANDROID PIT RESUCE: Rescue the miners before they are trapped in the flooding mines.

Access

186 St. Helens Ave, Swansea, W. Glam.
Tel: (0792) 50282

SPECIAL OFFER! Deduct £1 per cassette when ordering 2 or more.

TOP QUALITY MACHINE-CODE PROGRAMS

FOR THE BBC MICROCOMPUTER

NEW!

Fruit Machine (32K) £6.50 *(Basic & M.C.)*
Probably the best fruit machine implementation on the market. This program has it all . . . HOLD, NUDGE, GAMBLE, moving reels, realistic fruits and sounds.

NEW!

Alien Dropout (32K) £6.50
Arcade-style action continuing the high standards set by our previous programs. Flying aliens which fire at you and explode as they hit the ground.

Galaxians (32K) £6.50
Fast action version of the popular arcade game. 4 types of Galaxians (in 3 initial screen formations) swoop down individually or in groups of two or three. 6 skill levels, hi-score rankings, bonus laser bases and increasing difficulty. Superb sound effects and graphics.



Invaders (32K) £6.50
Superb version of the old classic arcade game with a few extras. 48 marching invaders drop bombs that erode your defences, and 2 types of spaceship fly over releasing large bombs which penetrate through your defences. Increasing difficulty, hi-score superb graphics and sound.

Space Fighter (32K) £6.50
Arcade-style game based upon features from DEFENDER AND SCRAMBLE. 5 types of menacing aliens fire at you and may attempt to ram you. Separate attack phases, fuel dumps, asteroids, repeating laser cannon, smart bombs, hi-score, rankings, 6 skill levels, sound effects.

Centipede (32K) £6.50
Another incredible arcade type game featuring mushrooms, snails, flies, spiders, and centipedes of course. Excellent graphics and sound. 6 skill levels, hi-score, rankings, bonuses, and increasing difficulty as the spiders become more active and the number of mushrooms increases.

We pay 25% royalties for high quality programs. * Dealer enquiries welcome.**

SUPERIOR SOFTWARE TELEPHONE: **0532-842714**
Dept. YC4. 69 Leeds Road, Bramhope, Leeds.

Please add 50p per order for P&P Add 15% VAT.

SPECIAL OFFER FOR CHRISTMAS!
Buy four of these excellent programs for the bargain price of just **£19.50**

HUGE SELECTION—OVER 400 IN STOCK!

HIRE ZX81/SPECTRUM PROGRAM TAPES

Get the most from your ZX81 or Spectrum at minimum cost by hiring program cassettes for just £1 each per fortnight (plus 40p p/p).

Our stock of over 400 tapes (up to 20 maker's original copies of the more popular ones) covers most of the best cassettes advertised in this magazine—and more: thrilling m/c arcade and adventure games, tests of skill, realistic simulations and a wide range of utilities for business, multi-indexing, banking, toolkit and graphic aids.

You can switch from ZX81 to Spectrum membership at any time by paying the balance, and hire up to three tapes at a time. Our regular illustrated magazine "Computerchat" is posted free to all members, with its product and software reviews plus our unique "Top Twenty" ZX tapes chart based on members' scores, and some special offers.

"An exceptionally professional and thriving organisation with, even, a most readable newsletter"—review in Eric Deeson's "Guide to ZX Spectrum Resources."

The Sinclair Owners' SOFTWARE LIBRARY Dept. YC,
Heather Cottage, Warren Road,
Liss, Hants GU33 7DD.

Yes, please—I'd like to join for the next 12 months. Please send on money-back approval my magazine, descriptive library catalogue and order forms, on the understanding that if I'm not delighted with your service within 28 days you will refund my money in full.

NAME.....

ADDRESS.....

.....Tel.....

I enclose cheque/Postal Orders for:

☐ £8.50 for ZX81 membership (overseas £2 extra in each case)

☐ £9.50 for Spectrum membership

JOYSTICKS

ZX Spectrum / ZX81

22.95 INC.VAT & P+P

FOR ONE JOYSTICK AND INTERFACE MODULE

BUILT, TESTED & READY FOR USE

- ★ **NO SOLDERING,** plugs into rear expansion port between ZX and Ram Pack, Printer or Microdrives.
- ★ **TWO JOYSTICKS** connect via one interface module.
- ★ **NO SPECIAL PROGRAMMING,** Joystick 1 operates as keys 5 to 8 through inkey instruction.
- ★ **IMMEDIATELY COMPATIBLE WITH ALL CURRENT SOFTWARE** using arrow keys for movement.
- ★ **INTEGRAL 'FIRE' BUTTON**
  FREE 'Video Graffiti' listing + full instructions.

Send ADDRESS and CWO to:
A.G.F. HARDWARE, Dept YC.,
26 Van Gogh Place, Bognor Regis, West Sussex PO22 9BY

QTY	ITEM	ITEM PRICE	TOTAL
	JOYSTICK	6.99	
	INTERFACE MODULE	15.96	
ZX Spectrum ☐ ZX81 ☐ Please tick		FINAL TOTAL	

Fed up with Space Invaders?
Fed up with moving N.S.E.W. in seemingly endless Adventure games?

—then why not try our exciting range of challenging *war games* for the *SPECTRUM/16K ZX81/DRAGON 32*

1. PRIVATEER.
A brand new action-packed battle game for the 16K ZX81. How many enemy ships can you sink. Will you be promoted to Admiral or discharged from the service?

2. TYRANT OF ATHENS.
Can you survive long enough to turn Athens into the most feared state in the Mediterranean? Train troops, build warships, fight battles by land and sea against hostile Greek States and the vast Persian Empire. Many more features in this very addictive game.
Price: DRAGON £6.95 ZX81 £4.50 SPECTRUM £5.50

3. ROMAN EMPIRE.
Your aim is to conquer the hostile countries surrounding Rome. Build armies, appoint Generals and fight campaigns. This challenging game takes full account of morale, fighting efficiencies, leadership ability, etc. 3 levels of play.
Price: ZX81 £4.50 Spectrum £5.50

4. PELOPONNESIAN WAR.
Set in Ancient Greece from 431-404 BC, covering the Great War between Athens and Sparta. Your goal is a final victory over the Spartans but you will need all your skill in a combination of diplomacy and military force before you even stand a chance. 3 levels of play.
Price ZX81 only £4.50

5. SAMURAI WARRIOR.
How would you have fared as a Samurai in 13th Century Japan? Face challenges from Samurai and bandits. Are you a survivor? Or will you be forced to commit ritual suicide? 7 levels of play, a most fascinating game.
Price: DRAGON £6.95 ZX81 £4.50 Spectrum £5.50

6. WARLORD.
A challenging game of analytical skill set in 13th century Japan. You control a village and must meet attacks form other armies, combat challenges from other warlords and their Samurai, attack and defeat pirates, make raids for gold or slaves and feed your village.
Price: ZXX81 £4.50. Dragon £6.95

Cheques and POs please, made payable to M. C. LOTHLORIEN
Dept. YC2, 4 Granby Road, Cheadle Hulme, Cheadle, Cheshire SK8 6LS

SOFTWARE HOUSES, WHOLESALERS, DEALERS

YES. WE MANUFACTURE CASSETTES

DUPLICATING – Need 50 – 50,000 Program Copies within 10 days?

Short-run in-cassette copying, high-speed volume duplicating, with on-cassette body printing, labelling, over-wrapping, blister-carding etc. And YES – we verify our work – methodically.

BLANKS – Need any length blank cassette for copying or re-sale?

We manufacture tapes in bulk, with or without boxes, as well as our own fully-packaged standard length products.

We use high quality batch certified HM-1260 tape, for error-free copies.

Please ring or write to Nigel Boyle today for full details – all enquiries and material treated in the strictest confidence.

Phone
01 223 5955

Write to
BIBI Magnetics yc
Freepost
London SW11 2BR

BiBi Magnetics Limited,
101/105 Plough Road, London, SW11 2BJ

PRICE BREAK-THROUGH ON EXTRA MEMORY FOR ZX81 !

The **NEW** EconoTech 16K RAM PACK

adds 16-times more memory to your ZX81 at a budget price!

Fully assembled, tested and guaranteed - neat and compact. fits snugly to eliminate wobble. Compatable with ZX Printer.

ONLY £19.95 !
plus £1.50 post & packing to anywhere in the world

Full refund if not fully satisfied - simply return within 14 days of purchase. Allow up to 28 days for delivery. Fill in the coupon below and send with cheque or P.O.

To:
EconoTech, 30 Brockenhurst Way, London SW16 4UD
Please send me .... 16K RAM Packs @ £19.95 each, plus £1.50 post and packing.

Name .....

Address .....

.....

.....

BBC A LA MODE

If you have ever wondered how Munchymen, Space Invaders and their ilk make it on to the small screen Fintan Culwin lifts the veil of mystery surrounding their genesis. Discover how to conjure up similar effects on mode 5 screens.

IF YOU HAVE seen the advertising leaflets, or even been lucky enough to see the games produced by companies like Acornsoft, you will probably have been impressed at the quality of the multicoloured figures used in the graphics. Just as impressive is the speed with which the figures are plotted on to and off the screen.

The most obvious way to reproduce these figures would be to use a combination of Plot and GCol commands. Plot commands in the range 64-71 will allow plotting of single pixels. The GCol commands enable changing of the Plotted colour.

Even with the speed of BBC Basic this method is not fast enough for games applications and consumes a prodigious amount of memory, even for a small figure. The use of assembly routines to do the equivalent, passing the commands and values to the machine-operating system — MOS — via the Oswrch routine does not significantly increase the speed, although it consumes less memory. This is not a failing of the assembler, but a reflection of the efficiency of the Basic interpreter which also uses Oswrch.

An alternative solution to the problem is to use the user-definable characters. By carefully designing pairs of these characters and by using 'Or' plotting, all four colours can be produced on the screen within the confines of a single-character cell.

The best way of passing all this information to the screen is to assemble a string containing both the characters to be plotted and the control characters — see *User Guide* page 377. An example of this is given in listing 1.

The listing creates four user-defined characters which are Ored together on the screen to give the three displayed colours. The first two characters are plotted onto the screen in colour 1. The second two characters are overlayed on top of the first two in colour 2. By Oring colour 2 on top of colour 1, any pixels that are turned on in both colours are displayed in colour 3. All of this information is contained in the S string which can be interpreted as

GCOL 0 1, PRINT CHR$(225) CHR$(225) : backspace : backspace : GCOL 1 2 : PRINT CHR$(226);(227)

The D string is similar using character 255 to overprint the figure in the background colour.

This again uses vast amounts of memory and is limited to the speed of Basic, or, via Oswrch, the MOS. It has the added disadvantage that there is no easy way of realistically exploding or assembling the figure out of hyperspace.

The one advantage of both these methods is that they will work on the other side of the Tube — when the second processor becomes widely available.

I will now show two ways of controlling screen memory directly to produce a figure identical to that produced by listing 1. I will only be describing how to use mode 5 although similar considerations apply to other multicoloured modes.

In order to understand how to control screen memory directly, it is necessary to investigate the way the colour information is coded. The mode 5 screen has a resolution of 160 by 256 pixels, controlled by a 10K block of memory from &5800 in a 32K machine, &1800 in a 16K machine. Simple arithmetic shows that each byte controls four pixels. These are arranged from Himem upwards as blocks of eight bytes controlling what would be a character cell of a 40 by 32 character screen. The first eight bytes control the character cell in the top left-hand corner; the next eight, the cell beside it — and so on.

As each byte controls four pixels, all four pixels have to be accounted for when deciding which value to set the byte to. Each pixel has an ordinal value and a colour scaling value.

(continued on page 95)

```
100  MODE5
110  VDU 19,2,4,0,0,0
120  FOR X%=&5E40 TO &5F40 STEP 8
130      !X%=&070E0C08:!(X%+4)=&10303007
140      !(X%+8)=0:!(X%+12)=&A5D2A55A
150      !(X%+16)=0:!(X%+20)=&A55AA55A
160     !(X%+24)=0:!(X%+28)=&EEFFEECC
170      FOR N=0 TO 100:NEXT
180     FORD%=0 TO 28 STEP 4
190      !(X%+D%)=0
200       NEXT:NEXT
210  GOTO 120
```

Listing 2.

```
 99 REM LISTING1
100 PROCINITIALISE
110 MODE5
120 VDU 19,2,4,0,0,0
130 VDU5
140 FOR X%=0 TO 1216
STEP 32
150 MOVE X%,640:PRINT
T$;
160 FORN=0TO30:NEXT
170 PRINTD$
180 NEXT
190 GOTO 140
1000 DEFPROCINITIALISE
1010 VDU 23,224,&80,&C0,
&E0,&70,&7A,&05,&02,&05
1020 VDU 23,225,&00,&00,
&00,&00,&AC,&5E,&AF,&5E
1030 VDU 23,226,&00,&00,
&00,&00,&05,&3A,&3D,&1A
1040 VDU 23,227,&00,&00,
&00,&00,&5C,&AE,&5F,&AE
1050 VDU 23,255,&FF,&FF,
&FF,&FF,&FF,&FF,&FF,&FF
1060 T$=CHR$(18)+CHR$(0)
+CHR$(1)+CHR$(224)+CHR$
(225)+CHR$(8)+CHR$(8)+
CHR$(18)+CHR$(1)+CHR$
(2)+CHR$(226)+CHR$(227)
1070 D$=CHR$(8)+CHR$(8)
+CHR$(18)+CHR$(0)+CHR$
(0)+CHR$(255)+CHR$(255)
1080 ENDPROC
```

Listing 1.

NEW

INSTANT IMAGE TRANSFER TO ZX SPECTRUM

RD DIGITAL TRACER £49.95



(unretouched printouts)

The high resolution colour graphics of The ZX Spectrum permit accurate presentation of complex or irregular images – maps, technical drawings, even personalities. But entering individual co-ordinates for unusual shapes can be tedious and time-consuming.

The new RD DIGITAL TRACER cuts out much tedious plotting. It provides instant transfer from original to display file – for screen display in colour, ZX printer printout, or retention on cassette.

The RD DIGITAL TRACER is of immense benefit in many fields – for geographers and weathermen, for engineers, architects and technicians, even for budding Leonardos! Designed for use with the ZX Spectrum, the RD DIGITAL TRACER as supplied is compatible with ZX 81, although high-resolution colour graphics cannot be obtained on this machine.

The RD DIGITAL TRACER is available only from RD Laboratories. The price of £49.95 includes P & P and VAT. Send your cheque now for delivery in 28 days. (Cheques payable to "RD Laboratories".) The RD DIGITAL TRACER is supplied with tracing sheet, software cassette, and full instructions on use.

Please send me ..... RD DIGITAL TRACER(S) at £49.95 each. I enclose payment of £ _____ . _____

Name: .....

Address: .....

.....

Send to: RD Laboratories, Dept. YCF, 5 Kennedy Road, Dane End, Ware, Herts. SG12 OLU

RD Laboratories' policy is to bring sophisticated computer techniques to low-cost computing. RD Laboratories therefore maintain the right to amend specifications at short notice. Please send stamp for further details of the RD DIGITAL TRACER, and the RD 8100 SYSTEM for automatic monitoring, test and control.

R D Laboratories

5 Kennedy Road, Dane End, Ware, Herts. SG12 OLU
(0920) 84380

NEW... BIGGER... BETTER...

BUFFER MICRO SHOP

We are **MOVING** *100m up the road to:*
310 Streatham High Road
London SW16

★ ★ ★ ★ ★

The World's oldest Sinclair orientated software shop packed with goodies for

ZX81 & SPECTRUM

★ ★ ★ ★ ★

Open 10.30 to 5.30 Tues. to Sats. (closed Mons.)

★ ★ ★ ★ ★

Please send large SAE for catalogues and indicate for which computer

Telephoned Orders (Access or Visa Cards) on:
01-769 2887
Please make cheques payable to
BUFFER MICRO LTD

QCP-FORTH!

***FULL FIG-79 STANDARD (NON-DISK)**
***FASTER THAN BASIC**
***EASIER THAN MACHINE CODE**
***SUPPORTS ZX-PRINTER**

Forth, for those who are not already converts, is perhaps the closest yet to the ultimate all-purpose computer language. It is designed to be fast, portable and *extremely* flexible. A FORTH program consists, largely, of definitions of new FORTH words, enabling a user to develop a unique, application oriented, vocabulary. It is even possible to alter the syntax to suit your application (or just your style of program!).

***TAPE & DOCUMENTATION . . . £10**

GAMES PACKS 1&2
Pack 1 includes: Space Torpedo, Reverse, M/C Life and more.
Pack 2 includes: Robot chase, Nim, Music, Mini Adventure etc.

UTILITIES PACK
Enhance your BASIC Programs with this set of useful machine code routines.

GAMES PACKS . . . £6 each

UTILITY PACK . . . £5

*****COMING SOON*****

PILOT: the educational language

ALL PRICES INCLUDE VAT & P&P
QUALITY STACKABLE CASSETTES

Quasar Computational Paraphernalia SOFTWARE

11c HERCIES ROAD · UXBRIDGE · MIDDLESEX

(continued from page 93)

This is my own terminology to avoid confusion with the user guide. The ordinal values of the pixels are, from left to right, 8,4,2,1. The colour-scaling values are 0 for logical colour 0, 1 for logical colour 1, 16 for colour 3 and 17 for colour 3.

Each pixel is set by multiplying its ordinal value by the chosen colour-scaling value. The results of all four pixels are added together to give a number in the range 0 to 255 which when sent to the screen will give the required result.

Two examples should make this a little clearer. Suppose we want to switch on the four pixels in the colour sequence 3,2,1,0 ; the calculation is

$(8 \times 17) + (4 \times 16) + (2 \times 1) + (1 \times 0) = 202$

or the converse sequence 0,1,2,3

$(8 \times 0) + (4 \times 1) + (2 \times 16) + (1 \times 17) = 37$

To verify this, put your machine into mode 5 and Poke locations &5E80 and &5E90 with the calculated values. There remain the problems of defining the figure on a grid, calculating the values and sending these values to the screen.

Listing 2 uses the Basic indirection operator "!" — Pling. This is similar to the Poke operator which sets one byte of memory; Pling sets four sequential bytes.

The way that Pling works is initially confusing. If the four bytes that you wish to set are — not hex — A1 B2 C3 P4, then the number that should be Plinged is — in hex — &D4C3B2A1. If you stick to hex then apart from the value of the zero, there are always eight digits in the number to be Plinged.

Listing 3 gives the same figure, but this time the data is sent to screen memory via a machine-code routine. I will not explain the way the machine code does this, but will just give the relative timings it takes for each of the routines to send the figure across the screen one hundred times:

LISTING 1	388secs
LISTING 2	65secs
LISTING 3	1.6secs

The other disadvantage of addressing screen memory directly should now be obvious. The codes as presented will only produce figures in the defined character positions, not as the first two methods will allow at any place on the screen. I do not think that for most uses this is a significant restriction. The advantage that these methods do have is that the figures can be assembled or exploded in a most spectacular manner. ■

```
100  PROCASSEMBLE
110  MODE5
120  VDU 19,2,4,0,0,0
130  REM
140  CALL pass
150  GOTO 140
250 DEFPROCASSEMBLE
260  DIM D% 35
270 DIM T% 255
280  FOR U%=D% TO D%+28
     STEP 4
290   READ V%:!U%=V%:NEXT
300 FOR opt =0 TO 2 STEP 2
310  P%=T%
320  [OPT opt
330   .pass LDA £&40
340  STA &70
350  LDA £&5E
360  STA &71
370   LDA £&1E
380  STA &72
390   .move JSR plane
400  JSR del
410  JSR clear
420  JSR inc
430  DEC &72
440   BNE move
450  RTS
460   .plane LDY £&1F
470   .bit LDA D%,Y
480   STA (&70),Y
490   DEY
500   BPL bit
510   RTS
520  .clear LDY £&1F
530  .biu LDA £0
540  STA (&70),Y
550  DEY
560  BPL biu
570  RTS
580  .inc CLC
590  CLD
600  LDA &70
610  ADC £8
620  STA &70
630  LDA &71
640  ADC £0
650  STA &71
660  RTS
670  .del LDX £&BF
680   .loop1 NOP
690  LDY £&FF
700   .loop2 DEY
710  BNE loop2
720  DEX
730  BNE loop1
740  RTS
750  ]
760   NEXT
770 ENDPROC
850 DATA &070E0C08,
    &10303007
860 DATA 0,&A5D2A55A
870 DATA 0,&A55AA55A
880 DATA 0,&EEFFEECC
```

Listing 3.

*******SPECTRUM AND ZX81 SOFTWARE*******

from CP SOFTWARE

*******SUPERCHESS*******

*Play against the most powerful ZX chess program. *10 levels of play *choice of positional or tactical evaluation *substantial book of openings eg. French Defense, Sicilian, Ruy Lopex, Queen's Gambit *high quality display with hi res. pieces & board, list of moves, playing level. Many more features too *self-play *recommended move *analyse. Each cassette comes with full instructions.*
16K ZX81 £6.95 ..... 48K SPECTRUM £7.95

*******ZX DRAUGHTS*******

Did you know that a computer draughts program has beaten the world draughts champion? Draughts is an ideal game to apply tree searching techniques to. Our program analyses each position in depth, making it a formidable opponent. Choice of colour, 9 levels of play, at level 5 (response time 20 seconds) it beats its own programmer!
16K ZX81 £6.95 ..... 48K SPECTRUM £7.95

*******BACKGAMMON*******

Play this fascinating game of skill and chance. High resolution colour display, with dice roll. Can be used by expert players and also has documentation to enable beginners to learn the game.
48K SPECTRUM £6.95

*******SPECTRUM SPEECH*******

Yes it's possible! Software driven speech from the Spectrum. Simple to use in your own programs. Each cassette comes with user documenation and demonstration program. No extra hardware is required, uses Spectrum speaker and top 32K ram. SOFTALK 1 "Multiwords" 60+ words (0 to 1 million, plus, add, go, limit, right etc.)
SOFTALK 2 "Spacegames" 60+ words (numbers, red, alert, damage, fire, torpedoes, bearing, south etc.)
48K SPECTRUM ..... £6.95 each

*******SPECTRUM ASSEMBLER*******

An essential aid for m/c programmers. User documentation supplied with each cassette.
16K and 48K SPECTRUM £4.95

All prices are inclusive. Dispatch within 48 hours of receipt of order. Send cheque or postal order (and state whether ZX81 or SPECTRUM to:

CP SOFTWARE

(DEPT. YC)
17 Orchard Lane, Prestwood, Great Missenden, Bucks. HP16 0NN

SOUND with SINCLAIR

MAKE AMAZING SOUND EFFECTS WITH YOUR ZX 81, TIMEX Sinclair 1000 or SPECTRUM



THE ZON X

£25.95
incl p&p & VAT.

★ The ZON X SOUND UNIT is completely self-contained and especially designed for use with the ZX 81, TIMEX Sinclair 1000 and Spectrum Computers. It just plugs in — no dismantling or soldering.

★ No power packs, batteries, leads or other extras.*

★ Manual Volume Control on panel — ample volume from built-in loudspeaker.

★ Standard Sinclair — 16K Rampack or printer can be plugged into ZON X Sound Unit without affecting normal computer operation.

★ Huge range of possible sounds for Games, Music, Helicopters, Sci-Fi, Space Invaders, Explosions, Gun-shots, Drums, Planes, Lasers, Organs, Bells, Tunes, Chords, etc., or whatever you devise!

★ 8 full octaves. Uses 3-Channel sound chip giving programme control of pitch, volume of tones and noises, all with envelope control.

★ Easily added to existing games or programmes using a few simple "BASIC" lines or machine code.

★ No memory addresses used — I.O. mapped.

FULL instructions with many examples of how to obtain effects and the programmes, supplied, fully guaranteed. British Made.

**Except with Spectrum, you need the Spectrum Extension Board Order No. SE1 — Price £6.80 incl. V.A.T.*

Payment may be made by Cheque, P.O., Giro No. 388 7006, Postal Order or Credit Card.

Export orders :— Bank Cheque, International Money Order, U.S. $ or £ Sterling.

BI-PAK Dept YC2, P.O. Box 6, 63A, High Street, Ware, Herts.

Access & VISA accepted. Ring 0920 3182 for immediate despatch

MEMOPAK 16K For those just setting out on the road to real computing, this pack transforms the ZX81 from a toy to a powerful computer. Data storage, extended programming and complex displays become feasible.
For even greater capacity, memory packs can be added together (16 + 16 + 16K or 16 + 32K). The MEMOPAK 32K and the MEMOPAK 64K offer large memories at economical prices.

MEMOTECH

The Memotech approach to microcomputing is to take the well-proven and popular ZX81 as the heart of a modular system. This small computer houses the powerful Z80A processing unit and acts as the central processor module through which the MEMOPAKS operate.

Memotech has a reputation for professional quality, producing units which are designed to fit perfectly, to look well-balanced, and to work efficiently and reliably.

The modular approach gives ZX81 owners the freedom to design the system they really need. Furthermore, the intercompatibility of the modules ensures that later additions will click straight in, to give you a system that grows with your ambitions and abilities.

As one example, a system with 16K of memory and MEMOCALC is all that is required to perform sophisticated numerical calculations giving the same results as a computer at 10 times the price. The problem may be as complicated as a cash flow or production schedule, or as simple as household accounts or pocket money budgeting. If the bank manager wants to see the cash flow, then a single print instruction to the Centronics I/F will give a printout which is more than acceptable to any bank.

The example system which is shown, on the other hand, would satisfy the needs of someone who wanted to enter data via a light-touch keyboard, construct and label graphs, and then copy the screen to an 80-column printer. Only 16K of memory is used here but with additional memory, more than one video page can be stored. Up to 7 successive pages can be displayed cyclicly to give animated displays.

MEMOCALC The screen display behaves as a 'window' on a large sheet of paper on which a table of numbers is laid out. The maximum size of the table is determined by the memory capacity, and with a MEMOPAK 64K a table of up to 7000 numbers with up to 250 rows or 99 columns can be specified. Each location in the table can be either a number which is keyed in or a formula which generates a number. Every time the command to 'calculate' is given, all the formulae in the table are re-evaluated. Spreadsheet analysis started as an aid to cash-flow analysis, but this powerful tool has now been generalised and MEMOCALC with its special ability to perform iterative calculations is invaluable in the performance of numerical tasks.

16K	£26.00 +	£3.90	VAT	£29.90
32K	£43.43 +	£6.52	VAT	£49.95
64K	£68.70 +	£10.30	VAT	£79.00
HRG	£34.70 +	£5.20	VAT	£39.90
CI/F	£34.70 +	£5.20	VAT	£39.90
MEMOCALC	£26.00 +	£3.90	VAT	£29.90
Z80 ASSEMBLER	£26.00 +	£3.90	VAT	£29.90
KEYBOARD WITH BUFFER	£43.43 +	£6.52	VAT	£49.95

Memotech products are available at larger branches of WHSMITH



MEMOPAK HRG This pack breaks down the constraints imposed by operating at the ZX81 character level and allows high definition displays to be generated. All 248 × 192 individual pixels can be controlled using simple commands, and the built in software enables the user to work interactively at the dot, line, character, block and page levels. Scrolling, flashing and animation are all here.

MEMOPAK Centronics I/F The BASIC commands LPRINT, LLIST and COPY are used to print on any CENTRONICS type printer. All ASCII characters are generated and translation takes place automatically within the pack. Reverse capitals give lower case. Additional facilities allow high resolution printing. The full capabilities of your printer are now under the control of the ZX81.

REALISES THE ZX81 POTENTIAL

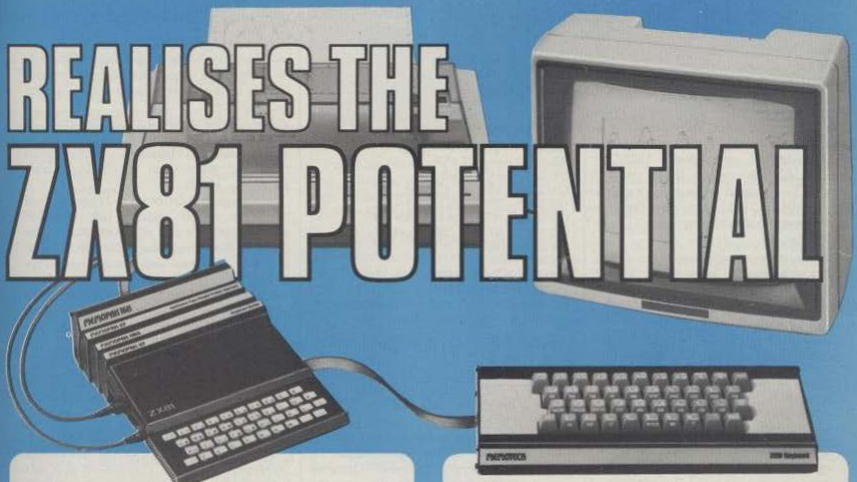

MEMOPAK Z80 Assembler This click-in EPROM based pack accepts standard Z80 assembly language mnemonics to allow you to write faster and more compact programs. It has its own ADD, EDIT, LIST, ASSM and QUIT functions, the editor allowing insertion, deletion, automatic line renumbering and error checking. Source code and object code listings can be displayed and printed in decimal or hex format.

MEMOTECH Keyboard The light-touch positive stop keys of this elegant typewriter-pitch keyboard allow you to work faster, more accurately and more confidently. To speed you along we have added an extra SHIFT key to the array at top right. The keyboard is attached by a cable to the Keyboard Buffer which fits in amongst your other Memopaks or straight onto the back of your ZX81.

To ensure that your expectations are realised, care is taken at every stage to design features into the system to anticipate your frustrations and to forestall them. For example:
A) Memories are cumulative e.g. 16K and 32K can be added to the MEMOPAK 16K or even to the Sinclair 16K RAM pack.
B) The HRG firmware allows commonly used constructions (such as scrolling, shading and labelling graphs), which might otherwise be beyond the user's programming capabilities, to be evoked by a few simple commands.
C) The Centronics I/F converts ZX81 character codes into ASCII and extends the print line to the width of the printer, still using the LLIST, LPRINT and COPY commands.

Looking forward, Memotech will continue to back the ZX81 through 1983 with fast storage devices, pressure sensitive electronic drawing boards and more software packs including a wordprocessor and an RS232 interface.

MEMOPAKS may be ordered by post (cheque, Access/Barclaycard quoting number) or by telephone. Please make cheques payable to Memotech Ltd. and please include £2.00 per unit for packaging and postage inland (overseas £3.00).

We want to be sure you are satisfied with your Memopak – so we offer a 14-day money back guarantee on all our products.

MEMOTECH

MEMOTECH LIMITED, WITNEY, OXON. OX8 6BX
TELEPHONE (0993) 2977 TELEX 83372 MEMTEC G

ZX CHARA

A DISPLAY of the character set of the ZX Spectrum obtained using the three lines of Basic

```
10 FOR x=255 TO 32 STEP -1
15 PRINT CHR$ x;
25 NEXT x
```

is shown in figure 1. From the character set summary in the Sinclair manual it may be noted that each character is assigned a unique code in the range 0 to 255. However some codes are not used, and others are used as control characters. There are only 224 characters that can be displayed on the screen, — codes 32 to 255 inclusive — see range of x values in line 10 of the program.

The characters having codes in the range 32 to 127 inclusive, are stored in a block of read only memory — ROM — between memory addresses 15616 to 16383 inclusive. Each character is defined by the contents of eight successive memory bytes.

The space character — code 32 — is stored in the eight bytes in the address range 15616 to 15623, and successive codes are correspondingly stored in successive blocks of eight bytes. The eight bytes of any of these characters are stored in memory ranging from address 15616 + (8*(code-32)) to address 15632 + (8*(code-32)). For example, the + character — code 43 — is stored in the memory address range 15704 to 15711. You may Peek into these memory locations using

```
10 FOR x=0 to 7
15 PRINT PEEK (15704+x)
20 NEXT x
25 STOP
```

to obtain a display of the contents of each memory location. The values are

Memory address	Displayed contents decimal	Memory contents binary
15704	0	00000000
15705	0	00000000
15706	8	00001000
15707	8	00001000
15708	62	00111110
15709	8	00001000
15710	8	00001000
15711	0	00000000

When the ZX Spectrum displays this + character it interprets the bit pattern such that 0 is paper and 1 in ink, and it is displayed using an eight-by-eight picture-element — pixel — grid, as shown in figure 2.

Program 1 listed below may be used to display, for an inputted character code, the eight-by-eight bit character definition and the pixel grid definition boosted by a factor of 64.

```
 2 BORDER 4
 4 PAPER 6
 5 INPUT code
12 PRINT AT 5,6; "The character is ";CHR$
   code
25 FOR x=1 TO 8
30 LET j=15615+8*(code -32) +x
32 LET g=PEEK j
40 GO SUB 150
50 NEXT x
150 FOR n=1 TO 8
155 LET y=g/2
165 LET r=g-(INT y*2)
175 LET a$=CHR$ (48+r)
177 PRINT AT 7+x, 12-n;a$
178 IF a$="0" THEN LET a$=" "
179 IF a$="1" THEN LET a$="■"
180 PRINT AT 7+x, 28 - n;a$
185 LET g=INT y
195 NEXT n
200 IF x=8 THEN PAPER 4
210 IF x=8 THEN STOP
225 RETURN
```

Program 1.

Character codes used with program 1 must be in the range 32 to 127. For example, when code 127 is inputted, the eight-by-eight binary bit pattern and corresponding eight-by-eight pixel grid definition, magnified by a factor of 64, for the © character is displayed, figure 3.

Program 1 may be modified so that you can obtain a display of the eight-by-eight bit pattern and pixel-grid definition of a character entered via the keyboard. In this case the keyboard-entered character is converted to the corresponding code using the Inkey$ function. To do this you must change lines 5, 12 and 30 to

```
 5 IF INKEY$ = "" THEN GO TO 5
12 PRINT AT 5,6; "The character is "; Z$
30 LET j=15615+8*(CODE Z$-32)+X
```

and insert the additional lines of program

```
 3 PAUSE 10
10 LET Z$=INKEY$
```

With the modified form of the program you cannot input all the characters with codes in the range 32 to 127 inclusive. For example the) character — code 125 — is excluded. But the modified form of the program does allow you to enter most characters directly without looking up the character codes in the character set summary.

The characters stored in ROM cannot be changed, and therefore if you require to display additional characters, you may define them and store them in random access memory — RAM.

It is possible to define up to 21 user-defined characters which require 168 bytes of memory, and the area of RAM reserved for them has the address range 32600 to 32767 in the 16K Spectrum and the address range 65368 to 65535 in the 48K Spectrum.

The address of the first byte in memory of any of the user-defined graphic in characters may be determined by using the Usr function in the form

```
PRINT USR "user defined graphic symbol"
```

and the computer outputs to the screen the appropriate address. For example

```
PRINT USR "D"
```

outputs the address 32624 for the 16K Spectrum, and 65392 for the 48K Spectrum.

The area of RAM used for the user-defined characters is initialised, at switch-on, with data bytes which define the alphabetic characters A

Figure 2.

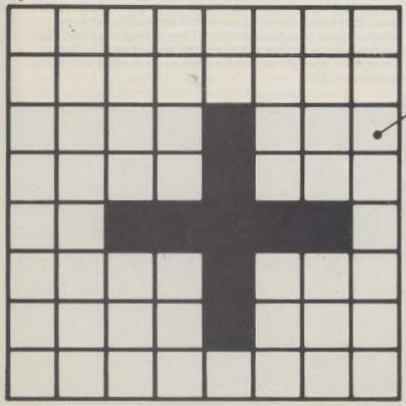

Figure 3.

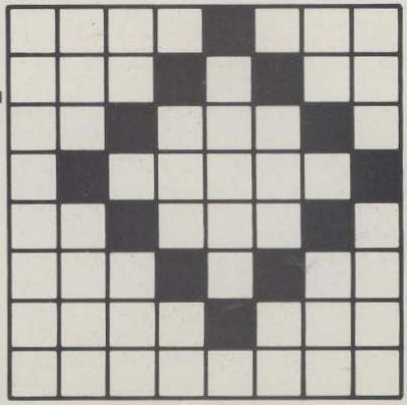

CTERS

Trevor Terrell and Robert Simpson provide character forming advice to help Spectrum users define their own graphics.

to U. The eight bytes of any of these characters are stored in the memory from address Addr+8*(code−144) to address Addr+7+8*(code−144), where code has a value in the range 144 to 164 corresponding to user-defined characters A to U respectively, as given in the character set summary. Addr is equal to 32600 for the 16K Spectrum and it is equal to 65368 for the 48K Spectrum.

For example, in the 16K Spectrum, if you examine the content of the eight bytes of memory with addresses from 32672 to 32679 inclusive, you will see that the J character in binary form as

Memory address	Memory contents
32672	00000000
32673	00000010
32674	00000010
32675	00000010
32676	01000010
32677	01000010
32678	00111100
32679	00000000

A simple way of proving this to yourself is to run Program 1 with line 30 changed to

30 LET j = 32599 + 8*(code−144) + x 16K

or

30 LET j = 65367 + 8*(code−144) + x 48K

shown in figure 3 you must first define the bit probably be of very little use to you because the same characters, A to U, exist as part of the character set stored in ROM. However, because the user-defined characters are stored in RAM you can generate your own character by writing the appropriate eight bytes into any of the 21 user-defined graphics memory areas. For example, to obtain a character of the form shown in figure 3 you must first define the bit pattern of each byte of the character. In this example we have

```
00001000
00010100
00100010
01000001
00100010
00010100
00001000
00000000
```

Let us assume that this character is to be identified as the user-defined character D, then we must store the above bytes in memory addresses Addr to Addr+7, where Addr is equal to 32624 for the 16K Spectrum and it is equal to 65392 for the 48K Spectrum. We can do this using

```
POKE Addr   , BIN 00001000
POKE Addr+1, BIN 00010100
   |     |     |     |
   |     |     |     |
   |     |     |     |
   |     |     |     |
POKE Addr+7, BIN 00000000
```

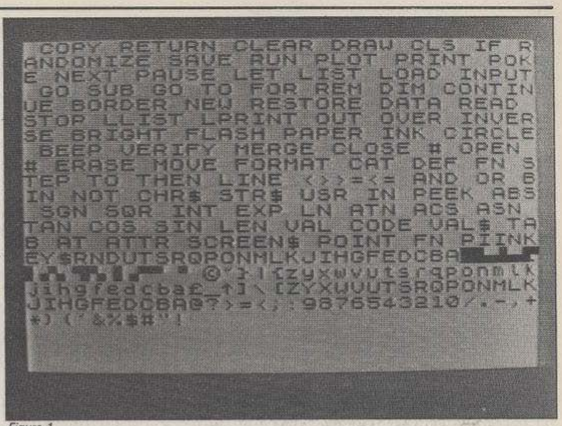

Figure 1.

To examine the binary bit pattern and pixel-grid definition of this defined character we may use program 1 with line 30 changed to

30 LET j = 32599 + 8*(code−144) + x16K Spectrum

or

30 LET j = 65367 + 8*(code−144) + x48K Spectrum

To include a user-defined graphic character in a Basic program you enter graphics mode and access the character by pressing the appropriate alphabetic symbol key A to U. For the above example to display the diamond character at the centre of the screen you enter

PRINT AT 10,15; "◇"

Where ◇ is obtained by putting the computer in graphics mode and pressing the D key. This character is used in the simple game shown in program 2, in which treasure has been randomly and invisibly buried in one character square of the screen display. The treasure is found by moving the character upwards or downwards by pressing the u or d key respectively, and left or right by pressing the L or R key, until the ◇ character is on the character square where the treasure has been buried. The number of moves taken to find the treasure is then displayed.

The eight-by-eight pixel grid pattern enables 2↑8↑8 (1.8446744E+19) different characters to be defined, however you can only have 21 user-defined characters. To create more characters you can use the Over 1 statement, which permits one character to overlay another character, but note that coincident inked pixels are written as Paper. ■

Program 2.

```
16K Spectrum
1 POKE 32624, BIN 00001000
2 POKE 32625, BIN 00010100
3 POKE 32626, BIN 00100010
4 POKE 32627, BIN 01000001
5 POKE 32628, BIN 00100010
6 POKE 32629, BIN 00010100
7 POKE 32630, BIN 00001000
8 POKE 32631, BIN 00000000
or
48K Spectrum
1 POKE 65392, BIN 00001000
2 POKE 65393, BIN 00010100
3 POKE 65394, BIN 00100010
4 POKE 65395, BIN 01000001
5 POKE 65396, BIN 00100010
6 POKE 65397, BIN 00010100
7 POKE 65398, BIN 00001000
8 POKE 65399, BIN 00000000
10 BORDER 5: PAPER 6: INK 0:
FLASH 0
12 LET n=0
14 CLS
25 LET r=INT (RND*20)
35 LET c=INT (RND*31)
45 LET x=INT (RND*20)
55 LET y=INT (RND*31)
60 IF x=r AND y=c THEN GO TO 45
65 PRINT AT x,y;"◇"
85 LET k$=INKEY$
90 IF k$="" THEN GO TO 85
91 IF NOT (k$="u" OR k$="d" OR
k$="l" OR k$="r") THEN GO TO 85
92 IF INKEY$<>"" THEN GO TO 92
93 PRINT AT x,y;" "
95 IF k$="u" THEN LET x=x−1
115 IF x<0 THEN LET x=0
125 IF k$="d" THEN LET x=x+1
135 IF x>20 THEN LET x=20
145 IF k$="l" THEN LET y=y−1
155 IF y<0 THEN LET y=0
165 IF k$="r" THEN LET y=y+1
175 IF y>31 THEN LET y=31
225 PRINT AT x,y; "◇"
235 IF x=r AND y=c THEN GO TO 350
240 LET n=n+1
250 PRINT AT 21,0; "Number of Moves
= ";n
260 GO TO 85
350 FOR g=10 TO 0 STEP −1
355 BEEP .1,g
365 NEXT g
370 FLASH 1: PAPER 4
375 CLS : PRINT AT 10,10;"WELL
DONE"
385 PRINT AT 12,3; "Treasure Found In
";n;" Moves"
390 PRINT AT 16,4; "Press Key G TO
Go Again"
400 PRINT AT 18,4; "Or Press Key S To
Stop"
420 IF NOT (INKEY$="G" OR
INKEY$="S") THEN GO TO 420
425 IF INKEY$="G" THEN GO TO 10
430 IF INKEY$="S" THEN STOP
```

FULL ZX-81 CHESS

Figure 3. Rem display.

```
4 REM          DISPLAY

17207          LD HL NN   33 67 67     (17219)
               LD DE NN   17 0  72     (18432)
               LD BC NN   1 205 0
               LDIR       237 176
               RET        201
17219   18432  128 8 169 183 173 118
               29 8 55 51 39 48 54 39 51 55 118
17236          30 8 53 53 53 53 53 53 53 53 118
               31 8 0 128 0 128 0 128 0 128 118
17258          32 8 128 0 128 0 128 0 128 0 118
               33 8 0 128 0 128 0 128 0 128 118
17280          34 8 128 0 128 0 128 0 128 0 118
               35 8 181 181 181 181 181 181 181
               181 118
17302          36 8 183 179 167 176 182 167 179
               183 118
               8 8 45 44 43 42 41 40 39 38 118
17324          8 8 8 8 8
17329   18542  LD BC NN    1 0 4
               CALL NN    205 245 8      (2293)
               LD HL NN   33 0 72
               LD B N     6 110
               PUSH BC    197
               PUSH HL    229
               LD A (HL)  126
               RST 16     215
               POP HL     225
               POP BC     193
               INC HL     35
               DJNZ       16 247
17349   18562

               LD HL NN   33 125 64       16509
               LD (NN) HL 34 41 64        16425
               JP NN      195 7 3
```

© Copyright David Horne 1983

Figure 4. Code map. See also page 102.

```
ALIST
17037  LD HL NN    33 70 64
(141)  INC (HL)    52
( 66)  LD A (HL)   126
       ADD L       133
       LD L A      111
       LD (HL) C   113
       RET         201
CHGMV
17143  LD HL NN    33 55 67
(247)  LD A (HL)   126
( 66)  ADD N       198 128
       LD(HL) A    119
       RET         201
PMOVE
17151  LD HL (NN)  42 7 64
(255)  LD A (DE)   26
( 66)  LD C A      79
       LD A (HL)   126
       LD(HL) N    54 0
       LD(DE) A    18
       LD B A      71
       RET         201
```

IF YOU HAVE followed the series of articles to date, you should have managed to produce a game which consisted of a chessboard and logic which restricts the possible moves to only those that are legal, providing two-player chess.

Examining the memory map of the game you may have noticed that a significant proportion of the code is used in creating the board, which is big by ZX-81 1K display standards. If some way could be found to use the display file saved on tape and a minimal file "to boot", then we would have enough space to write a short computer playing routine.

One further point should be explained. It is not possible to give a good opening or finish to the game because that would require slightly more code than we have available in the 1K game. We actually have only 672 bytes.

The game, therefore, starts off with the computer playing white and either the King's pawn or the Queen's pawn moved forward one position. The following describes the machine

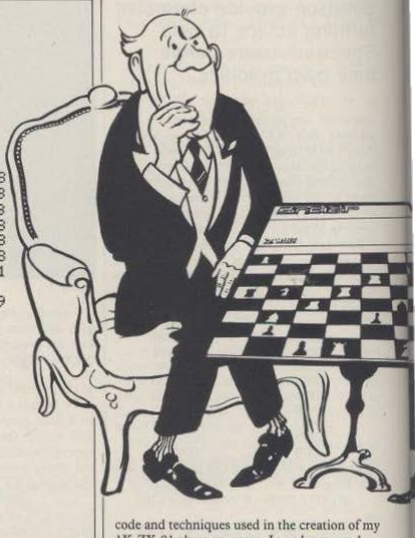

code and techniques used in the creation of my 1K ZX-81 chess program. In order to produce the code you will require a machine with at least 3K of memory. The code has been created using a 3K machine, there should be no problems using 16K if the procedures given are followed and RAMtop is lowered to 1K before loading from tape.

First the Basic program consists of:

Line	Function
1	A Rem statement. From address 16514 to 17186
2	A Slow statement. This has been called from Basic to ensure that all ZX-81s will work irrespective of whether you have an early ROM with error or not.
3	A Rand Usr statement. To call the machine-code routine.
4	A Rem statement. From address 17207 to 17362 to create the display and move itself above RAMtop.
10	onwards. Your favourite machine-code loader or this one.

```
10 FOR A = 16514 to 18000
11 SCROLL
12 PRINT A; TAB 8;
13 INPUT B
14 POKEA, B
15 PRINT PEEK A
NEXT A.
```

To explain the logic of 1-4 above, assume you have entered the machine code in Rems 1 and 4. Delete all Basic lines except 1 to 4 inclusive. Now lower RAMtop by typing:

```
POKE 16389,72
PRINT USR 1040
```

IN 1K

In the last part of this series, David Horne creates a new game by making enough space for a playing routine.

Run the machine-code program in Rem 4 by typing

```
RAND USR 17207.
```

This copies Rem 4 above RAMtop and it is therefore protected when the next commands are typed in. Delete line 4, then type Clear.

This removes all the stored variable making available the maximum possible RAM space for our program. Now add the variable X by typing:

```
LET X = 16959
```

This sets up the variable X for the Basic program. Line 3 Rand UsrX actually calls the driver routine. Now type:

```
RAND USR 18542
```

At this stage you save the program on tape. The machine-code program loaded above RAMtop will execute. The first section creates a display file on the board and pieces, the second section loads into address 16425 — Sinclair variable Nxtlin, the address of the next program line to be executed — this is the actual start of Rem 1, that is, address 16509.

The program then jumps to the Save routine in ROM; this will Save the display just produced and then auto-run at line 1. The whole of the above most be done in fast mode, or else the Save routine will not be executed.

Now for a brief description of the function of each of the machine-code segments: **Kybd** is a routine which sets up machine control of the keyboard such that only the eight key codes from code 29 and the eight key codes from code 38 are acceptable entries. Any other key depression is ignored. The subroutine **TKP** just scans the keyboard waiting for an appropriate key to be depressed. The alphanumeric entry is then translated to a board address.

STR: this routine takes the board address and determines whether the contents are: different from the current mover-colour; empty; the board surround or the same colour as the current mover.

Piece: this sets up pointers to possible move tables and number of steps and directions. **Move** produces a list of all legal moves available to the piece under consideration.

Pawn produces a list of all possible legal moves including initial double moves. **Check** locates current mover's Kings and stores the position in the attack register. **Square Attack** determines whether the opposition can attack the square in the attack register.

Score provides a move score based on the following: first, the "To" position results in taking of a piece. Second, the "From" position is attacked. Third, the "To" position is attacked. Fourth, "To" enables the computer to obtain a check and finally the "From" position is defended.

The current move score is then compared with the previous best and if this is superior, the move is saved as the best so far.

Shift moves the current move list to a safe

(continued on next page)

Figure 1. Basic program listing.

```
  1 REM FAST VAL LN ■"??"=C RVN
 LN ■F=■ ■T SCROLL ■ ■ ■
```

(continued from previous page)

position whilst Check is being evaluated, and then recovers the move list on completion. It is also used to shift the best move so far up into the move list.

PSC gives a score to a chess piece Q(5), R(4), B(3), N(2), P(1).

MPScan scans the board for computer pieces and, using move and score, determines all legal moves and saves the best. **INC** determines whether a square is being attacked.

Driver Main control logic, uses all the other subroutines to provide program control.

TestList: tests to see if there are any moves in the move list. **AddList:** adds to the current legal move list another entry on the end.

The program is copyright. You can produce a copy of the program from the listings for your own use, but you should not copy the listings or parts thereof and offer for sale. ■

Figure 4. Code map continued from page 100.

```
TKP
16514 PUSH HL   229
(130) PUSH BC   197
( 64) CALL NN   205 187 2
      LD B H    68
      LD C L    77
      LD D L    85
      INC D     20
      JP Z DIS  40 247
      CALL NN   205 189 7
      LD A (HL) 126
      POP BC    193
      PUSH BC   197
      CP C      185
      JP Z DIS  40 6
      INC C     12
      DJNZ DIS  16 250
      POP BC    193
      JR DIS    24 231
      POP BC    193
      POP HL    225
      LD(HL) A  119
      RET       201
KYBD

16544 LD BC NN  1 29 8
(160) CALL NN   205 130 64
( 64) DEC HL    43
      LD C N    14 38
      CALL NN   205 130 64
      INC HL    35
16557 LD A (HL) 126
      SUB N     214 28
      LD B A    71
      LD C N    14 11
      XOR A     175
      ADD C     129
      DJNZ DIS  16 253
      ADD N     198 97
      DEC HL    43
      SUB (HL)  150
MOVE
      LD A E    123
      ADD A (HL) 134
      PUSH AF   245
      PUSH HL   229
      PUSH BC   197
      CP N      254 63
      JP C DIS  56 30
      CP N      254 148
      JP NC DIS 48 26
      CALL STR  205 187 64
      CP N      254 2
      JP NC DIS 48 19
      PUSH AF   245
      CALL ALIST 205 141 66
      POP AF    241
      CP N      254 0
      JP Z DIS  40 10
      POP BC    193
      POP HL    225
      LD A C    121
      CP N      254 1
      JP Z DIS  40 5
      POP AF    241
      JR DIS    24 218
      POP BC    193
      POP HL    225
      POP AF    241
      INC HL    35
      DJNZ DIS  16 211
      RET       201
```

```
STR
16571 LD C A    79
(187) LD L A    185
( 64) LD H N    38 67
16575 LD A (HL) 126
(191) LD B N    6 1
( 64) AND N     230 127
      CP N      254 0
      JP Z DIS  40 20
      INC B     4
      CP N      254 118
      JP DIS    40 15
      CP N      254 39
      JP C DIS  56 11
      LD A (HL) 126          '0' DIFF
      INC B     4
      LD L N    46 55        '1' EMPTY
      ADD (HL)  134
      BIT 7,A   203 127      '2' WALL
      JP Z DIS  40 2
      LD B N    6 0          '3' SAME
      LD A B    120
      LD L C    185
      RET       201
TABLES
16607 1 11 -1 -11 -10 -12 12 10
16615 13 -13 21 -21 23 -23 -9 9
16623 11 10 12
16626 54 55 39 51 53
PIECE
16631 XOR A     175
(47) LD(HL) A   50 70 64
( 64) LD A (HL) 126
      AND N     230 127
      CP F      254 53
      JP Z DIS  40 79
      LD C N    14 1
      LD B N    6 8
      LD HL NN  33 231 64
      CP N      254 51
      JP Z DIS  40 22
      LD L N    46 223
      CP F      254 48
      JP Z DIS  40 16
      LD C B    72
      CP 4      254 54
      JP Z DIS  40 11
      LD B N    6 4
      CP K      254 55
      JP Z DIS  40 5
      LD L N    46 227
      CP P      254 39
      RET NZ    192
SHIFT
16882 LD HL NN  33 99 64
(242) LD DE NN  17 70 64
( 65) LD BC NN  1 28 0
      JP C DIS  56 1
      EX DE HL  235
      LDIR      237 176
      RET       201
PSC
17162 AND N     230 127
(10)  LD B N    6 5
(67)  CP (HL)   190
      RET Z     200
      INC HL    35
      DJNZ DIS  16 251
      LD A B    120
      RET       201
MPSCAN
17046 XOR A     175
(150) LD (NN) A 50 65 64
( 66) LD B N    6 86
      LD HL NN  33 62 67
      INC HL    35
      PUSH HL   229
      PUSH BC   197
      LD E L    93
      CALL STR2 205 191 64
      CP N      254 3
      JP NZ DIS 32 41
      LD L E    107
      LD (NN) HL 34 7 64
      CALL MOVE 205 247 64
      CALL TL   205 130 66
      JP Z DIS  40 29
      LD E A    95
      LD D N    22 67
      CALL PMOVE 205 255 66
      EXX       217
      AND A     167
      CALL SHIFT 205 242 65
      CALL CHK  205 1 66
      EXX       217
      LD(HL) B  112
      LD A C    121
      LD(DE) A  18
      JP C DIS  56 3
      CALL SCORE 205 153 65
      SCF       55
      CALL SHIFT 205 242 65
      JP DIS    24 222
      POP BC    193
      POP HL    225
      DJNZ DIS  16 200
      LD A (NN) 58 65 64
      CP N      254 0
      JP Z DIS  40 254
      LD HL NN  33 69 64
      LD A (HL) 126
      DEC HL    43
      DEC HL    43
      LD E (HL) 94
      LD D N    22 67
      LD (DE) A 18
      DEC HL    43
      LD L (HL) 110
      LD H D    98
17131 RIT 0,L   203 69
(235) LD(HL) N  54 0
( 66) JP Z DIS  40 2
      LD(HL) N  54 128
      CALL CHGMV 205 247 66
      RET       201
INC
17176 LD A L    125
(24)  EXX       217
(67)  LD(NN) A  50 128 64
      CALL SO.AT 205 16 66
      EXX       217
      LD A C    121
      RET       201
DRIVER
16959 LD B N    6 5
(63)  LD A N    62 8
(66)  LD HL NN  33 159 67
      INC HL    35
      LD(HL) A  119
      DJNZ DIS  16 252
      CALL KT   205 168 64
      CP N      254 3
      JP NZ DIS 32 238
      LD (NN) HL 34 7 64
      LD E L    93
      CALL MOVE 205 247 64
      LD HL NN  33 161 67
      CALL KT   205 168 64
      CP N      245 2
      EX DE HL  235
      JP NC DIS 48 228
      CALL TL   205 130 66
      JP Z DIS  40 215
      CP C      185
      JP NZ DIS 32 248
      CALL PMOVE 205 255 66
      EXX       217
      CALL CHK  205 1 66
      EXX       217
      JP C DIS  56 8
      CALL CHGSA 205 235 66
      CALL MPSCAN 205 150 66
      JP DIS    24 194
      LD (HL) B 112
      LD A C    121
      LD (DE) A 18
      JP DIS    24 249
TEST LIST
17026 LD HL NN  33 70 64
(130) DEC (HL)  53
( 66) LD A (HL) 126
      INC A     60
      RET Z     200
      ADD L     133
      LD L A    111
      LD A (HL) 126
      RET       201
```

```
PAWN
16721 LD A (HL) 126
(81)  AND N     230 128
(65)  LD HL NN  33 228 64
      JP NZ DIS 32 2
      LD L N    46 241
      LD D N    22 3
      LD A E    123
      ADD (HL)  134
      PUSH HL   229
      PUSH AF   245
      CP N      254 63
      JP C DIS  56 32
      CP N      254 148
      JP NC DIS 48 28
      CALL STR  205 187 64
      CP N      254 0
      JP Z DIS  40 28
      CP N      254 1
      JP NZ DIS 32 17
      LD A D    122
      CP N      254 1
      JP NZ DIS 32 12
      CALL ALIST 205 141 66
      LD A E    123
      CP N      254 82
      JP C DIS  56 19
      CP N      254 126
      JP NC DIS 48 15
      POP AF    241
      POP HL    225
      INC HL    43
      DEC D     21
      JP NZ DIS 32 210
      RET       201
      LD A D    122
      CP N      254 1
      CALL NZ ALIST 196 141 66
      JP DIS    24 241
      POP AF    241
      POP HL    225
      LD E A    95
      JP DIS    24 197
CHK
16897 LD A (NN) 58 55 67
( 1)  ADD N     198 48
(66)  LD HL NN  33 62 67
      LD B A    71
      CPIR      237 177
      DEC HL    43
      LD (NN) HL 34 128 64
SO.AT LD B N    6 86
16912 LD HL NN  33 62 67
(16)  INC HL    35
(66)  PUSH HL   229
      PUSH BC   197
      LD E L    93
      CALL STR2 205 191 64
      CP 0      254 0
      JP NZ DIS 32 25
      CALL CHEMV 205 247 66
      LD L E    107
      CALL MOVE 205 247 64
      CALL CHEMV 205 247 66
      CALL TL   205 130 66
      JP Z DIS  40 10
      LD HL(NN) 42 128 64
      CP L      189
      JP NZ DIS 32 245
      POP BC    193
      POP HL    225
      SCF       55
      RET       201
      POP BC    193
      POP HL    225
      DJNZ DIS  16 216
      AND A     167
      RET       201
SCORE
16793 PUSH HL   229
(153) PUSH BC   197
( 65) PUSH DE   213
      PUSH HL   229
      PUSH BC   197
      LD D L    85
      LD HL NN  33 64 64
      CALL NN   205 36 7
      CALL PSC  205 10 67
      LD A B    120
      ADD A N   132
      LD C A    79
      POP AF    241
      CALL PSC  205 10 67
      POP HL    225
      CALL INC  205 24 67
      JP NC DIS 48 1
      ADD A B   128
      LD C A    79
      POP HL    225
      POP DE    209
      LD E (HL) 94
      LD (HL) D 114
      PUSH HL   229
      PUSH DE   213
      CALL INC  205 24 67
      JP NC DIS 48 1
      SUB B     144
      PUSH AF   245
      CALL CHEMV 205 247 66
      CALL CHK  205 1 66
      POP BC    193
      JP NC DIS 48 2
      INC B     4
      INC B     4
      POP DE    209
      POP HL    225
      LD (HL) E 115
      POP HL    225
      CALL CHG  205 250 66
      CALL INC  205 24 67
      JP NC DIS 48 1
      DEC B     5
      CALL CHG  205 250 66
      CALL CHEMV 205 247 66
      LD A B    120
      LD HL NN  33 60 64
      LD (HL) A 119
      EX DE HL  235
      LD HL NN  33 65 64
      CP (HL)   190
      RET C     216
      LD BC NN  1 5 0
      JP DIS    24 11
```

© Copyright David Horne 1983

YOUR COMPUTER & ACORNSOFT

ANNOUNCE AN EXCITING NEW COMPETITION

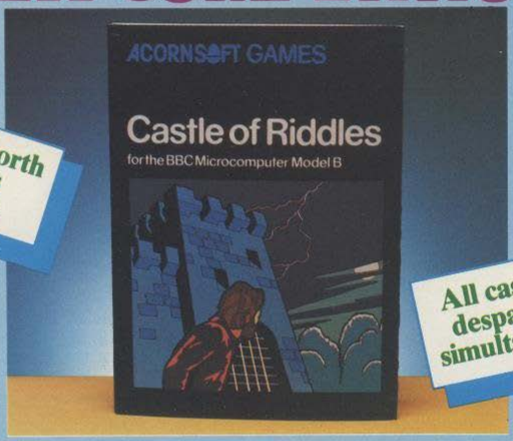

£3,000's worth of Prizes to be won

All cassettes despatched simultaneously

Your Computer in conjunction with Acornsoft announces an exciting competition with prizes worth over £3,000.

The Competition:

The competition is based around 'Castle of Riddles,' a new adventure game for the BBC Microcomputer 'B'. The cassette-based game is true to the adventure tradition with the additional hazard of having to solve six riddles on the journey to rescue the 'Ring of Power.' The 'Ring' belongs to an old wizard who hires you, as the adventurer, to rescue it from a local warlock who has stolen it.

Nerve Wracking and Exhilarating!

The game has a great deal of quirky humour in it and you'll be faced with lots of fiendishly new problems.

The game will stretch your nerves to their fullest extent, and your imagination will have to work overtime to cope. Initially the game will only be available by mail order.

Acornsoft, through their distribution house, Vector Marketing will hold all orders until February 15th. On that date cassettes will be despatched by post to all who have ordered them. The first correct entry to reach the Editor of *Your Computer* at Quadrant House, The Quadrant, Sutton, Surrey will win. We believe that this is the best way to give everyone an equal chance. The game will be available from dealers later on during February.

Sensational Prizes!!

The first prize is a magnificent £700 hallmarked silver ring-shaped trophy mounted on a presentation plinth and inscribed 'King of the Ring' together with £1,500 worth of Acorn hardware and Acornsoft software. The winner can choose from the complete range of Acorn products including computers, disc-drives, printer teletext, software etc. There are also prizes for the next two correct entrants. They will each receive £400 worth of Acorn/Acornsoft products of their own choice.

A Game for Intrepid Adventurers:

All correct entries received before the closing date of the competition March 31st, will win a printed two-colour metal badge!! It will be inscribed 'I have conquered the Castle of Riddles.'

'Castle of Riddles' costs just £9.95 inc VAT and is available from Department SBG17, Vector Marketing Ltd, Denington Estate, Wellingborough, Northamptonshire or telephone your credit order on (0223) 316039.

VIC-20 and PET INTERFACES

VIC-20 EXPANSION SYSTEM



* FOUR EXPANSION SLOTS
* TWO SLOTS WITH BLOCK SELECT FACILITY ALLOWS USE OF STANDARD RAM CARTRIDGES WITHOUT INTERNAL MODIFICATION
* FULLY BUFFERED
* GOLD PLATED EDGE CONNECTORS

PRICE 39.95

CONTROL INTERFACE

FOR USE ON BOTH VIC-20 AND PET. UNIT CONNECTS TO USER PORT, ALL LEADS SUPPLIED PRICE 39.95



* SIX RELAYS WITH RELAY ACTIVE LED'S
* RELAYS SINGLE POLE CHANGEOVER TYPE RATED AT 1A 28V DC or 0.5A 50V DC
* TWO EXTERNAL TRIGGER MONITORS FOR SENSING EXTERNAL SWITCHES ETC
* CAN BE USED ON OTHER COMPUTERS WITH USER I/O FACILITY AND 5 VOLT SUPPLY

VIC-20 ANALOGUE INTERFACE

PRICE 39.95 INCLUDES LEAD.



* 2 CHANNEL VOLTAGE MONITORING: 0 to 30 VOLTS DC 0 to 2 VOLTS MIN SENSITIVITY
* 2 EXTERNAL TRIGGERS FOR MONITORING EXTERNAL SWITCHES, RELAYS, ETC
* 2 CHANNEL PADDLE FACILITY ALLOWING USE OF UNIT AS PADDLES , X-Y POSITIONING ETC.

ALL PRICES FULLY INCLUSIVE
PLEASE ALLOW UP TO 28 DAYS FOR DELIVERY
CHEQUES/P.O. PAYABLE TO **CLOYVALE LTD**

CLOYVALE LTD

UNIT 5 POLT 1 INDUSTRIAL ESTATE
0983 854864 VENTNOR ISLE OF WIGHT PO38 1DX

NEW! ATOM NEW!

ALL ACTION PACKED M/CODE ARCADE GAMES

PROTECTOR £7

The most realistic version of this amazing Arcade game available for the Atom.. Defend your humanoids from mutation and destroy the Aliens in this hyper fast, action packed game.. Moving planetary surface, repeating waves and smart bombs, thrust, space, increasing Attack waves, 4 types of Aliens, Sound Effects, Top score and excellent mode 4 graphics are some of the features in this exciting game.

CENTIPEDE £6

The first and only version of this popular Arcade game for the Atom.. Shoot down the spitting centipede as it snaks through the mushroom field.. Also inhabiting the game are Spiders, Bugs and Snails.. The action increases until only skill and quick thinking can save you.. Excellent high speed mode 4 graphics, Sound Effects and Top score.





OMEGA MISSION £7

The first and only version of the superb Scramble Arcade game.. Moving landscape, fly over mountains, through caves and tunnels.. 5 different stages, Ground to Air Missiles, Fire Balls, Space Craft, Galaxits and the narrow twisting Tunnel.. Movement in 4 directions, Inertia, Excellent COLOUR graphics (plus Black & White on monochrome T.V.) mode 3a, Sound Effects, Top score.

PUCKMAN £5

One of the best versions of this popular Arcade man chasey game.. Eat all the dots in the maze but watch out for the hungry ghosts! Eat an Energy Blob and the chase reverses.. Each new stamed brings a new one with faster ghosts.. Excellent high speed mode 4 graphics, Sound Effects and Top score.



ALL 12K RAM

PRICES INCLUDE P&P. FAST 2 DAY DESPATCH!

micromania

14 LOWER HILL RD. EPSOM. SURREY.

campbell systems

THE VERY BEST IN MACHINE CODE FOR THE **ZXSPECTRUM** & **ZX81**

SPECTRUM 16K **GULPMAN** game of the '.....man' variety with 15 mazes, 4 chasers, laser defence, 9 grades, 9 speeds, demo mode, choice of joystick control. "An extraordinarily good program" raves Boris Allan for Popular Computing Weekly. We think you will agree. £5.95

SPECTRUM 48K **MASTERFILE** business/domestic filing and reporting system. So flexible that it is equally usable for your mailing lists, catalogues, stock control, text extracts ..... applications are endless. Fully user-defined data and report display formats, dynamic variable-length file, records and data items. Fully menu-driven with powerful search facilities, sorting, total/average, update, multiple independent files, printing. Yes, we aim to support microdrive when Uncle delivers. Nearly all the 8K we use is machine code, so you get 32K per file. Comes with example file and 22-page manual. £15.00

SPECTRUM 16K **SPDE** Disassembler and Editor, as used by other ZX professionals, and we used it to develop the above. £5.95

ZX81 16-48K **THE FAST ONE** is the predecessor to MASTERFILE and is in use all over the world now. Specification is very similar to MASTERFILE. £12.00

ZX81 16K **GULP 2** almost identical spec to GULPMAN. £4.75

All programs supplied double-recorded and mailed 1st class by return. Prices include VAT and postage within Europe. SAE for full list.

CAMPBELL SYSTEMS
(Dept. YC)
15 ROUS ROAD
BUCKHURST HILL
ESSEX IG9 6BL
ENGLAND 01-504-0589

BASIC DICTIONARY

This dictionary, compiled by Tony Edwards, will explain the function of common Basic words as used in popular machines, enabling you to work out your own machine's equivalent. A useful complement to our recent series on Basic dialect translation.

MOD A little-used function which returns the remainder when its two arguments — one in front and one behind — are divided.

MODE A statement used to select from the available screen formats available on some computers.

MOVE A statement which is used on the BBC Micro which moves the graphics pointer to the position specified by the argument. The same as Plot 4, argument, argument.

N

N. Used in TRS-80 level 1 and Palo Alto Tiny Basic as an abbreviation for NEW.

NE An alternative operator equivalent to <> not equal to. However it also stands as an abbreviation for NEW. The difference can be judged by the context of the line using it.

NEW A command or statement which effectively destroys any resident Basic program and returns to the command mode. It often also clears the screen.

NEX An abbreviation for the NEXT statement.

NEXT the statement used to return program execution to the preceding FOR statement and increment the counter. If the counter is out of the preset limit the execution continues with the line after the NEXT statement. An ANSI standard word. Some compilers allow an implied NEXT.

NORMAL The statement used on the Apple II to cancel the flashing and inverse video displays.

NOT A logical operator used as a negation in an IF statement. For example:

```
IF X = 0 AND Y NOT 0 THEN END
```

which terminates the program when X = 0 if Y is not also 0. Different computers handle the comparison of the arguments in different ways. See *Your Computer* August 1982, page 58 for an explanation of logical processes.

NOTRACE A command or statement which switches off the TRACE mode. Usually used within a program only during development.

NULL A statement which controls the number of null characters placed at the end of a line.

O

OLD A command which undoes the effect of a previous NEW statement or command.

ON ERROR GO TO A statement which allows a program to escape from a fatal error by ignoring the error and branching to the specified line number. The BBC Microcomputer equivalent is ON ERROR statement which allows statements other than the unconditional GOTO branch to be executed.

ON . . . G. The Microsoft Level 1 and Palo Alto Tiny Basic abbreviation for ON . . .GOTO.

ON . . . GOSUB A multiple branching statement of the form:

```
ON X GOSUB A, B, C . . . .
```

When encountered control is transferred to the Xth subroutine after GOSUB.

ON . . . GOT The PDP-8E abbreviation for ON . . . GOTO.

ON . . . GOTO A multiple-branching statement of the form:

```
ON X GOTO A, B, C . . . .
```

When encountered, control is transferred to the Xth line number after GOTO. An ANSI standard statement.

OPEN IN A function which returns the channel number of the file named, and opens it for input or updating.

OPEN OUT A function which returns the channel number of the file named and opens it — or creates it — for output or updating.

OPTION A standard ANSI word, but a little-used statement which assigns a value, usually 0 to 10 which becomes the number of the lowest array element. It is often followed by the word BASE.

OR A logical operator used in an IF statement.

```
IF X = 0 OR Y = 0 THEN END
```

terminates the run if either X or Y are 0. See *Your Computer* August, 1982, page 58, for an explanation of logical processes.

OUT The statement used to send a byte to a specified output port. Both byte value and port number should be integers between 0 and 256 — decimal.

P

P. A common abbreviation for PRINT used in TRS-80 level, Palo Alto Tiny Basic, Atom and BBC Microcomputer Basic. It is equivalent to "?".

P.A. The TRS-80 — level 1 — abbreviation for PRINT AT.

PAGE A pseudo-variable which controls the starting address of the current text area on the BBC Microcomputer. It is used to enable multiple programs to be stored simultaneously in RAM. It must always be equated to an integer multiple of 256.

PAUSE A statement used on ZX machines to halt processing for a specific period before continuing. It is the equivalent of the more common WAIT, and can be simulated with a dummy FOR-NEXT loop.

PDL A special function used in Apple II Basic to return the settings of paddles used as games controllers.

PEEK A statement which is used on many machines to return the value stored in a specified memory address from Basic.

PI A function which when called returns the decimal value of pi. It is usually set to return 3.14159265.

PIN A function which reads the decimal value of a byte of information available at a specified part. *See INP.*

PLOT A statement used in Apple II Basic to control the colour graphics block in a specified screen position. The same word is used on other machines for example, the BBC Microcomputer, to provide more extensive control over graphics features.

POINT A statement used on the TRS-80 to test a specified graphics block to see if it is switched on.

POKE The statement used on many machines to place some desired decimal value into a specified memory address. It cannot be used to load ROM area addresses but can alter memory contents in reserved RAM areas.

POS A function which returns the current horizontal position of the cursor on the screen. The left-hand position is usually numbered 0, not 1.

PR # An Apple II command which diverts output to the peripheral device indicated by the value of the argument.

PRI The PDP-8E abbreviation for PRINT.

PRINT A standard ANSI word. It is usable both as a command or a statement and causes output to be printed on to the screen.

PRINT # A statement or command which writes the output on to a peripheral device — often a cassette recorder — indicated by the argument.

PRINT AT A statement or command which causes output to appear at a specific location on the screen as indicated by the argument.

PRINT @ same as PRINT AT.

PRINT USING A statement which allows output to appear in a specific format. Different machines have different available formats. ■

The Cheapest Known Rampacks In The World

16K RAMPACK £19.75

64K RAMPACK £44.75

FULLY COMPATIBLE WITH ZX81 AND ALL ACCESSORIES – SIMPLY PLUG STRAIGHT INTO USER PORT AT REAR OF COMPUTER

- Fully cased tested and guaranteed
- Gold plated edge connector coated for extra long life
- Secure no wobble design
- Same sleek case size for both versions

PRICE INCLUDES VAT & P&P DELIVERY NORMALLY 14 DAYS

Send cheque/P.O. payable to:

CHEETAH MARKETING LTD.
4, Old Park Road Enfield Middlesex

IF YOU WANT:

*The Latest News on the BBC Micro
*Top Quality Programs
*Useful Hints and Tips
*Honest Reviews
*Independent Opinions
*Local User Group Information
*Members Special Offers

THEN YOU NEED:

LASERBUG

The Newsletter of the Independent National BBC Microcomputer User Group.
MEMBERSHIP: £12 for 1 year (£15 overseas) or send £1 and an A4 size SAE for a sample copy.

Write to:

LASERBUG, 10 Dawley Ride, Colnbrook, Slough, Berks., SL3 0QH

Members in 14 Countries Worldwide

Salamander Software

PRESENTS SOFTWARE FROM THE SOUTH.

DRAGON: TREK
A full version of this classic game, for the Dragon; features Faery Queen, hyperprobe, time travel, tractor beams and more! Includes a 16pp Flight manual. 1 Joystick required. £9.95

WIZARD WAR
The mighty mages of the Tri-suns strive for supremacy in a fearsome battle of skill and strategy! Joysticks required. Comes complete with 16 page Spell-book. £7.95

VULCAN NOUGHTS AND CROSSES
Pit your wits against the Dragon or your friends in this three-dimensional game of logic! Also features a zero player option. £7.95

GAMES COMPENDIUM
A selection of games for all the family, including Blackjack, Donkey Derby, Kingdom, Noughts & Crosses, Lunar Lander and Hunt the Wumpus! £7.95

BBC MODEL B:

DRAGON RIDER
Can you destroy the enemies from the sky before your fiery steed runs out of puff £7.95

TANKS!
Variable wind and terrain make this exciting two-player game a challenge for everyone £7.95

All games guaranteed. V.A.T. included in all prices.
Add £0.50p for p&p.

Send cheque of P.O. payable to SALAMANDER SOFTWARE.
27 Ditchling Rise, E. Sussex. BN1 4QL.
Tel: 0273 771942

Discount for bulk orders and retail: send SAE for catalogue.

Programmers wanted – Good Royalties Paid!

***Special Offer**

LEON NOEL

ZX81 16K – GAMES ON TAPE

☐ **BANK ROBBER £4.50**
SEE HOW MUCH MONEY YOU CAN ACCUMULATE BEFORE YOU'RE CAUGHT AND SENT TO JAIL

☐ **PONTOON £4.50**
CAN YOU GET YOUR COMPUTER TO OWE YOU MONEY, NOT EASY, BUT IT CAN BE DONE

☐ **HANGMAN £4.00**
WITH THIS EDUCATIONAL GAME YOUR COMPUTER WILL HAVE 150 WORDS TO CHOOSE FROM

☐ **CASSETTE COVER £4.00**
PUT YOUR ZX PRINTER TO WORK AND MAKE YOUR PROGRAM COLLECTION LOOK IMPRESSIVE
*CHOICE OF SIX COVER PATTERNS

PLEASE TICK APPROPRIATE BOX(S)

MAIL ORDER ONLY
NAME .....
ADDRESS .....
.....
..... CODE .....

I enclose Cheque/P.O. for £.....
Made payable to:

LEON-NOEL
24 Dudgeon Drive, Littlemore Oxford OX4 4QL

ALL PRICES INCLUDE P&P, UK ONLY

V & H COMPUTER SERVICES
PRESENTS

SPECTRUM SPECTACULAR

(50 PROGRAMS FOR THE SINCLAIR SPECTRUM)

And what programs! New games! Old games! Business programs (like invoicing and sales ledger), word processor, machine code routines, graphics . . .
All in **SPECTRUM SPECTACULAR**, the new book by Roger Valentine. **SPECTACULAR VALUE AT £4.95.**

By the same author:
WHAT CAN I DO WITH 1K? (ZX81) — £4.95
WHAT CAN I DO WITH 16K? (ZX81) — £4.95

V & H COMPUTER SERVICES
182c KINGSTON ROAD, STAINES, MIDDX.
TEL: STAINES 58041

Business users please note:
Our PAYROLL program is now available for:
ZX81, SPECTRUM, PET, BBC and KONTRON.
Please write for details or send £2.00 for comprehensive manual.

DRAGON PROGRAMS
THE BEST VALUE ON THE MARKET

COMMENTS ON "FAMILY PROGRAMS"
"Excellent" — MH of Bolton
"Very enjoyable, excellent quality" — CG of Colchester

FAMILY PROGRAMS: 8 full length original games, utilities and education programs to test your general knowledge, memory, reactions, cunning, mental arithmetic, musical knowledge, dexterity and more.....£6.

FUN AND GAMES: 10 games for yound and old, single players and parties. Includes Noughts, Brain, Gold, Snap, Anagrams, Donkey, Dice, Artist, Musical and Circles.....£6

JANUARY SALE — £10 FOR BOTH CASSETTES!

FULL COLOURS, SOUND AND GRAPHICS

Send cheque/P.O. to: **SHARDS SOFTWARE, 10 Park Vale Court, Vine Way, Brentwood, Essex CM14 4UR** (or send SAE for details)

GENEROUS DEALER DISCOUNTS

✱NEW✱ **SPECTRUM ZX81**
SEVERN SOFTWARE

- **GRAIL (16K & 48K SPECTRUM)**
  Exciting new graphic adventure. Where in the 1000 rooms is the Holy Grail! Gather armour and weapons to fight Dragons, Orcs, Wolves. Find Gold and Precious Stones to buy strength potions from a Trader. Stairways to all 10 levels. Where will the Warp take you to? If you lose, you can watch yourself bleed to death! Full M/C sound effects and Save Game facility £4.95 inc.
  Also ZX81—16K version £4.45 inc.
- **MINES OF MORIA (48K SPECTRUM)**
  A challenging adventure set in the Mines of Moria. Collect as much treasure as you can but if you can't remember your route you may never get out! Full graphic display of each location. Save Game and Reset facilities. £5.95 inc.
  Also ZX81—16K version £4.95 inc.
- **SNAPPER (16K—ZX81)**
  Fast M/C action. Avoid the Snappers and stay alive! Features on-screen scoring and automatic restart. £3.75 inc.
- **1K ZX81** owners-send for our list of Fast M/C Games (s.a.e. please).
- **STATISTICS (16K & 48K SPECTRUM)**
  Powerful Statistics Package. Menu-Driven. Features Means, Standard Deviations, True Linear Regression, Pearsons Coefficient of Correlation. Extensive Data Editing routines. Full Graphic display of data and regression lines. Saves named data files. Supports ZX Printer. £6.95 inc.
  Also ZX81—16K version £6.45 inc.
- **THE M/C MANUAL**
  Easy to use (can be used by the absolute beginner). Fully detailed guide to Z80 Op Codes and M/C Programming. Convenient A4 format. Fully documented tables of codes, displacements and number conversions. Easy to follow diagrams and routines throughout.
  designed to use not just to read. £2.95 inc.
- Send S.A.E. for full list and prices for Spectrum and ZX81 software.
- Cheques/P.Os to:
  SEVERN SOFTWARE
  5, SCHOOL CRESCENT, LYDNEY,
  GLOS GL 15 5TA

We Guarantee to replace* **at once *any cassette sold by us that fails to load on receipt.*

H&H
SOFTWARE

Alphabeta

A complete word processing package for the BBC Computer.
New revised version incorporating:
- faster printing
- compatibility with a range of printers including Seikosha, Epson and daisywheels. Versions for other printers on request.
- manual
- labels for the red keys
- automatic wraround
- insert and delete (with gap closure)
- centring
- tabs
- right justification
- automatic word count
- merging
- double width characters
- bulk movement of text

and a host more features.

REVIEWS
Laserbug: "The program did work well and once you are used to it, writing letters etc., becomes very easy. I was inpressed with it in general and would buy it myself."

Acorn User: "Remarkable value — a complete word processing package for less than £30 . . . a useful and relatively inexpensive program."

ALPHABETA £28.50 including postage etc.
Please send orders and cheques/PO/Transcash (No. 614 131 1707) to:

H&H, Dept A, 53 Holloway, Runcorn, Cheshire.
Send S.A.E. for a catalogue of our other educational and games programs for the BBC and Dragon Computers.

CONTROL

THE SINGLE-LINE display on the Microprofessor can make it difficult to keep track of programs more than a couple of dozen bytes long. The simple remedy is to work through the program writing down the machine code by hand for later checking and correction. This process has its drawbacks — inaccuracy and the amount of time involved, for example — but it works. My previous article concerned serial and parallel ports for the transfer of data between the Central Processor Unit — CPU — and peripheral devices. This article concentrates on the Z-80 PI/O — Parallel Input/Output chip — and the connections and software that will allow it to control a printer using a Centronics interface. Although the program is written for the Microprofessor, it can be transported immediately to any other Z-80 based machine. The only change is to modify the addresses of the PI/O registers.

The Z-80 PI/O has four registers controlled by the Port B/A Select — pin 6 — and Control/Data Select — pin 5 — lines. On the Microprofessor these lines are decoded as follows:

Port number	Function
80 hex	Data A
81	Data B
82	Control A
83	Control B

Your computer may not decode these lines sequentially but you should be able to find out which port number corresponds to which function.

The pin connections for the Z-80 PI/O are set out in figure 1. On the Microprofessor computer the PIO data buses and control lines are brought out to a standard 40-way connector on the top left-hand side of the printed-circuit board — PCB. The PCB is numbered on the top side so that you can see easily which pin connects to which line. The lines brought out to the connector are set out in figure 2. Note that in addition to the PIO lines the Counter Timer Circuit — CTC connections are also shown.

I made up a lead to fit the Microprofessor PI/O connector by clamping a socket on to a piece of 40-way ribbon cable about 8in. long. Unfortunately I could buy only a 50-way socket and after fastening the two halves together I cut the socket with a hacksaw to remove the last 10 connectors. The SGS socket held together without the locking clamps at one end and has worked satisfactorily. I left some cable free on one side of the socket and trimmed the excess to about 3 or 4mm. with a pair of scissors. At the other end I split the cable into its individual wires with the scissors so that each wire was about 4in. long. Next I settled down to make the appropriate connections between the Microprocessor PI/O connector and a plug that would fit my Centronics lead.

Making the correct links was hard work. A short Basic program on another machine to work through the connections telling me which pin had to be soldered to which wire would have been a good idea, but in the end I used an ordinary ohmmeter or continuity checker and a list of what had to be done.

After resoldering all the connections four times and using an oscilloscope to check that the strobe signal was actually present, it worked. The list of connections you will need is set out in figure 3. If you are working with a machine other than the Microprofessor take the connections directly from the PI/O column to the Centronics column.

Note that these connections are a minimum Centronics interface and do not take account of other signals from the printer such as the Slct or PE lines. More important, the Acknlg line is not used to acknowledge receipt of each byte of data as the Busy signal becomes high during data entry and printing. The Busy signal is a composite of four conditions in which the printer is unable to receive more data. It works satisfactorily with an Epson MX-80F/T printer.

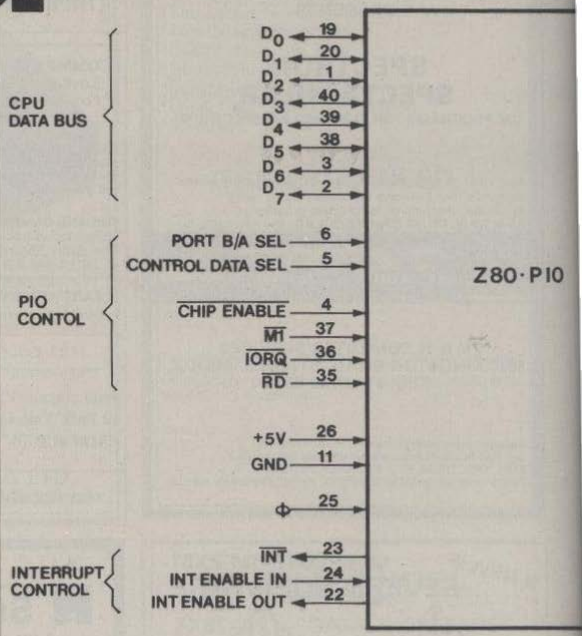

Figure 1.

PRINTING W

Figure 4 is a printout obtained from the Microprofessor using the Centronics interface. There are three subroutines — SR — in the program, each of which may be used by other programs. The SR starting at 1800 sets up the PI/O to output a character to the printer. It is time-consuming to set the control registers for each byte, but any printer is so slow by comparison with the computer that the additional time is negligible.

Subroutine functions

After saving register A, the accumulator, by Pushing it on the stack, the SR sets port A of the PI/O to Output mode and then sets port B to Input mode. The SR then reads an input from port B and loops until bit 7 of port B is zero — that is, it loops until the Busy signal from the printer is low or inactive. When the printer is ready to receive data the SR recovers the contents of the accumulator from the stack

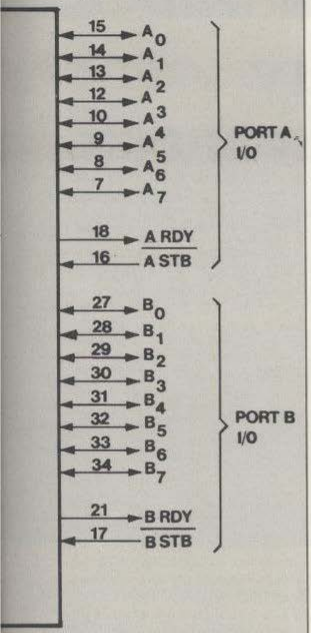

On his odyssey through the control potential of Z-80 based micros, John Dawson reaches the parallel input/output chip — and shows you how to use it to drive a printer.

PI/O pin	Microprofessor pin	code	Function	Centronics pin
18	16	A RDY	STROBE	1
15	15	PA0	DATA 1	2
14	14	PA1	DATA 2	3
13	13	PA2	DATA 3	4
12	12	PA3	DATA 4	5
10	10	PA4	DATA 5	6
9	9	PA5	DATA 6	7
8	8	PA6	DATA 7	8
7	7	PA7	DATA 8	9
11	11	GROUND	0 Volts	16
34	28	PB7	BUSY	11

Figure 3.

```
1800  F5 3E 0F D3 82 3E 4F D3 83 DB 81 17 38 FB F1 D3
1810  80 C9 00 00 00 00 00 00 00 00 00 00 00 00 00 00
1820  F5 1F 1F 1F 1F CD 30 18 F1 CD 30 18 C9 00 00 00
1830  E6 0F C6 30 FE 3A 38 02 C6 07 CD 00 18 C9 00 00
1840  3E 0D CD 00 18 3E 0A CD 00 18 16 00 06 10 7C CD
1850  20 18 7D CD 20 18 3E 20 CD 00 18 CD 00 18 7E CD
1860  20 18 3E 20 CD 00 18 23 10 F4 1D 20 D3 3E 0D CD
1870  00 18 76 FF 00 FF 60 77 08 77 00 FF 00 FF 21 FF

0000  06 00 10 FE 3E 90 D3 03 3E C0 D3 02 31 AF 1F 3A
0010  E5 1F FE A5 C4 C1 03 21 00 10 CD F6 05 28 02 26
0020  18 22 DC 1F 26 00 18 0A E3 2B E3 22 E8 1F 18 0E
0030  18 34 22 D2 1F 18 1D 71 E5 2A EE 1F E3 C9 32 E7
0040  1F 2A E0 1F 3A E2 1F 77 3E 80 D3 02 3A E7 1F 2A
0050  E8 1F 00 C9 21 9F 1F 22 D0 1F AF 32 E6 1F DD 21
0060  9F 07 C3 D0 00 FF 32 E7 1F 3E 90 D3 03 3E C0 D3
0070  02 3A E7 1F 22 E8 1F E1 22 DE 1F 22 DC 1F 2A E8
0080  1F ED 73 D0 1F 31 D0 1F FD E5 DD E5 D9 E5 D5 C5
0090  D9 08 F5 08 E5 D5 C5 F5 ED 57 32 D3 1F 3E 00 E2
00A0  A4 00 3E 01 32 D2 1F 31 AF 1F 2A D0 1F DD 21 B5
00B0  07 2B CD F6 05 20 19 2B CD F6 05 20 13 DD 21 AF
00C0  07 00 00 11 62 E0 19 38 07 DD 21 B6 1F 37 18 04
00D0  AF 32 E4 1F 3A E2 1F 2A E0 1F 77 DC 0B 04 31 AF
00E0  1F CD FE 05 CD CB 06 18 F5 FE 10 38 24 21 E6 1F
00F0  CB C6 D6 10 FE 08 21 37 07 DA B0 03 DD 21 B6 1F
```

Figure 4.

ITH THE Z-80 PI/O

and sends it to the printer by outputting the data to port A. The SR then returns to the calling program.

The second SR starts at 1820 and, with the SR at 1830, splits a byte of data into two hexadecimal digits and prints the resulting values. The top four bits of the byte are rotated to the lower half and printed by the SR at 1830 after being converted to an ASCII number. The lower four bits are then processed in the same way.

The final program starting at 1840 will print a section of memory in the format shown in figure 4. The program starts by printing a carriage return character — 0D hex — and then a line-feed character — 0A hex — to position the print head correctly. If your printer automatically prints a line feed after each carriage return you may wish to replace the instructions — 3E 0A CD 00 1B — with no operation — NOP instructions — 00 hex.

The start address is passed to the program in register pair HL and the number of lines to be printed in register E. On the Microprofessor you can set these registers directly before executing the program at 1840. On other machines you may jump to the program with the correct values set in HL and E and may also change the Halt instruction — 76 — at the end of the program to C9 — return from subroutine.

Length of line

The length of the line to be printed is set by loading register B with 10 hex at address 184B and 184C. If your printer cannot print lines 54 characters long, it is best to alter 184C to a suitable value.

Changing the location of the programs is easy; simply a matter of altering the addresses to which the absolute Call — CD — instructions refer. ■

Figure 2. P2 PIN FUNCTION

PIN NO	SIGNAL	PIN NO	SIGNAL
1	NC	21	PB0
2	NC	22	PB1
3	NC	23	PB2
4	NC	24	PB3
5	NC	25	PB4
6	NC	26	PB5
7	PA7	27	PB6
8	PA6	28	PB7
9	PA5	29	NC
10	PA4	30	GND
11	GND	31	CK/TR0
12	PA3	32	CK/TR1
13	PA2	33	CK/TR2
14	PA1	34	CK/TR3
15	PA0	35	ZC/TO0
16	$\overline{\text{ASTB}}$	36	ZC/TO1
17	$\overline{\text{BSTB}}$	37	ZC/TO2
18	ARDY	38	PIO IEO
19	BRDY	39	CTC IEI
20	NC	40	NC

WHY WAIT

When you could buy better now – the advanced Colour Genie can be yours for just £224.50 (inc. VAT)

Colour Genie is the powerful new piece of home computing magic from Lowe Electronics, and it's available NOW from your local stockist, or by mail order in less than 3 weeks!

In no time at all you could be connecting the Genie to a standard colour TV. Its 16K RAM, 16K BASIC ROM and full size typewriter keyboard instantly connecting you to a whole new dimension of vivid colour, high resolution graphics and fabulous 3 channel music synthesiser.

The whole family will be enthralled by its possibilities. Add the EG2016 MATCHING CASSETTE RECORDER for instance, and right away you can either load pre-recorded software onto your Genie, or store your own programs. Then, if you fancy a spot of intergalactic travel, or a battle for the planets Genie will lay on the transport. When you get tired of the kids beating you at Space Invaders you can always turn their attention to schoolwork. Colour Genie uses the popular Z80 Central Processing Unit, and is fully programmable in level II BASIC, the most popular home computer language in the Western world.

For the committed games player the next 'must' will probably be the EG2013 JOYSTICKS. They're sturdy, accurate and, with digital and manual operation, are a step up again from arcade controls.

However the more serious user might prefer to invest his money first on the addition of an EG2011 16K RAM CARD which slots in and effectively doubles the Random Access Memory.

Or perhaps the EG2014 LIGHT PEN, which plugs straight into the side of the Genie. Both are extremely effective ways to enhance the colour graphics facility.

Finally, if you really intend to put your machine to work, at home or in your business, you'll need a printer like the EG603 MICROPRINTER. It's a quality dot matrix printer with an impressive specification... simple to operate, reliable and extremely versatile. Should you require it, the printer will accept paper whether in roll or single sheet form with one or even two copies attached. Full 80 column width in any of the 3 different typesizes available.

To connect this, or any other compatible printer, you also need the EG2012 PRINTER INTERFACE CABLE.

So there you have it – a home microcomputer system that expands from a computer for the creative mind right up to a realistic business machine. We not only deliver the best specification, but we deliver the Colour Genie fast, so why wait?

MONTHS?*

Key Features of the Colour Genie

Full colour – eight vivid colours

Massive RAM – 16K or 32K

Professional typewriter keyboard

High resolution – 160 × 96 pixels.

Big display – 40 characters × 24 lines

ASCII character set – with upper and lower case characters

Graphics – 128 pre-defined graphics characters plus 128 user-definable graphics set – a total of 256 graphics set.

High speed CLOAD and CSAVE – cassette interface runs at 1200 baud. Save 15K in 100 secs via our optional low-cost EG2016 cassette recorder.

We have over 100 dealers throughout the U.K. (including Northern Ireland). For advice on your nearest stockist ring us on 0629 4995. In cases of local difficulty, we will supply direct AND FAST. Just fill in the coupon below.

*LOWE ELECTRONICS HAVE NEVER YET FAILED TO DELIVER WITHIN 3 WEEKS! Some Microcomputer Companies, mentioning no names, are reputed to take more than three months to deliver your computer. Buy direct from us, and we guarantee not to cash your cheque until 7 days prior to the despatch of your order (this is to satisfy cheque clearance requirements). If, in the *extremely* unlikely event we, for the first time in our company's history, cannot deliver within 3 weeks, we'll contact you immediately and offer to return your original cheque *uncashed.*

COLOUR GENIE

– ALWAYS AT YOUR COMMAND

U.K. Distributors

LOWE electronics

Chesterfield Road, Matlock,
Derbyshire DE4 5LE.
Telephone: 0629 4995
Telex 377482 Lowlec G.

Please send me following items:	Tick
EG.2000 Colour Genie @ £224.50	☐
EG. 2011 16K RAM Card @ £38.50	☐
EG. 2012 Printer Interface Cable @ £39.50	☐
EG. 2013 Joysticks @ £49.50	☐
EG. 2014 Light Pen @ £17.25	☐
EG. 2016 Cassette Recorder @ £28.75	☐
EG. 603 Printer @ £287.50	☐
Securicor Delivery £5 (Any no. of items)	☑
All prices include VAT. Total	____

I enclose cheque/P.O. ☐
or please debit my Credit Card No:
_____
Name _____
Address _____
_____
_____ Postcode _____
Tel: _____

YC.2.83

Push your Sinclair to the limit

ZX81/SPECTRUM ARCADE GAMES

NEW **ZX INVASION FORCE** (ZX81)
Use your skill to fire through the energy band to destroy the menacing alien ship — **£3.95**

NEW **SPEC INVADERS**
SPEC GOBBLEMAN
These exciting high-speed classic games incorporate hi-resolutiongraphics and sound to bring you the best in arcade action at only **£4.95** each (16/48K)

NEW **SPEC FROG 5/SHOWDOWN** (16/48K)
Hop across the dangerous road avoiding the lethal cars, then lorries. Go back to the wild west for a gunfight battle amongst cacti and wagons. Features include western music. **£4.95**

NEW **NAMTIR RAIDERS** (ZX81)
High speed, quick action arcade game with four separate groups of attackers. **£3.95**

Gobbleman also available for ZX81 at **£3.95**

UTILITIES

NEW **TOOLKIT**
Nine powerful new functions for your ZX81 (including re-number lines (goto, gosub), program merge, string finding and replacement. **£5.95**

SPEC BUG
A 30 in 1 machine code tool and disassembler for your ZX Spectrum. **£6.95**

ZX BUG
A 30 in 1 machine code tool and disassembler for your ZX81. **£6.95**

Improve your machine code programs with this new 48K Spectrum Assembler

Just released by Artic, this new professional quality assembler is also available for 16K ZX81 and features:—

• Word-processor-like text editor. • High-speed, versatile two-pass mnemonic assembler with labels and detailed error-trapping. Will assemble to any address. • Essential support facilities such as memory-edit, register inspect/modify and search for de-bugging. • Full output to ZX-printer. • Memory-status report and comprehensive user-manual.

ONLY £9.95

ZX81 & SPECTRUM

ADVENTURE GAMES

JUST RELEASED for 48K SPECTRUM
Still available for ZX81

INCA CURSE (Adventure B)
In a jungle clearing you come across an ancient Inca temple. Your mission to enter, collect the treasure and escape alive. But beware!
Includes a cassette save routine. **£6.00**

SHIP OF DOOM (Adventure C)
You are unavoidably drawn to an alien cruiser. Can you reach the control room and free yourself? Or will they get you first? Includes a cassette save routine. **£7.00**

ESPIONAGE ISLAND (Adventure D)
While on a reconnaisance mission your plane loses control and you are forced to land. Can you survive and escape with the island's hidden secret? **£8.00**

PLANET OF DEATH (Adventure A) 16/48K
You find yourself stranded on an inhabited alien planet. Can you reach your ship and escape? **£5.00**

REDUCED TO £29.95

ZX FORTH

Supplied on cassette with editor cassette, user manuals and keyboard overlay. ZX Forth combines the simplicity of basic with the speed of machine code.

THE ULTIMATE ADVENTURE FOR THE SPECTRUM/ZX81 for only £9.95

AND THE CHANCE TO WIN £10,000 or more IF YOU

KRAKIT™

KRAKIT TRADE MARK OF INT. PUBLISHING & SOFTWARE INC.

Your eccentric father has left you £10,000 in his will. In order to claim your windfall you must solve twelve clues and gain access to a bank account in which the money has actually been deposited. Be the first to crack the puzzle and the prize is yours! Plus you will win two tickets to the city of the secret KRAKIT™ vault location. The prize money is increased weekly. A telephone number will be supplied so you have the opportunity to find out just how much you could win.

RULES AVAILABLE FROM ARTIC

DON'T MISS YOUR CHANCE TO WIN A FORTUNE!

A GREAT CHESS GAME FOR YOUR ZX81 OR SPECTRUM

*SPECTRUM CHESS 48K

ZX CHESS I
Very popular machine code program, with six levels of play and an analysis option. Available for ZX81. **£6.50**

ZX CHESS II
A new improved version, with a faster response time, seven levels of play, analysis option and in addition a recommended move option. **£9.95**

ZX 1K CHESS
An incredible game in 1K for only **£2.95**

As featured on ITV

NEW **SPECTRUM VOICE CHESS**
This incredible program talks you through your game.
It tells you its move, recommends a move, and contains a range of facetious comments. The game is based on the highly successful ZX Chess II and is offered at the Christmas offer price of **£9.95**.

SPECTRUM CHESS now only **£9.45**

ALWAYS AHEAD WITH ZX81/SPECTRUM SOFTWARE

Cheques & P.O. made payable to: Artic Computing Limited. Dealer enquiries welcome.
Please state whether your order is for ZX81 or Spectrum. Send S.A.E. (6in × 9in) for catalogue.

VISA

ARTIC

ARTIC COMPUTING LTD.
396 JAMES RECKITT AVENUE,
HULL, N. HUMBERSIDE,

To: Artic Computing Ltd., 396 James Reckitt Avenue, Hull, N. Humberside, HU8 0JA.

Please supply .....

Cheque for total amount enclosed .....

Name .....

Address .....

YC2

RESPONSE FRAME

Do you have a problem? Your manual is incomprehensible or you just cannot get the hang of that programming trick you tried — whatever it is, Tim Hartnell will do his best to answer your queries. Please include only one question per letter and mark them "Response Frame".

INTELLIVISION

■ Our family has an Intellivision TV game. The makers of the game, Mattel, are bringing out a keyboard which — when plugged into the game — converts it into a microcomputer. Do you think it is worth buying this keyboard?

P Monks,
Gravesend, Kent.

THE KEYBOARD unit has only been introduced in test markets in America, for around $700, and the indications are that it will not be released in the States. This being so, it is unlikely to come out in this country, but the company may well have other plans. Whenever you think about upgrading a TV game into a computer, you have to ask what sort of computer you will end up with. The chances are that you will get a fairly slow, limited computer, locked to the technology of the time when the computer game itself was built. Although I would not say "No, it is not worth it" you need to ask three things: how much is the extra unit? Can I buy a complete computer which is as good, or better, for the price of the keyboard unit? Even if the keyboard is cheaper than buying a computer, how good a computer will I end up with?

POKE SURPRISE

■ While experimenting with Poking on my ZX-81 I came across a real surprise. In response to random Poke, the computer came back with the report code 10. As the manual doesn't have this report code in it, could you tell me what it means?

Tim Steyning,
Shoreham, Sussex.

YOU HAVE probably accidentally used the ZX-81's error-trapping facility — RST — which allows the computer to generate restart codes, and return to command mode.

MOUSE RULES

■ I wish to build a robot mouse to enter competitions where the mouse has to solve a maze. What are the rules of such competitions?

Martin Hamish,
Glasgow.

THERE ARE a number of rules for the Euromouse Maze Contest, and these are subject to change, depending on the conditions set by the competition organisers. In general though, the rules include reference to the size of the maze — 16 by 16 squares, based on a 7in. matrix, the walls 6.5in. apart, 4in. high, painted white with red tops — and the target post — 1in. square, 8in. high. These measurements are allowed to be within five percent of the stated measurements. Each mouse is allowed a maximum of 15 minutes to perform, and if the mouse succeeds in finding its way from the start to the maze centre, the time is noted, so the handlers can — if they so wish — set the mouse to make a second, and subsequent run. The shortest time is counted as the mouse's time. The mouse itself may be no larger than 25cm. square. The mouse is allowed to bulge above the top of the maze. The Micromouse Maze contest was first held in the US by IEEE Spectrum.

CRASH PROBLEM

■ Using a 64K RAMpack connected to my ZX-81, I am surprised that the system crashes as soon as Vars becomes greater than 32768. There is no problem in storing variables above this point, but it seems that the system is not able to hold program lines on the screen above 32K. Is it a bug in the system, or is there a trick to circumvent it?

E Neve,
Brussels, Belgium.

I AM INFORMED that the computer will work perfectly so long as the display file does not over-run 32768. One way of making sure this does not happen, is to declare a giant array, such as DIM A$(16000), then delete it once the program length is greater than 16K.

AT RANDOM

■ Spurred on by Kathleen Peel's superb introduction to machine code for the ZX-81, I am attempting to learn how to use machine language. I am trying to write a game, but am having difficulties as I cannot find out how to select a random number in machine code. Could you help?

N Luff,
Cove, Farnborough.

ONE WAY of doing this is to initialise a pointer to zero early on in your program, and then, while waiting for a key press or similar event, increment the pointer as you go through a waiting loop. You must ensure that if the pointer reaches 8192 — the extent of the ZX-81 ROM — it is reset to zero. Then, every time you need a random number, simply fetch the location in ROM pointed to, then increment the pointer again. Two books which may help you in your study of ZX-81 machine code are *Machine Language Made Simple* from Melbourne House, and *Mastering Machine Code on your ZX-81* from Interface.

PRIVACY

■ I am a member of my school computer club, and we have a Vic-20 computer. I have a few games and serious programs on my tapes. I was wondering if you could tell me how to add a security code into my tapes so that only I can run the program, as some of the programs are quite private.

J A Isles,
Preston, Lancs.

THE SIMPLEST WAY to do this is to select an address in RAM which is not being used, then embed in your program the line USR (X), where X is the selected address. Before you run the program, you must Poke — in the direct mode — the address with 96. If you do not do this, the program will crash dramatically. In effect, you will have a program which no-one else can run.

SCROLL DOWN

■ Do you know of a routine which will scroll the ZX Spectrum screen display downwards? Also, do you know of a routine which will define whether or not a character position is occupied by a character?

Martin Banks,
Bolton, Lancashire.

SCROLLING DOWNWARDS can be achieved by this routine. Enter anything you like for a $ — in line 20 — to see it in action:

```
 5 REM Downward scroll
10 DIM a$ (704.)
20 INPUT a$
30 PRINT AT 0,0;a$
40 LET a$ = "" + a$(TO 672)
50 GO TO 30
```

The Screen$ routine does not pick up on user-defined characters. I suggest you use Attr instead, making sure that the character you wish to check on has been printed with local, rather than universal, Ink colour.

VERIFICATION

■ Does the BBC Micro support a Verify command or equivalent? Is it necessary? Can programs be made self-starting when loaded from tape such that all variables are also loaded? The Chain command clears only the dynamic variables but leaves the static variables — @% through to Z% — unchanged. Why?

S Hartley,
Wakefield,
West Yorkshire.

THE BBC MICRO does not have a Verify command which allows you to compare a program on tape with that which is in the computer. However, there are two ways you can check a program. One is by using *Cat which will indicate a tape error. The other way is to Save a program, New the computer, then load it. If it does not load, an Old will restore the original program to try it again. There is no simple way to make a program self-starting with variables intact. The variables @% through to Z% are stored in a separate area of memory — &400 to &460 — which is never cleared by the computer. Different operating systems load this area of memory with different values when the computer is turned on. If the computer is not switched off between programs, you can use this area to access variables from one program when using a subsequent program.

THE CHOICE

■ I have decided on buying a home micro. I have studied various kinds and narrowed the choice down to the Commodore 64 or BBC Model B. Can you help?

Nadim Ahmed,
Walthamstow,
London.

BOTH MACHINES have their strong points. While the BBC gives a higher graphics resolution there are not as many colours and no sprite facility; BBC Basic is undoubtedly the more powerful version but is harder to master. Only 8K RAM is available on the BBC in high-res mode as opposed to 24K on the 64. It could also be said that the promised introduction of Simons Basic on the Commodore machine may put it very slightly ahead of the BBC, but obviously, the additional cost must be considered. This list could well be extended but the question is really a matter of horses for courses.

WAIT FOR IT

■ Please could you tell me if the forthcoming Microdrive for the Spectrum will be able to operate on the ZX-81? If not, could you suggest some means of adapting it or interfacing it with my computer?

G Rathbone,
Lincoln.

ALTHOUGH THE Microdrive is not designed to work on any computer other than the Spectrum, it is most probable that within weeks of the Microdrive's release, adaptors will be on sale to run Microdrives from a variety of computers, including the ZX-81. Just keep watching the *Your Computer* advertisements. ■

ZX SPECTRUM KEYBOARDS PROGRAM AIDS SOUND GENERATORS BUSINESS PROGRAMS MEMORY EXTENSIONS

ZX81/80 SOFTWARE HARDWARE

ZX SPECTRUM KEYBOARDS PROGRAM AIDS SOUND GENERATORS BUSINESS PROGRAMS MEMORY EXTENSIONS

PRINTERS USER GROUPS BOOKS CONSOLES GAMES JOYSTICKS

ZX81/80 SOFTWARE HARDWARE MONITORS MAGAZINES COMPUTERS

ZX SPECTRUM KEYBOARDS PROGRAM AIDS SOUND GENERATORS BUSINESS PROGRAMS MEMORY EXTENSIONS

See us at the ZX Microfair!

If you own a ZX81 or SPECTRUM — or if you're thinking of buying for the first time — **the ZX MICROFAIR is not to be missed!**

There's literally everything for the beginner, amateur, enthusiast and professional.

A fantastic range of products from both the established manufacturers and the newer ones!

There's a bring and buy sale and a complete show guide available on the day.

It's a good day out and the opportunity of learning everything there is to know about ZX Computers.

The facilities at the hall include Bar, Restaurant and lots of seating!

Make a note of it now, or write to Mike Johnston, 71 Park Lane, London N17 OHG for advance tickets (Cheques etc made payable to ZX MICROFAIR and please enclose S.A.E.)

At 80p for adults and 50p for kids (under 14) it must be a bargain!

6th. ZX MICROFAIR

SAT FEBRUARY 26th • NEW HORTICULTURAL HALL LONDON SW1 • 10am-6pm

DON'T MISS THIS INCREDIBLE OFFER!

50 GAMES £9·95!

ZX spectrum Cazxette-Fifty

GALACTIC ATTACK
SPACE MISSION
LUNAR LANDER
PLASMA BOLT
STARTREK
RADAR LANDING
ATTACKER
GALACTIC DOGFIGHT
ZION ATTACK
IVASIVE ACTION
OXO
BOGGLES
PONTOON
SKI JUMP
HANGMAN
OLD BONES
THIN ICE

MAZE EATER
ORBITTER
MOTORWAY
FORCE-FIELD
NIM
TUNNEL ESCAPE
BARREL JUMP
CANNONBALL BATTLE
OVERTAKE
SITTING TARGET
SMASH THE WINDOWS
SPACE SHIP
JET FLIGHT
PHASER
INTRUDER
INFERNO
GHOSTS

SUBMARINES
ROCKET LAUNCH
PLANETS
BLACK HOLE
DYNAMITE
DO YOUR SUMS
DERBY DASH
SPACE SEARCH
UNIVERSE
RATS
TANKER
PARACHUTE
JETMOBILE
HIGH RISE
THE FORCE
EXCHANGE

CASCADE SOFTWARE

ALSO AVAILABLE FOR **VIC 20**

50 PROGRAMS- GAMES EDUCATIONAL BUSINESS HOME

STOP PRESS!

only £9·95 inc. V.A.T. & Post & Packaging

coming soon games for

BBC ATARI ATOM DRAGON 32

ORDER FORM

POSTAGE FREE TO U.K. ORDER DIRECT TO:

CASCADES HOUSE
BARGAN'S LANE
LLANDOGO
GWENT
S.WALES
NP54PA

SU 1/1

VIC 20 ☐ SPECTRUM ☐

PLEASE SEND ME .....
CHEQUE ENCLOSED, VALUE .....
NAME .....
ADDRESS .....
POSTCODE .....

FINGERTIPS

Fingertips is our regular calculator column covering calculator news, programming hints and examples of unusual applications. The column is written and compiled by calculator enthusiast David Pringle who is glad to hear of any of your ideas. *Your Computer* pays £6 for each of your contributions published.

WE HAVE in recent issues looked at some interesting programs which make successive approximations of an irrational number, such as π, as the ratio of two rationals. The most efficient program that I have received so far can generate the approximation 355/133 for π in just two seconds — as opposed to the original eleven minutes! *Your Computer* is now going to offer a year's subscription to the author of the most accurate and efficient program for generating e — the base of natural logarithms.

D T Whiteside has sent a most interesting program which also deals with a π approximation. He quite rightly points out that with a programmable calculator we can deal exactly with irrational numbers such as certain square roots and constants. The motivation for this comes from a theorem first proved fully by the 18th century French mathematician Lagrange. This says that all positive rational numbers have square roots which can be expressed in terms of unit continued — fractions with a finite set of denominations,

$$q_i\,;\ i=1,2\ldots\ldots n$$

which repeat. The full interest in this result may be seen if I define a unit—continued fraction as

$$q_0 + \cfrac{1}{q_1 + \cfrac{1}{q_2 + \cfrac{1}{\ddots\ q_i + \cfrac{1}{q_i}}}}$$

and so on.

Or, for short, any square root of a rational number may be written in the form: $\sqrt{\frac{a}{b}} = q_0; q_1, q_2, \ldots q_n, q_1, q_2 \ldots$

As you can see we can now determine any surd $\sqrt{\frac{a}{b}}$ by a defined mathematical series — something which the pocket calculator can calculate early. But, as Mr Whiteside also points out, these unit continued-fractions are only one of a general class of such fractions —

$$a_0 = \cfrac{a_1}{b_1 + \cfrac{a_2}{b_2 + \cfrac{a_3}{b_3 + \ldots}}}$$

It is with these generalised continued fractions that we can express constants such as π and e. For each constant there are an infinite number of different ways (of course) of expressing as a continued fraction.

It is the recursive ones which have interested mathematicians for

(continued on next page)

Program 1. Mr Whiteside's program for the TI-59

000	76	LBL	060	07	07
001	11	A	061	43	RCL
002	47	CMS	062	03	03
003	04	4	063	85	+
004	42	STD	064	43	RCL
005	01	01	065	04	04
006	01	1	066	65	×
007	42	STD	067	43	RCL
008	04	04	068	09	09
009	76	LBL	069	95	=
010	12	B	070	42	STD
011	01	1	071	08	08
012	44	SUM	072	43	RCL
013	00	00	073	07	07
014	43	RCL	074	42	STD
015	00	00	075	03	03
016	65	×	076	43	RCL
017	02	2	077	08	08
018	75	−	078	42	STD
019	01	1	079	04	04
020	95	=	080	43	RCL
021	42	STD	081	03	03
022	09	09	082	67	EQ
023	43	RCL	083	12	B
024	00	00	084	43	RCL
025	33	X^2	085	04	04
026	42	STD	086	67	EQ
027	10	10	087	12	B
028	65	×	088	53	(
029	43	RCL	089	43	RCL
030	02	02	090	01	01
031	95	=	091	75	−
032	42	STD	092	01	1
033	05	05	093	54	)
034	43	RCL	094	55	÷
035	01	01	095	43	RCL
036	85	+	096	03	03
037	43	RCL	097	95	=
038	02	02	098	59	INT
039	65	×	099	42	STD
040	43	RCL	100	05	05
041	09	09	101	43	RCL
042	95	=	102	02	02
043	42	STD	103	55	÷
044	06	06	104	43	RCL
045	43	RCL	105	04	04
046	05	05	106	95	=
047	42	STD	107	59	INT
048	01	01	108	75	−
049	43	RCL	109	43	RCL
050	06	06	110	05	05
051	42	STD	111	95	=
052	02	02	112	22	INV
053	43	RCL	113	67	EQ
054	04	04	114	12	B
055	65	×	115	43	RCL
056	43	RCL	116	01	01
057	10	10	117	75	−
058	95	=	118	43	RCL
059	42	STD	119	03	03

(listing continued on next page)

Program 3. Mr Jagota's FX-602p program.

```
PROGRAM                                                          STEP
    P0   Mac 100: Min10 GSB P6                                    007
    P1   AC Min00 22 MinF AC 2 Min11 AC MR06 ×MF GOTO0 GOTO2      013
         LBL0  "Pr 06" Pause "BUST" Pause GOTO 5                  026
         LBL2 21 MinF AC MR06 ×MF GOTO1 GOTO3                     035
         LBL1 "PONTOON" Pause AC 3 Min 11                         049
         LBL3 GSB P5 M+08 "Pr06" "My turn:Pr08" Pause AC Mr06     070
              MinF AC MR08 ×MF GOTO6 GOTO5                        076
         LBL4 22 MinF AC MR08 ×MF GOTO6 GOTO5                     085
         LBL5 "I win" Pause GOTO7                                 095
         LBL6 "You Win" Pause AC MR05:MR11+M+10                   112
         LBL7 Mr10 ÷>0 GSB P8 AC MR10-50÷>0 GOTO6 GSB P8          125
         LBL8 1 EXP4=MinF                                         131
         LBL9 AC MR10 ×MF GSB P9 GSB P6                           137
    P5   AC ARR#:10 + 1.5 = INT                                   011
    P6   AC Min 05                                                002
         LBL0 MR10-1="Total:#"HLT INT Min05 AC 50 MinF MR05       024
         ×MF GOTO1 GOTO0                                          027
         LBL1 AC MR10 MinF AC MR05 ×MF GOTO 0 GOTO 2              036
         LBL2 "Stake:Mr05" Pause MR05 M-10 AC                     050
         LBL3 GSBP5 Min06:#:"HLT GSBP5 M+06":#:"HLT GSBP5 M+06    068
         ":#:"HLT GSBP5 M+06 ":#:"HLT GSBP5 M+06 ":#" Pause       081
         GSB P1                                                   090
    P7   "Play again?" Pause "Press P0" HLT GSB P7                026
    P8   "You lost" Pause GSB P7                                  012
    P9   "You won" Pause GSB P7                                   011

         Total Steps Used : 301     Total Steps Left : 211
```

Memory	Contents
F	Variant
05	Your stake
06	Your total cards
08	Calculators card
10	Your total
11	Stake multiplier

Program	Function
P0	Game restart
P1	Stick

(listing continued from previous page)

```
120   42 STD
121   01  01
122   65  ×
123   43  RCL
124   05  05
125   99 PRT
126   95  =
127   42 STD
128   03  03
129   43 RCL
130   02  02
131   75  -
132   43 RCL
133   04  04
134   42 STD
135   02  02
136   65  ×
137   43 RCL
138   05  05
139   95  =
140   42 STD
141   04  04
142   61 GTO
143   12  B
```

(continued from previous page)

centuries — the first noted recursive expression was produced in 1380!

$$\pi = 4\,(1 - 1/3 + 1/5 \ldots + \frac{1}{2n-1} \pm f2n)$$

where

$$fn = \tfrac{1}{2} \times \cfrac{1}{n + \cfrac{1^2}{n + \cfrac{2^2}{n + \cfrac{3^2}{n + \ldots}}}}$$

A less unwieldy version from 1654 goes:

$$\pi = \cfrac{4}{1 + \cfrac{1^2}{2 + \cfrac{3^2}{2 + \cfrac{5^2}{\ldots\ldots}}}}$$

Very recently, an IBM researcher has shown how a general continued-fraction may be reduced to the equivalent unit continued-fraction. This is exciting because the unit fraction is unique for a given set of general fraction. Mr Whiteside's program — written for the TI-59 — is able to convert the 1654 algorithm above to the unique unit continued fraction for pi. After keying in the program, press A to run and the output will be in the form.

3
7
15
1
292

Meaning

$$\pi = 3 + \cfrac{1}{7 + \cfrac{1}{15 + \cfrac{1}{1 + \cfrac{1}{292 \cdots}}}}$$

Hence our calculator will derive π to an arbitrary number of decimal places — well beyond the inherent accuracy of the machine!

Professor Ashworth of London is concerned that we do not give away 'secret' information. He has an interesting idea which is applicable if a calculator is being used for income-tax calculations, home accounts, or any other confidential purpose the stores contain figures one would not wish to be known. It is easy to obtain superficial confidentiality of data held in a home computer by use of a password, although anyone with access to the program tape or disc can find the password because it has to be there to be checked.

There is no such way of protecting data held in the stores of a programmable calculator, although the program itself can be protected from being copied. Anyone with access to a magnetic card on which the data is recorded can read it, and in the case of a constant-memory calculator the stores are openly available.

A simple device will, however, make the records meaningless to other people. At the end of a series of calculations a secret number — such as a previously used telephone number, bank account number, or similarly easily-remembered set of digits — is keyed into the display, made negative, and by means of a short sub-routine, accessed by a user-defined label, this is summed into all the stores. If the number is numerically larger than their contents it drives all of them into a negative condition which gives no idea of their true content. When the calculator is next used the same set of digits, left positive this time, is keyed in and added by the same sub-routine to all the memories to restore them to their correct values.

It will be obvious that a similar ploy could be used equally well, and with more safety than a password offers, to disguise the values stored in the program of a small domestic computer.

The next program from D Darman, of Allington, enables frustrated Casio algebraic notation machine users to convert to reverse Polish notation.

To use the program the keys are given the following meanings:

P4 — Enter
P3 — Plus
P8 — Minus
P2 — Multiply
P7 — Divide
P1 — Pick
P6 — Roll
P0 — Mod
P9 — display top of and, stack.

The keys P3 — plus, P8 — minus, P2 — multiply, and P7 — divide — are the same as the keys +, –, × ÷, except that they operate on the top two numbers on the stack, for example, to calculate 2+3 you would enter 2, then enter P4 3, then enter P4 + P3 and 5 would be displayed and also put onto the stack.

The mod function P0 converts the number second down on the stack to the modulus of the number on the top of the stack; for example: 9 enter P4, 7 enter P4 mod P0 results in 2 being displayed since 9 mode 7 = 2.

The function Pick — P1 — uses the number on the top of the stack to pick a number down the stack and put it on the top of the stack. For example: 11. Enter P0 22, enter P0 33, enter P0 2, enter P0. Pick P1 results in 11 being put on top of the stack since 11 is the third number down; note that the original 11 is still in the stack beneath 22.

Roll P6 is like pick P1 except that when the number is copied to the top of the stack, the rest of the stack is moved down to fill up the gap, for example, 11; enter 22; enter 33; enter 44; enter 3, enter Roll — P6 — result in the stack changing thus:

from	to
3	22
44	44
33	33
22	11
11	

Rotating the top three numbers on the stack.

Finally, a game for the FX-602p written by Anil Jagota of Newcastle.

This program was originally written for the Casio FX-602p programmable calculator.

To play you press P0 and your total spending money to be displayed. You are allowed to bid anything from 50p up to your total. Press EXE to enter your bid. You are then dealt a card displayed as n:.

If you wish to twist press EXE the display then shows n:n:. You are allowed to twist four times giving you a total of five cards. If you wish to stick at any one time you would press P1. The calculator will then check if you have a possible pontoon or if you are bust.

If you have not, the calculator will go ahead and have its own hand of cards. If it beats you or equals you without going bust, the calculator wins and tells you so. It also tells you if you have won. If you lose you lose the amount of money bet.

After the hand of cards the calculator checks if you have less than 50 or more the 10,000 left. If you have less than 50 the game is over for you and the calculator tells you so. If you have more than 10,000 left you have won and the calculator will tell you so.

If your total is between 50 and 10,000 you are dealt another hand of cards and the game continues with a new bet.

To reduce or enlarge the lowest bet allowed go to the WRT mode and STEP 23 on P6 and change the 50 of 50 MINF to whatever you wish. To reduce or enlarge the end of game total go to the WRT mode and STEP 131 and change the 1 EXP 3 which is 10,000 to whatever you wish; EXP need not be used.

Program 2. Mr Darman's program.

```
P0 11 Steps +1
GSB P9, MinF, 1/x, X, GSB P9, =
Frac,
X, MRF, =, GSB P4

P1 9 Steps +1
GSB P9, +/-, +, MR1F, =, Min F,
Ind, MRF, GSB P4

P2 5 Steps +1
GSB P9, X, GSB P9, =, GSB P4

P3 5 Steps+1
GSB P9, +, GSB P9, =, GSB P4

P4 6 Steps+1
IND, Min 1F,x ↔ y,1, M+1F,x ↔ y

P6 25 Steps+1
GSB P9, GSB P4, GSB P1, 1, M - 1F,
LBL0, 1, M + F, IND, MRF, x ↔ y,
1, M - F, x ↔ y, IND, MINF, 1,
M+F, MR1F, x=F, GOTO9, GOTO0,
LBL9, GSL P9, GSB P4

P7 6 Steps+1
GSB P9, ÷, GSBP9, x ↔ y, =,
GSB P4

P8 4 Steps+1
GSB P9,+/-, GSB P4, GSB P3

P9 7 Steps+1
MR1F, x=0, 1/x,1, M - 1F, IND, MR

Total 78 + 9 = 87 steps
```

20 BEST PROGRAMS for the ZX SPECTRUM £7.95

Mr HELPLINE — the man who answers your ZX queries in his column in *Sinclair User*, the author of HINTS & TIPS FOR THE ZX80 and HINTS & TIPS FOR THE ZX81 now presents his 20 BEST PROGRAMS FOR THE ZX SPECTRUM.

* 20 original programs for you to load into your Spectrum.
* 20 interesting programs for you to enjoy and learn from.
* 20 great programs to teach you about fixed and variable length records, binary searches, bubble sorts, floating point arithmetic, graphic displays and much, much more . . .
* **20 BEST PROGRAMS FOR THE ZX SPECTRUM.**

Program Titles Include:

Machine code editor —	Write, modify, exend and load machine code using this all-Basic machine code editor. No need to use an Assembler when you have this program.
Index file —	Learn about fixed length records, save numeric and string fields, add to, sort, modify, delete and print your records. Ideal as a computer based card index.
Duckshoot —	Learn how to manipulate the attribute file *and* have fun at the same time.
Diary —	Binary searches and variable record lengths are explained with this useful and interesting program.

PLUS: FOOTBALL, DIGITISER, DATA PLOT, FUNCTION PLOT, REGRESSION, HISTOGRAM, LINE RENUMBER and many more.

Z80 OP CODES £1.45

A must for the beginner and the experienced programmer alike. This hand ready reckoner lists all 600 plus Z80 machine code instructions in decimal and hexadecimal with their mnemonics. Each Op Code is succinctly explained and cross-referenced. Supplied in a protective transparent wallet for easy reference and durability.

PROGRAMMERS TOOLKIT ZX81 £6.50

Toolkit functions include

* RENUMBER including the determination lines of GOTO's and GOSUB's, START and Finish lines and Step size specified by you
* DELETE part or all of a program at your command
* REPLACE 1 characters or tokens for with an equal number of others specified for you
* EDIT to reveal sub-routines at a stroke by moving block of basic program lines
* FIND a basic program string specified by you
* INPUT prompts for a two digit hexadecimal code and pokes it in at a specified address
* Separate version available for 48 + 8 and 64K memories (needs an 8192)

PILOT ★ ZX81 £5.95

New and exciting. Pilot challenges you to take off, fly between beacons, then land while watching wind speed and dodging craggy mountains – either could lead to disaster. If you take the challenge, you may soon learn to fly solo – to detailed are the flying instructions. Coast along in Autopilot, just to gain confidence, then battle your way through 6 further modes, 6 different ways of trying to steer your plane safely back to base, increasing in difficulty, testing your skills. Good luck with your flight against the unpredictable elements!

PUCKMAN *NEW!* ZX81 £5.95

* All action display
* Scour the maze for food
* Dodge the ghosts who come to devour you
* Automatic option – the machine plays itself
* Full keyboard display
* Full instruction display
* Continuous scoring
* Beat the best score to date
* Super graphics when used with Quick Silva graphics board

ZX81 HARDWARE

16K MEMOPAK (expandable)	£29.90
32K MEMOPAK (expandable)	£49.90
64K MEMOPAK	£79.00
56K Ram pack	£54.95
HRG MEMOPAK Hi Res Graphics	£59.80
MEMOPAK Centronics printer interface	£39.90

ZX81 CASSETTES

SPACE INTRUDERS (16K)	£5.95
STATISTICS (1K)	£3.75
LANGUAGE DICTIONARY (16K)	£3.75
LINE RENUMBER (16K)	£4.95
NAVAL BLOCKADE (16K)	£5.95

ZX81 BOOKS

HINTS & TIPS for the ZX81 £3.95

SPECTRUM

ASSEMBLER/DISASSEMBLER £8.95

- Two programs on one cassette
- Comprehensive instructions
- Great value for money

NIGHT FLIGHT £5.95

For the 16K or 48K SPECTRUM



Fly your own aircraft from take off to landing via navigational beacons, over mountains and using a fully detailed direction finding and instrument landing system. *You are the Pilot of a light aircraft flying at night. *You must use your skill and judgment to fly your aircraft accurately over radio beacons and then land safely on the runway *Hazards are mountains and cross winds *Instruments: Artificial Horizon, Non Directional Beacon, VHF Omnidirectional Range, Instrument Landing System *Readouts: Gear, Flap, Air Speed, Distance Measuring Equipment, Vertical Speed, RPM and heading *Visual display of runway on approach *5 Modes from Take off to Autopilot *Happy landings *WRITTEN BY A QUALIFIED PILOT*

QUANTITY	PRODUCT	COST
	TOTAL	

MAKE CHEQUES/PO's PAYABLE TO: HEWSON CONSULTANTS.

NAME .....
(block capitals please)
ADDRESS .....

.....
My Access/Barclaycard No. is .....

Signed .....
Post to: **HEWSON CONSULTANTS, DEPT YC, 60A ST MARY'S STREET, WALLINGFORD, OXON OX10 0EL. TEL (0491) 36307.**

COMPUTERS–WEST WALES

BBC MICRO'S IN STOCK NOW

MODEL A—**£299**
MODEL B—**£399**

FEATURES INCLUDE:
- ★ 73 KEY FULL TRAVEL KEYBOARD
- ★ HIGH DEFINITION COLOUR GRAPHICS
- ★ 3 VOICE MUSIC SYNTHESIS PLUS 'NOISE'.
- ★ 10 USER DEFINABLE FUNCTION KEYS

PLUS MUCH, MUCH MORE

EXPANSION OPTIONS (MODEL B) INCLUDE:
★ DISC ★ COLOUR MONITOR ★ PRINTERS
★ SPEECH SYNTHESIS ★ PADDLES
★ SECOND PROCESSOR
A/B UPGRADES (SAME DAY BY APPOINTMENT)
£106

WE ALSO STOCK THE ATOM AND ZX81 MICRO'S AND A WIDE SELETION OF COMPUTER SOFTWARE& BOOKS
ALL PRICES INCLUDE VAT AT 15%
SECURICOR DELIVERY £10. POST £3

****

CARDIGAN ELECTRONICS

CHANCERY LANE (NEAR WOOLWORTHS)
CARDIGAN, DYFED
TEL: 0239-614483

HOURS MON/SAT 10 am TO 5 pm CLOSED ALL DAY WEDNESDAY

BBC Micro SOFTWARE

FROM

FERNLEAF MICROSYSTEMS

1. **WORD-EDITOR £12.50 (p+p inc) model B**
   4 pages of text to write, delete, save, load, insert, draw tables, print etc. Package includes Manual. Ideal for almost all writing needs. Drives any printer for frilled printing & special formatting by embedding ASCII codes in text, to printer.
2. **HOME-FINANCE £12.50 (p+p inc) model B**
   Another must for the BBC micro owner. Package manipulates 10 separate accounts; handles direct debit, standing orders, financial forecasts plus printouts, includes manual.
3. **SKY-BIRD £9.00 (p+p inc) model B**
   Incredible game in fast real time graphics, exciting sounds & multi coloured graphics. Guide the flight of the sky-bird behind mountains, avoid the lazer hawk but watch out for unknown dangers behind the hills. Employs skill and returns untold enjoyment for all.
4. **SCREEN-DUMP £6.00 (p+p inc) models A+B**
   Superfast machine code program. Auto adjusts to any mode of user's screen display and dumps screen in 3 selectable sizes with colour discrimination. Includes instructions to use any printer.

We offer quality software to compliment the quality of this micro. We also write software to order. Enquire in writing. Enclose SAE.

Orders to:

Retail dealers offered big discounts

FERNLEAF MICROSYSTEMS
SILVERGROVE INNHAMS WOOD
CROWBOROUGH, SUSSEX TN6 1TE
Tel: Brighton 565303
or Brighton 603191

STAR SOCCER

AN EXCITING NEW GAME FOR THE ZX81 (16K)

- ALL THE ACTION OF REAL FOOTBALL PASS – SHOOT – DRIBBLE – TACKLE CORNERS – FREE KICKS – THROW-INS
- YOU PLAN THE MOVES – SEE THE PLAY IN HIGH SPEED GRAPHICS
- MATCHES BETWEEN 12 TOP CLUB SIDES AND 12 *STAR* WORLD CUP SQUADS
- MORE THAN AN ARCADE GAME MORE THAN A SIMULATION

'A truly original and absorbing game'

ONLY £5.95

Please make cheques and postal orders payable to:

Watson Software Services Ltd.

1, Ivy Cottages, Long Road West, Dedham, Essex CO7 6EL

Allow 14 days for delivery

Software File gives you the opportunity to have your programs, ideas and discoveries published. We will accept contributions for any home computer provided they are submitted to *Your Computer* exclusively. Please double-check your programs and specify the memory they require before sending them, preferably on cassette. We pay between £6 and £36 for contributions published.

Snake

K Feary,
Wendover,
Buckinghamshire.

ZX-81

SNAKE IS FOR an expanded ZX-81, and was inspired by a game which, when reviewed for the BBC Micro, was said to be addictive. The object is to move the snake around the screen so that it can eat plus signs and make its body as long as possible. Any key in the top row will move the snake up. Any key in the bottom row, except Shift, will move it down. Any key on the right of the middle two rows moves it right and any key on the left of the middle two rows moves it left.

Using >,<,A or V the snake's head points in the direction of motion. As it moves more plus signs and obstacles — black squares — appear at random positions. If the head hits an obstacle you must stop pressing the keyboard before changing direction or destroying the obstacle by pressing Shift. If the obstacle does not disappear then you were not trying to move the head into that square and will have to press a key in the direction of the obstacle to be destroyed.

Each obstacle eliminated shortens the snake by one segment. The game ends when the score is zero or when you try to move into a square which has part of the snake's body in one of the four surrounding squares. Each time it moves the characters making up the body are inverted. This gives the illusion of motion and locates the new address of the snake's tail.

The program contains some useful instructions, Exx swaps bc,de,hl for their alternate registers and is shorter and faster than having to Push and Pop all three pairs.

EX (sp),hl

swaps the two bytes at the top of the stack and the contents of hl and saves having to "ld" into a variable. It also demonstrates the use of FD instructions.

These use the iy register which is loaded with 4000h unless you alter it. The bytes after FD are the same as if using hl, except when hl is in brackets, then the third byte must be a displacement measured from iy just like relative jumps. The only exception is

jp(iy)

which would be just FD E9. There are no FD ED instructions nor

ex de,iy

otherwise any instruction using hl will work.

To load the program create Rem lines 1-10, each 43 characters long. Then Poke 16511,230 and Poke 16512,1 to make one long line. Use the often-published hexloader to enter the code, add;

2 RAND USR 16653

and then save before running.

```
4082        disable list    76 76
            SCOR            38 28 34 37
TOP         E:              2A 0E 00 00
Line                        00 00 00 00
                            00 00 00 00
              H             00 00 00 2D
            I-SC            2E 16 38 28
            ORE:            34 37 2A 0E
                            00 00 00 00
40A4        up,left         FF DF 00 20
Test Str    right,down      00 02 00 20
40AC        GAME            AC A6 B2 AA
Game         OVE            80 B4 BB AA
Over        R               B7
40B5 #1     bit 0,(L.FRAMES) FD CB 34 46
            ret z           C8
Test        add a,l         85
Rnd         ret pe          E8
            call #2 Rnd     CD C9 40
            ret nz          C0
            ld (hl),128     36 80
            call #2 Rnd     CD C9 40
            ret nz          C0
            ld (hl),21      36 15
            ret             C9
40C9 #2     ld hl,(SEED)    2A 32 40
     #3     ld de,(HSD LFRM) ED 5B 33 40
Rnd         add hl,de       19
            ld (SEED),hl    22 32 40
            add a,h         84
            and 31          E6 1F
            cp 23           FE 17
            jr nc #3        30 F1
            inc a           3C
            ld b,a          47
            add a,l         85
            and 31          E6 1F
            ld c,a          4F
            call Print At   CD F5 08
            ld hl,(DF.CC)   2A 0E 40
            ld a,(hl)       7E
            cp 8            FE 08
            ret             C9
40EB #4     ld a,(SEGS)     3A 40 40
            neg             ED 44
Play        ld b,a          47
     #5     ld c,16         0E 10
     #6     dec c           0D
            jr nz #6        20 FD
            djnz #5         10 F9
            ret             C9
40F9 #7     ld b,4          06 04
            push hl         E5
Find        ld hl,Test Str  21 A4 40
Sess #8     ld d,(hl)       56
            inc hl          23
            ld e,(hl)       5E
            inc hl          23
            ex (sp),hl      E3
            add hl,de       19
            cp (hl)         BE
            jr z #9         28 03
            ex (sp),hl      E3
            djnz #8         10 F4
     #9     pop de          D1
            ret             C9
410D        ld de,Top Line  11 84 40
            ld bc,32        01 20 00
            call Print Str  CD 6B 0B
            ld a,32         3E 20
            ld hl,(DF.CC)   2A 0E 40
            inc hl          23
            push hl         E5
            ld c,23         0E 17
    #10     ld b,a          47
    #11     ld (hl),8       36 08
            inc hl          23
            djnz #11        10 FB
            inc hl          23
            dec c           0D
            jr nz #10       20 F6
            ld b,a          47
    #12     ld (hl),a       77
            inc hl          23
            djnz #12        10 FC
            pop hl          E1
            ld bc,3,6       01 06 03
            ld (SEGS),b     FD 70 40
            ld (TAIL),hl    22 3E 40
    #13     ld (hl),c       71
            inc hl          23
            djnz #13        10 FC
            ld (DF.SZ),b    FD 70 22
            ld (HEAD),hl    22 3C 40
            ld (hl),18      36 12
            ld (MV),18      FD 36 42 12
            ld c,29         0E 1D
            call Print At   CD F5 08
            ld a,(HI-SCORE) FD 4E 7B
            call Print No.  CD 98 0A
    #14     call #15 Play   CD 50 41
            jr #14          18 FB
4158 #15    call #1 Test RND CD B5 40
    #16     call #4 Play    CD EB 40
Play #17    call Kscan      CD BB 02
            ld a,l          7D
            inc l           2C
            jr z #17        28 F9
            rlca            07
            cp 253          FE FD
            jr nc #18       30 10
            cp 247          FE F7
            jr nc #19       30 14
            cp 223          FE DF
            jr nc #20       30 18
    #18     ld bc,38,59     01 3B 26
            ld de,33        11 21 00
            jr #21          18 0E
    #19     ld bc,18,19     01 13 12
            ld de,-1        11 FF FF
            jr #21          18 06
    #20     ld bc,59,38     01 26 3B
            ld de,-33       11 DF FF
    #21     ld a,(MV)       3A 42 40
            cp b            B8
            jr z #16        28 C5
            ld hl,(TAIL)    2A 3E 40
            ld b,(hl)       46
            ld hl,(HEAD)    2A 3C 40
            ld (hl),c       71
            add hl,de       19
            ld a,(hl)       7E
            cp 118          FE 76
            jr z #16        28 B7
            cp 128          FE 80
            jr nz #24       20 1E
            exx             D9
    #22     call Kscan      CD BB 02
            inc l           2C
            jr nz #22       20 FA
    #23     call Kscan      CD BB 02
            inc h           24
            jr z #23        28 FA
            inc h           24
            jr nz #17       20 A6
            exx             D9
            ld a,8          3E 08
            ld (hl),a       77
            dec (SEGS)      FD 35 40
            jr z #30        28 57
            call #27        CD FB 41
            jr #26          18 29
    #24     push hl         E5
            ld a,b          78
            exx             D9
            pop hl          E1
            call #6 Find Ses CD F9 40
            ld a,b          78
            exx             D9
            and a           A7
            jr nz #31       20 4D
            ld a,(hl)       7E
            cp 8            FE 08
            jr z #25        28 04
            cp 21           FE 15
            jr nz #16       20 B0
    #25     ld (MV),c       FD 71 42
            ld (hl),c       71
            ld (HEAD),hl    22 3C 40
            sbc hl,de       ED 52
            ld (hl),b       70
            cp 21           FE 15
            jr nz #27       20 12
            inc (SEGS)      FD 34 40
            call #28 Chng Ses CD FF 41
41EF #26    ld bc,0,7       01 07 00
            call Print At   CD F5 08
            ld c,(SEGS)     FD 4E 40
            jp Print No.    C3 98 0A
41FB #27    ld hl,(TAIL)    2A 3E 40
            ld (hl),a       77
41FF #28    ld hl,(HEAD)    2A 3C 40
            ld a,b          78
Chng        xor 128         EE 80
Sess        ld c,a          4F
            ld a,b          78
            exx             D9
            ld b,(SEGS)     FD 46 40
    #29     exx             D9
            call #6 Find Sess CD F9 40
```

(continued on next page)

(continued from previous page)

```
      ld (hl),c        71
      exx              D9
      djnz #29         10 F8.
      exx              D9
      ld (TAIL),hl     22 3E 40
      ret              C9
#30   ld hl,(TAIL)     2A 3E 40
      ld (hl),a        77
      call #26         CD EF 41
#31   ld c,(SEGS)      FD 4E 40
      ld a,(HI-SCORE)  3A 7B 40
      cp c             B9
      jr nc #32        30 0F
      ld (HI-SCORE),c  FD 71 7B
      ld b,0           06 00
      push bc          C5
      ld c,29          0E 1D
      call Print At    CD F5 08
      pop bc           C1
      call Print No.   CD 98 0A
#32   ld bc,0.10       01 0A 00
      call Print At    CD F5 08
      ld c,9           0E 09
      ld de,Game Over  11 AC 40
      call Print Str   CD 6B 0B
#33   call Kscan       CD BB 02
      inc l            2C
      jr nz #33        20 FA
      rst 8,#          CF 0D
```

Not centipede

Andrew Weekes,
Truro,
Cornwall.

SPECTRUM

THIS PROGRAM is an entertaining game written for the ZX Spectrum. It is not a version of the popular game of the same name, but it is a completely new game involving manoeuvering a hungry centipede along a tunnel without touching the walls, while eating as many grubs as possible.

The characters used are defined on to the keys Q and P.

Lines	Function
1-40	The introduction
41-48	Defining the graphic characters
70-100	Setting up the screen and variables
110-150	Drawing the tunnel and centipede
155-210	Movement of the display
220-280	Display for losing the game and scoring

The Poke statement — Poke 23692,255 is for Scrolling the screen.

```
  1 FOR x=0 TO 20
 10 PRINT AT 20,0;" CENTIPEDE C
ENTIPEDE CENTIPEDE"
 11 POKE 23692,255: PRINT AT 21
,31;" "
 15 NEXT x
 16 CLS
 20 PRINT : PRINT "  © Andrew W
eekes 15.11.82 "
 21 PRINT : PRINT "  INPUT HARD
NESS LEVEL (2-10)"
 22 INPUT h
 23 IF h>10 THEN GO TO 22
 25 PRINT : PRINT : PRINT
 30 PRINT "      PRESS ANY KEY T
O START": PRINT : PRINT
 35 PRINT "      GOBBLE THE GRUBS
 *": PRINT : PRINT "      WITHOU
T HITTING THE WALLS": PRINT : PR
INT "      LEFT-'Z'          RIGHT
-'M'"
 40 PAUSE 0
 41 FOR x=0 TO 7: READ d
 42 POKE USR "p"+x,d
 43 NEXT x
 44 DATA BIN 00111100,BIN 10111
101,BIN 01100110,BIN 10100101,BI
N 01100110,BIN 10100101,BIN 0111
1110,BIN 00111100
 45 FOR x=0 TO 7: READ d
 46 POKE USR "q"+x,d
 47 NEXT x
 48 DATA BIN 00011000,BIN 00111
100,BIN 10011001,BIN 01111110,BI
N 00111100,BIN 11111111,BIN 0011
1100,BIN 11011011
 50 OVER 1
 60 LET m=0
 70 LET s=0: LET g=0
 80 BORDER 4: PAPER 5: INK 1
 90 LET p=15
100 LET a=10: LET b=20
110 CLS
120 PRINT AT 20,a;".";AT 20,b;"
."
125 IF RND>0.9 THEN PRINT AT 20
,a+((b-a)/2);"*"
130 IF SCREEN$ (15,p)="." THEN
GO TO 220
131 IF SCREEN$ (16,p)="." THEN
GO TO 220
132 IF SCREEN$ (15,p)<>" " THEN
LET g=g+1: BEEP 0.1,0
135 LET s=s+1
140 PRINT ; BRIGHT 8;AT 15,p;"O
"
150 POKE 23692,255: PRINT AT 21
,31;" "
155 RANDOMIZE : RANDOMIZE
160 LET m=INT (RND*h)-(h/2)
161 IF m=0 THEN GO TO 160
162 LET m=m+RND*2
170 IF a>=0 THEN LET a=a+m
175 IF b<=30 THEN LET b=b+m
180 IF a<=0 THEN LET a=a+ABS (m
): LET b=b+ABS (m)
185 IF b>=29 THEN LET b=b-ABS (
m): LET a=a-ABS (m)
190 PRINT AT 15,p;" "
200 LET p=p-(INKEY$="z")+(INKEY
$="m")
210 GO TO 120
220 PRINT ; OVER 0;AT 15,p;"O":
PRINT AT 15,p; OVER 1;"*": PAUS
E 0: BEEP 0.1,-40: BEEP 0.2,-30:
BEEP 0.1,50: BEEP 0.3,0: BEEP 0
.5,-40
230 CLS : FOR p=0 TO 9
240 PRINT "YOU SNUBBED YOUR NOS
E ON THE          TUNNEL WA
LL"
250 NEXT p
251 PAUSE 100
255 CLS : PRINT : PRINT "    YO
U SCORED ";INT (s/10);" POINTS "
256 PRINT : PRINT "    YOU ATE
";g;" GRUBS"
257 PRINT : PRINT "    THAT'S "
;INT ((s/10)+9);" IN TOTAL"
258 PRINT : PRINT
260 PRINT "  DO YOU WANT TO PLA
Y AGAIN ?"
270 PAUSE 0: LET a$=INKEY$: IF
a$<>"y" THEN STOP
280 RUN
```

Four routines

David Graham,
Richmond,
Surrey.

VIC-20

THIS PROGRAM runs on an unexpanded Vic-20. It will not work on an 8K or 16K expanded Vic as the memory-mapped screen changes location. The program is comprised of four machine-code routines. The character set runs through all 255 characters in the Vic memory, with very fast alternating borders and sound. A text window is left in the middle of the screen so that any Basic print statement can be displayed — line 240.

Screen Clear 1 clears the screen or prints any character over the screen. The subroutine at line 300 changes eight bytes in Screen Clear 1 to make it operate in reverse. Character Set 2 prints the whole character set on the screen instantly. Border L is a simple program that runs through the border colour combination for a white screen. This is done so fast in machine-code that very thin lines of colour are seen around the border.

Lines 30 to 210 Poke the decimal code into memory. Lines 220 to 310 are a small demonstration of the machine code just entered. Notice in line 230 the character in strings represents the F1 key pressed once. The character-set routine can be set to run at varying speeds, the slowest speed takes two minutes 48 seconds and the fastest about 1.8 seconds. To change the speed, Poke 868, X — where X is between 1 and 255. The sound of this routine can also be turned off or lowered by Poke 831,X where X is between 0 and 15.

For the Screen Clear 1 routine the character printed can be altered by Poke 915, X where X

is between 0 and 255 in the Vic Poke tables. The speed at which Screen Clear 1 runs can be altered by Poke 940, X where X is between 1 and 255.

The start and finishing addresses are given in Rem statements, between the data for the routines. If you want to alter something permanently, change the data in the data statements.

This is quite easy. For instance, if you wanted to change 831 in the character set routine, simply count from 828 along to 831 in the data statement — the number should be 15 — and change it to what you want.

If you want to alter something temporarily, Poke it in as a direct statement, then Run the line number in which the routine is called, avoiding Running the whole program. The whole program takes up 1,218 bytes and although the machine code is simple, the program produces some spectacular displays.

```
10 REM(C)1982 D.J.N.G.
20 REM * MACHINE-CODE *
30 FORP1=828TO992:READP2:POKEP1,P2:NEXTP1
40 REM CHARACTER SET.
50 REM (828-957)
60 DATA169,0,162,15,142,14,144,162,0,160,0,153,0,30,153,0,31
70 DATA200,192,242,208,245,201,255,240,60,32,94,3,232,138,76,69,3,72,138,72,152,
72,160
80 DATA10
90 DATA140,232,3,160,47,162,215,142,10,144,142,12,144,232,224,241,208,245,140,15
,144,136
100 DATA192,40,208,235,206,232,3,208,228,162,0,142,10,144,142,12,144,104,168,104
,170,104
110 DATA96
120 REM SCREEN CLEAR1
130 REM (914-957)
140 DATA169,32,160,0,162,241,153,0,30,157,0,31,32,168,3,200,202,192,242,208,241,
96,72,138
150 DATA72,162,1,142,252,3,162,255,202,208,253,206,252,3,208,248,104,170,104,96
160 REM CHARACTER SET2
170 REM (958-971)
180 DATA168,0,169,0,153,242,30,200,152,192,255,208,247,96
190 REM BORDER 1
200 REM (972-992)
210 DATA162,255,142,247,3,162,31,142,15,144,202,224,24,208,248,206,247,3,208,241
,96
220 PRINT"▒▒▒
```

(continued from previous page)

```
260 ?9PL,PL*;
270 IF BL>140B AND (V=31 OR V=33) THEN BL=BL+32:GOTO 290
280 BL=BL+V
290 IF PEEK(BL)<>143 THEN 430
300 ?9480,"**SCORE=";S;"**";
310 POKE BL,79
320 FORC=0 TO 8S:NEXT C
330 T*=INKEY$
340 IF T*="" THEN T*=P*
350 P*=T*
360 IF T*<>RI* AND T*<>LI* THEN 250
370 ?9PL,SC*;
380 IF T*=RI* THEN PL=PL+2
390 IF T*=LI* THEN PL=PL-2
400 IF PL<417 THEN PL=417
410 IF PL>447-SZ THEN PL=447-SZ
420 GOTO 250
430 A=PEEK(BL):IF A<>172 THEN SOUND 1,1 ELSE SOUND 10,1
440 IF A=128 THEN V=-V:GOTO280
450 IF A=140 THEN RW=RW+1:PLAY"T255V10DEFGABCCDBAGFED":GOTO 70
460 IF A=133 THEN 550
470 IF A=138 THEN 530
480 IF A=172 THEN 690
490 IF A<>131 THEN 570
500 "**HIT BALL**"
510 IF V=31 THEN V=-33:GOTO 280
520 IF V=33 THEN V=-31:GOTO 280
530 IF V=31 THEN V=33:GOTO 280
540 IF V=-33 THEN V=-31:GOTO 280
550 IF V=33 THEN V=31:GOTO 280
560 IF V=-31 THEN V=-33:GOTO 280
570 "**SCORES**"
580 IF A=174 THEN S=S+100
590 IF A=190 THEN S=S+75
600 IF A=254 THEN S=S+50
610 IF A=222 THEN S=S+20*(RW-1)
620 IF V=-33 THEN V=-31:GOTO 640
630 IF V=-31 THEN V=33
640 POKE BL,143
650 ST=BL
660 BL=BL+RND(3)-2
670 IF PEEK(BL)=133 OR PEEK(BL)=138 THEN BL=ST
680 GOTO 280
690 ?9359,"PRESS THE '9' KEY";
700 IF INKEY$<>"9" THEN 700
710 CLS:
720 SOUND 89,1
730 IF H>B THEN 900
740 H=B
750 CLS3
760 A$="":FORA=1 TO 32:A$=A$+CHR$(159):NEXTA
770 ?80,A$;
780 ?8448,A$;
790 ?832,"*********************************"
800 ?864,"* YOU HAVE GOT THE HIGH SCORE  *"
810 ?896,"*********************************"
820 ?9160,"PLEASE TYPE THE NAME YOU WISH TO"
830 ?9224,"BE KNOWN BY & PRESS THE 'ENTER'"
840 ?9288,"KEY.(MAX.12 LETTERS)."
850 INPUTN$:IF LEN(N$)>12 THEN N$=LEFT$(N$,12)
860 ?8384,"IS THIS CORRECT(Y/N)?"
870 INPUT Y$
880 IF Y$="N" THEN 750
890 IF Y$="Y" THEN SOUND 1,1:GOTO 860
900 CLS8
910 A$="":FORA=1 TO 32:A$=A$+CHR$(191):NEXTA
920 ?80,A$;:?8448,A$;
930 ?864,"****BREAKOUT BY PAUL JOHNSON****"
940 ?896,"--------------------------------"
950 A$="                                  "
960 P*=(16+LEN(STR$(H)))
970 L*=LEFT$(A$,(32-P)/2)+"**HIGH SCORE "+STR$(H)+" **"
980 ?9160,L*
990 P=14+LEN(N$)
1000 L*=LEFT$(A$,(32-P)/2)+"**HELD BY "+N$+" **"
1010 ?9224,L*
1020 ?9288,"--------------------------------"
1030 ?9352,"THE LAST SCORE WAS";S
1040 ?9416,"PRESS '9' FOR NEXT GAME"
1050 ?9480,"(PRESS 'C' TO ALTER CONTROLS)";
1060 T*=INKEY$
1070 IF T*="C" THEN 1110
1080 IF T*<>"9" THEN 1060
1090 PLAY"T255V10ABABABABABABABABABABABABABABAAT&AB"
1100 GOTO 60
1110 CLS
1120 ?833,"KEY FOR RIGHT";:INPUTRI*
1130 ?897,"KEY FOR LEFT";:INPUTLI*
1140 ?9161,"BALL SPEED(0-40)";:INPUTBS
1150 IFBS<0 OR BS>40 THEN 1140
1160 ?9256,"BAT SIZE(1-7)";:INPUTSZ
1170 IF SZ<1 OR SZ>7 THEN 1160
1180 GOTO 60
```

Typewriter

David Prideaux,
Crownhill,
Plymouth.

BBC

HERE IS A program which provides the basic facilities of an electronic typewriter for letter-writing, namely continuous-text entry, editing for errors and justification of the right-hand margin.

The printer codes used are for the Epson range of printers: no doubt the procedure ProcMenu could be adapted to suit other printers. In terms of memory requirement the program should run on BBC Model A micros, but for the most effective display mode 0 is used and this demands a Model B.

The program uses a series of procedures, starting with ProcLine which reads characters from the keyboard and puts them into a string A$, until it exceeds the length of a line W. The complete line is then put into an array Print$, while the remainder of A$ goes on to have further text added to it.

Three control characters are entered in the text, cursor right for Newline — line 240 — the Tab key for a new paragraph — line 250 — and Return on completion to process the text — line 200. ProcCheck steps through the entered text in the array, a line at a time, giving options to accept the line, correct it or pad it out to justify the right-hand margin, by adding spaces — ProcPad. Finally, ProcPrint reads the contents of the modified array to the printer.

The test used to recognise the end of a word in the text is by locating spaces. Consequently the neatest effect is achieved by placing punctuation marks immediately after a word, with no intervening space, and always following punctuation marks with a space — except for open quotation marks.

```
  10 REM              **TYPIST**
  20 REM       (c) David Prideaux 1982
  30 *TV255
  40 MODE0
  50 ONERROR GOTO980
  60 VDU19,0,4;10;
  70 PRINT"" FORMAT;""" A5 : 41 lines, 50 wide.  A4 : 60 lines, 75 wide. (Nor
mal print)"""                 79 wide.                    (Condensed print)"
  80 INPUT"Please enter required printing width "W
  90 DIM Print$(60):DIM L(W):lno=1:A$=""
 100 *FX4,1
 110 CLS
 120 PRINT"" Ignore mistakes while typing in your script. "" Use cursor -> for
 new line, TAB for new paragraph, RETURN when finished."" Please start typing."

 130 MOVE W*16,1024:DRAW W*16,0
 140 Y=VPOS+2
 150 FOR line=1 TO 60:PROCline:NEXT
 160 END
 170 REM      *PROCEDURES*
 180 DEFPROCline
 190 G=GET:A$=A$+CHR$(G)
 200 IF G<>13 GOTO240
 210 NOL=lno+1
 220 Print$(lno+1)=A$: PROCcheck
 230 PROCprint:END
 240 IF G<>137 GOTO250 ELSE Print$(lno+1)=A$:A$="":lno=lno+1:Y=Y+1
 250 IF G<>9 GOTO260 ELSE Print$(lno+1)=A$:A$="            ":lno=lno+2:Y=Y+2
 260 PRINTTAB(0,Y):A$:TAB(W+2):lno
 270 IF LEN(A$)<=W GOTO190
 280 PRINTTAB(0,Y):SPC(W+1)
 290 MOVE W*16,1024:DRAW W*16,0
 300 lno=lno+1:N=W+1
 310 REPEAT
 320   N=N-1:P$=LEFT$(A$,N)
 330   UNTILASC(MID$(A$,N,1))=32
 340 A$=RIGHT$(A$,LEN(A$)-N)
 350 Print$(lno)=P$
 360 PRINTTAB(0,Y):P$
 370 Y=Y+1:IF Y>22 Y=1
 380 ENDPROC
 390 DEFPROCprint
 400 *FX15,0
 410 *FX4,0
 420 VDU1,27,1,56:REM Cancel paper-out alarm
 430 PRINTTAB(0,NOL+1):"Do you want printer on? (Y/N)":R=GET:CLS:IF R=89 OR R=1
21 PROCmenu:VDU2
 440 MOVE W*16,1024:DRAW W*16,0
 450 FOR N=1TO NOL:PRINTPrint$(N):NEXT:VDU3
 460 VDU1,27,1,70;1,18;1,27,1,87,1,0;1,27,1,72:REM Cancel print options
 470 ENDPROC
 480 DEFPROCcheck
 490 CLS
 500 PRINTTAB(10,0):"Line check"
 510 FOR N=1TO1500:NEXT
 520 FOR N=0TO NOL
 530   MOVE W*16,1024:DRAW W*16,0
 540   PRINTTAB(0,N):Print$(N):TAB(65,0):"Line ";N
 550   PRINTTAB(0,0):"Is line correct? N to edit, SPACE if OK, RETURN to justif
```

```
'-'
 560   T=GET:IF T=13 PROCpad:GOTO620
 570   IF T=32 GOTO620,
 580   *FX4,0
 590   VDU11
 600   PRINT"Copy line with correction,then RETURN.":SPC(23):INPUTLINE"" Print$
(N)
 610   N=N-1: PRINTTAB(0,1):SPC(W)
 620   PRINTTAB(0,N):Print$(N):PRINTTAB(0,N+1):Print$(N+1):NEXT
 630 ENDPROC
 640 DEFPROCpad
 650 IF INSTR(Print$(N),"          ")=1 PAR=1 ELSE PAR=1
 660 SP=0:B$=""
 670 FOR B=PAR TO W
 680   IF ASC(MID$(Print$(N),S,1))=32 AND ASC(MID$(Print$(N),S+1,1))=32 S=S+1:G
OTO680
 690   IF ASC(MID$(Print$(N),S,1))=32 SP=SP+1:L(SP)=S:B$=B$+MID$(Print$(N),L(SP
-1)+1,S-L(SP-1)-1)
 700   NEXTS
 710 Print$(N)=""
 720 Y=(W-LEN(B$)-1)DIV(SP-1)
 730 V=(W-LEN(B$)-1)MOD(SP-1)
 740 Y$="":U$=""
 750 FOR R=1 TO Y:Y$=Y$+" ":NEXT
 760 U$=Y$+" "
 770 FOR T=1TOSP
 780   IF T<=V/2 OR T>(SP-1-(V/2)) ADD$=U$ ELSE ADD$=Y$
 790   IF T=SP ADD$=""
 800   Print$(N)=Print$(N)+MID$(B$,L(T-1)-T+2,L(T)-L(T-1)-1)+ADD$
 810   NEXTT
 820 ENDPROC
 830 DEFPROCmenu
 840 CLS
 850 PRINTTAB(10,5)"Select print font: """ 1 Condensed print"" 2 Normal pri
nt"" 3 Enlarged print"" 4 Emphasised print"" 5 Doubled print"
 860 font=GET-48:IF font>5 GOTO850
 870 PRINT"" 6 Erase last choices"
 880 PRINT"You have selected ";font
 890 REM Epson print codes
 900 IF font=1 VDU1,15
 910 IF font=3 VDU1,27,1,87,1,1
 920 IF font=4 VDU1,27,1,69
 930 IF font=5 VDU1,27,1,71

 940 IF font=6 VDU1,27,1,70:1,18:1,27,1,87,1,0:1,27,1,72
 950 PRINT"Do you want another choice? (Y-6 or N)":R=GET-48:IF R<7 font=R:GOTO8
80 ELSE IF R<38 AND R>62 GOTO950
 960 CLS
 970 ENDPROC
 980 *FX4,0
 990 REPORT:PRINT" AT ";ERL
```

Change goals

George Thordian,
Kidderminster,
Worcestershire.

VIC-20

WRITTEN FOR the unexpanded Vic-20, this program is based on the old pinball game.

Lines 30-100 set up the arrangement of bumpers. These can be moved around according to taste, the ball bouncing off any of these symbols wherever it finds them.

Line 110 sets up the goal to be defended. This too may be extended to add extra difficulty.

Thus we have a game easily changed to produce a new game and reduce the chance of learning the game by rote. Throughout the program square brackets indicate a control key and curly brackets indicate cursor key movements with repetitions.

RHT = RIGHT
LFT = LEFT
UP = UP
DWN = DOWN

Graphic symbols are shown by their shifted key; other keys are shown as on the keyboard.

```
10 ?"[RED][CLR]     PINBALL WIZARD[BLU]{DWN}":GOSUB650
20 F=1:G=1
30 ?"[CLR][YEL]{RHT5}*{DWN2}{LFT2}*{RHT}*";
40 Y=INT(RND(1)*18)
50 IF Y>7 AND Y<11 THEN 40
60 ?"[PUR]{RHT6}{DWN}{SHFTZ}{RHT2}{SHFTZ}{DWN3}{LFT3}{SHFTZ}{RHT2}{SHFTZ}";
70 ?"[YEL]{DWN4}*{DWN2}{LFT}*{DWN2}{LFT}*";
80 ?"[BLK]{LFT6}{UP3}{SHFTU}{SHFTI}{DWN}{LFT2}{SHFTJ}{SHFTK}"
90 ?"[YEL]{DWN5}{RHT4}*{DWN2}*{UP2}*";
100 ?"[PUR]{DWN2}{RHT6}{SHFTZ}{RHT}{UP2}{SHFTZ}{RHT}{UP2}{SHFTZ}"
110 ?"{HME}[RED]{RHT}{DWN8}{SHFTV}{DWN}{LFT}{SHFTV}{DWN}{LFT}{SHFTV}"
120 FOR B=0TO21
130 POKE 38840+B,2
140 POKE 8120+B,119
150 NEXT B
160 REM PLAYERS MOVE
170 POKE 38402+P*22,6
180 POKE 7682+P*22,117
190 GET A$:GOSUB 260
200 IF A$="B"OR A$="Y" THEN 20
210 ?"{HME}[BLK]{DWN21}SCORE="SC:IF A$=""THEN 190
220 POKE 7682+P*22,32
230 IF A$="{DWN}"THEN P=P+1
240 IF A$="{UP}"THEN P=P-1
250 GOTO 160
260 REM BALL MOVES
270 POKE 7680+X+Y*22,32
280 X=X+F:Y=Y+G
290 H=PEEK(7680+X+Y*22)
300 IF H<>32 THEN 360
310 POKE 38400+X+Y*22,5
320 POKE 7680+X+Y*22,81
330 IF X=21 OR X=0 THEN F=-F
340 IF Y=19 OR Y=0 THEN G=-G
350 RETURN
360 IF H=117 THEN F=-F:X=X+F:SC=SC+2:N=190
370 IF H=42 THEN F=-F:X=X+F:SC=SC+20:N=220
380 IF H=90 THEN G=-G:Y=Y+G:SC=SC+10:N=220
390 IF H=73 OR H=74 OR H=75 OR H=85 THEN G=-G:Y=Y+G:SC=SC+50:N=220
400 IF H=86 THEN 440
410 T=50:GOSUB 600
420 GOTO 310
```

(continued on next page)

(continued from previous page)

```
430 REM BALL LOST
440 Q=Q+1:IF Q=5 THEN 510
450 N=129:T=200:GOSUB 600
460 ?"{CLR}{RHT2}{UP2}OOPS!!"
470 ?"[RVS ON]{RHT2}{DWN2}BALL "Q"{DWN2}{LFT5}PRESS B"
480 GET A$:IF A$<>"B" THEN 480
490 RETURN
500 REM LAST BALL
510 N=129:T=300:GOSUB 600
520 ?"[RED]{CLR}[RVS ON]{DWN2}OH DEAR NO MORE BALLS"
530 ?"{DWN2}STILL,"SC"{SN'T BAD":IF SC<HS THEN 560
540 GOSUB 730
550 HS=SC:?"{DWN}YOU'RE THE PINBALL    WIZARD":GOTO 570
560 ?"THE PINBALL WIZARD    SCORED "HS
570 INPUT"{DWN}TRY AGAIN(Y/N)";A$
580 IF A$="Y" THEN SC=0:Q=0:RETURN
590 END
600 V=36878:S=36874
610 POKE V,9
620 POKE S,N
630 FOR M=1 TOT:NEXT M
640 RETURN
650 ?"DEFEND THE CROSSES ON THE LEFT OF THE SCREENFROM THE GREEN BALL"
660 ?"{DWN}CONTROL YOUR BAT BY MEANS OF THE CRSR KEYS"
670 ?"{DWN2}SCORECARD;{DWN}{LFT}[YEL]*[BLU]=10 PTS{DWN}{LFT7}[PUR]{SHFTZ}[BLU]=2
0 PTS"
680 ?"[BLK]            {DWN}{LFT2}{SHFTU}{SHFTI}{DWN}{LFT2}{SHFTJ}{SHFTK}[BLU]=50
PTS"
690 ?"EACH TIME YOU BLOCK THE BALL SCORE AN EXTRA 2 PTS"
700 ?"PRESS ANY KEY"
710 GET A$:IF A$="" THEN 710
720 RETURN
730 V=36878
740 RESTORE
750 FOR A=1 TO12
760 READN,T
770 FOR L=1 TON
780 POKE 36874,T
790 POKE V,8
800 NEXT L
810 POKE V,0
820 NEXTA
830 DATA 25,195,25,195,50,209,50,215,25,219,50,219,25,195,25,209,25,209,25,215,2
5,215
840 DATA 50,219
850 RETURN
```

Serpent

N J Page,
Kingston-Upon-Thames,
Surrey.

SPECTRUM

YOU ARE a snake, hungrily scouring the screen for food, which comes in the form of a flashing blue number. Every time you eat a number, you grow by that number of segments, and another one appears somewhere else on the screen. But watch that you don't touch the electrified walls, or go into your own body, or you will die.

You control the head of the snake with the cursor control keys, and the rest of his body will follow. Your score, which is displayed at the end of each game, is based on the number of segments in your body.

If you would like a bit of sound, and do not mind losing some speed, add the following line: 67 BEEP .01,(LEN a$/10)-20

```
1 DATA 60,126,189,189,189,189,126,189
2 FOR  f = 0 TO 7:READ t:POKE USR "a" + f,t:NEXT f
3 LET b$ = "8":BORDER 2:PAPER 7:LET c = 0:CLS
5 LET x = 10:LET y = 19:LET a$ = ""
10 FOR f = 10 TO 19:LET a$ = a$ + "10" + STR$ f:PRINT BRIGHT 1;
   INK 0;AT 10,f;"A":NEXT f
20 GOSUB 165
30 LET Z$ = INKEY$:IF Z$ > "4" AND Z$ < "9" THEN LET b$ = Z$
40 LET x = x + (b$ = "6") - (b$ = "7"):LET y = y + (b$ = "8")
   - (b$ = "5")
45 IF ATTR (x,y) = 120 OR x = 22 OR y = 32 THEN GOTO 500
```

```
47 GOSUB 150
50 LET c$ = STR$ x: IF x < 10 THEN LET c$ = " " + STR$ x
55 LET d$ = STR$ y: IF y < 10 THEN LET d$ = " " + STR$ y
60 LET x1 = VAL a$( TO 2): LET y1 = VAL a$(3 TO 4):
   IF ATTR(x1,y1) <> 120 THEN GOTO 62
61 PRINT AT x1,y1;" "
65 PRINT BRIGHT 1;INK 0;AT x,y;"A"
70 LET a$=a$+c$+d$:IF c = 0 THEN LET a$ = a$(5 TO)
75 LET c = c - (c > 0)
100 GOTO 30
150 LET f$ = SCREEN$ (x,y): IF f$ > "9" OR f$ < "1" THEN RETURN
160 LET c = c + VAL f$
163 BEEP .01,0: BEEP 0.01,10: BEEP 0.01,20
165 PRINT FLASH 1;BRIGHT 1;PAPER 4;AT (RND*22)-1,(RND*32)-1;
    INT (RND*9)+1:RETURN
500 LET x = x -(x=22)+(x=-1):LET y = y -(y=32)+(y=-1)
505 PRINT AT x,y;FLASH 1;"A";AT 10,5;"SCORE = ";(LEN a$/4)-10
510 FOR f = 20 TO -50 STEP -5:BEEP 0.02,f:NEXT f
520 FOR f = 1 TO 200:NEXT f
525 IF INKEY$ = "" THEN GOTO 525
530 CLS: GOTO 3
NOTE: The "A" in lines 10, 65 and 505 is obtained when in
      the graphics mode.
```

Sound graph

Christopher Woods,
Sutton Coldfield,
West Midlands.

DRAGON

THIS SHORT program demonstrates how sound can be detected via the cassette port on the Dragon 32. To see it in action, type in the program, run it and then play music through the cassette port as if you were loading a program. You should see an oscilloscope — like graph of the music volume.

For best results the volume level on the cassette recorder should be adjusted so that two sizes of peaks can be seen. The two Peeks 65312 and 65314 detect quiet and loud noise respectively. This idea could be developed into something like a speech-recognition device.

```
10 REM VOLUME GRAPH BY C.WOODS
20 AUDIOON
30 PMODE4:PCLS:SCREEN1,1
40 LINE-(0,180),PRESET
50 FOR X=0 TO 255 STEP 5
60 IF PEEK(65312)=1 THEN Y=180 ELSE Y=100
70 IF PEEK(65314)<>255 THEN Y=20
80 LINE-(X,Y),PSET
90 NEXT X
100 PCLS
110 GOTO 40
```

3D-maze

P J Heslop,
South Shields,
Tyne and Wear.

VIC-20

OWNING A ZX-81 the ground work for this program was done on that computer, but a Pet provided better graphics so 3D-MAZE runs in just over 2K on any Pet. However, it can be converted to the Vic-20. The object of the game is to escape a eight-by-eight maze using perspective diagrams of your current location, which are renewed after every move.

There is a 20-second delay as the computer generates a random maze during which time instructions are displayed. Basically 4 rotates you 90 degrees left; 6 rotates you 90 degrees right, and 8 moves you forward.

The display takes a little getting used to but flats at the appropriate edge of the screen denote a turn. To convert this program for the Vic-20 make the following changes:

560 T=SX:Z=SY:L7702:R=7722: D=440
632 T=T+XM:Z=Z+YM:L=L+23:R=R+21: D=D-44
9520 FOR H=22 TO D-22 STEP 22:POKE L+H, 103:POKE R+H,101: NEXT H:RETURN

5000-6000 the instructions, and 6010-6070 the end display, should be changed as desired and appropriate colours selected by the user.

```
220 GOSUB5000
230 FOR X=1TO8
240 M(1,X)=M(1,X)+8
250 M(8,X)=M(8,X)+2
260 M(X,1)=M(X,1)+1
270 M(X,8)=M(X,8)+4
280 NEXT
290 FORX=1 TO 8
300 FORY=1 TO 8
310 R=M(X,Y):O=2:IFX=1 THEN360
320 A=M(X-1,Y):O=A
330 GOSUB5900
340 IF R(3)=1 THEN R=R+8
360 P=4:IFY=1 THEN 400
370 A=M(X,Y-1):P=A
380 GOSUB 5900
390 IF R(2)=1 THEN R=R+1
400 IF X=8 ORY=8 THEN GOTO 4000
410 S=3:I=0:IF O=0ORP=0OR R=0 THEN S=S-1
420 IF S=2 THEN I=1
430 R=R+INT(RND(TI)*S+I)*2
500 M(X,Y)=R
510 NEXTY
520 NEXTX
540 X=INT(RND(TI)*7+1):M(1,X)=M(1,X)-8
550 SX=INT(RND(TI)*4+3):SY=INT(RND(TI)*4+3)
555 XM=INT(RND(TI)*3-1):YM=0:IFXM=0THEN YM=INT(RND(TI)*2)*2-1
560 LET T=SX:Z=SY:L=32817:R=32837:D=800
```

(continued on page 127)

MIDWICH COMPUTER COMPANY LIMITED

FAST EX-STOCK DELIVERY OF MICROCOMPUTER COMPONENTS AT UNBEATABLE PRICES

MIDWICH NOW APPOINTED OFFICIAL ACORN BBC MICRO DEALER

ACORN ATOM UPGRADES

Description	Price
*Atom disc pack (AAH06)	298.00**
*Atom colour card (AAH07)	36.25**
*1K Atom DOS (AAS41)	60.00**
*4K FP ROM (AAS22)	20.00
*BBC ROM Set (XXXXX)	43.43**

BBC Microcomputer Upgrades

*Memory Upgrade (BBC1)	21.50
*Printer & User I/O kit (BBC2)	7.60
*F. Disc interface inc DOS (BBC3)	70.00
*Analogue input kit (BBC4)	7.60
*Serial I/O & RGB kit (BBC5)	10.25
*Expansion bus & tube kit (BBC6)	5.95
*Printer cable inc Amphenol plug (not assembled) (BBC21)	13.00
*User port connector & cable (BBC22)	2.00
*Analogue input plug & cover (BBC44)	2.25
*5 pin DIN plug for serial1 (BBC111)	0.60
*6 pin DIN plug for RGB int (BBC109)	0.60
*7 pin DIN plug for cassette (BBC141)	0.60
*Connector for bus & cable (BBC66)	3.50
*Single disc drive (000K) (BBC31)	225.00*
*Dual disc drives (BBC32)	345.00*
*Games Paddles (per pair) (BBC45)	11.30

*Prices on these items are likely to change please contact sales office before ordering.
As some items are on extended delivery from Acorn please check availability before ordering items marked **

NEW JOYSTICKS AND CONTROLLER FOR ZX81 AND SPECTRUM

★ Controls 1 or 2 Joysticks
★ Fire Button Facility (1 or 2)
★ Easy to use
★ Plugs straight into Expansion Slot
★ Edge Connector provided for RAM Pack Discs etc

*Joystick Controller (kit)	14.95 ex
*Joystick Controller (Assem)	19.95 ex
Joystick (uncased)	3.00 ex
Fire Buttons (uncased)	1.50 ex

*Please specify ZX81 or SPECTRUM when ordering
(All Kits supplied with full assembly instructions)

MEMORIES

2114 Low Power 200ns	0.80
2708 450ns	2.70
2716 450ns (+5V)	2.10
2716 350ns (+5V)	3.50
2716 450ns (3 Rail)	5.95
2732 350ns	4.40
2732 450ns	3.20
2532 450ns	3.20
2564 450ns	9.90
2764 450ns	9.99
4116 150ns	1.10
4116 200ns	0.75
4118 150ns	3.30
4164 200ns f.1	4.65
4164 200ns NEC	4.95
4516/4816 150ns	2.90
5516 250ns	9.30
6116 P3 150ns	3.85
6116 LP3 150ns	5.75

★ SPECIAL LOW PRICES FOR QUANTITIES ★

2114 Low Power 200ns	0.80
4516/4816 100ns	2.66
6522	2.99
74LS244	0.59
74LS245	0.89
81LS97	0.90
DP8304	4.50
DS3691N	4.50
DS88LS120N	4.50
20 way Right Angle IDC Header	2.46
26 way Right Angle IDC Header	3.24
34 way Right Angle IDC Header	3.80
15 way Right Angle D SKT	3.50

ACORN & BBC MICRO COMPONENTS

VISA

24 Hour Telephone order service for credit card holders.
All prices exclude VAT and carriage (0.75 on orders under £10 net)
Official orders from educational and government establishments, and public companies accepted. Credit accounts available to others (subject to status)
All orders despatched on day of receipt. Out of stock items will follow on automatically at our discretion or a refund will be given if requested.
NO SURCHARGE FOR CREDIT CARD ORDERS

MIDWICH COMPUTER CO LTD

DEPT YC. RICKINGHALL HOUSE, RICKINGHALL, SUFFOLK IP22 1HH
TELEPHONE (0379) DISS 898571

SF GOBBLERS

PUCKMAN FOR 16K ZX81

BEAT THAT HIGH SCORE! GOBBLE THOSE DOTS BEFORE THOSE MEANIES GOBBLE YOU! YOUR ONLY AIDES ARE FOUR "POWER PILLS" WHICH MAKE THE MEANIES EDIBLE. BUT NOT FOR LONG!

- MACHINE CODED FOR FAST ACTION
- EXTRA "GOBBLER" FOR 10,000 POINTS
- ON SCREEN SCORING
- HIGH SCORE WITH "ENTER NAME" FACILITY
- UP TO 4 PLAYERS

AN ANNOYINGLY FRUSTRATING GAME! FOR ONLY £5.95

SF ASTEROIDS

FOR 16K ZX81

STAY ALIVE AS LONG AS POSSIBLE IN OPEN SPACE FILLED WITH FLYING ROCKS. SCORE BY SHOOTING THEM – WHICH ALSO CAUSES THEM TO BREAK INTO LOTS OF LITTLE BITS AND MAKES LIFE EVEN WORSE!

- MACHINE CODED FOR FAST ACTION
- ON SCREEN SCORING
- HIGH SCORE WITH 'ENTER NAME' FACILITY
- UP TO 4 PLAYERS
- EXTRA SHIP FOR 1,000 PTS (NOT AS EASY AS IT SOUNDS!)
- SHIP MOVES JUST LIKE ARCADE VERSION
- ROTATE LEFT/ROTATE RIGHT/THRUST
- FIRES IN ALL 8 DIRECTIONS
- INCREASING NUMBER OF ASTEROIDS
- THREE ASTEROID SIZES
- 'NASTY' ALIEN SPACE-SHIP (FIRES BACK!)

THIS GAME IS JUST AS BAD! – AND ONLY £5.95
AN OFFER FOR REAL MASOCHISTS – BOTH TAPES FOR £9.95

MAIL ORDER ONLY-PLEASE MAKE CHEQUE/PO PAYABLE TO
THE SOFTWARE FARM DEPT B
SF CRAIGO FARM. BOTANY BAY. TINTERN, GWENT SF

ZX81 GAMES

from

J.K. GREYE SOFTWARE LTD

THE NEW GENERATION SOFTWARE HOUSE

"Without question the finest machine code games available today!"..... J.N. ROWLAND Product Manager for W.H. SMITH.

GAMESTAPE 1 for 1K _____ only £3.95
10 Games incl. ASTEROIDS, UFO, CODE, BOMBER, GUILLOTINE, KALEIDESCOPE, etc.
PROBABLY THE BEST VALUE 1k TAPE AVAILABLE.

We've done in 1k, games which some of our competitors require 16k to do!

GAMESTAPE 2 for 16K _____ only £3.95
***STARFIGHTER** Superb machine code Space Battle. Set against a background of twinkling stars, with stunning explosions – if you can hit the enemy!
PYRAMID Can you move the Pyramid? Make a mistake and it will collapse! A Thinkers game.
ARTIST The ultimate Graphic Designers aid. 8 Directions, 10 Memories, SAVE, COPY, RUBOUT, CLS, etc.

GAMESTAPE 3 for 16K _____ only £4.95
***CATACOMBS** A Multi-Level Graphics Adventure. Each level can contain up to 9 Rooms, 8 Passages, 7 Monsters, Food, Gold, Traps, Phantoms, an Exit (to the next level), and there's an infinite number of levels.
NOTE. . . . . This is NOT one of the necessarily limited text Adventures as sold elsewhere.
"An excellent addictive game which will keep you amused for hours.". . . . *COMPUTER & VIDEO GAMES.*

GAMESTAPE 4 for 16K _____ only £4.95
***3D MONSTER MAZE** The Game to Top All Others. Unbelievable Graphics! Can you find your way through the Maze? The EXIT is there somewhere, but then so is a T.REX, and its after YOU! All in 3D (the T.REX will actually run towards you in full perspective!), you've never seen anything like this before!
"3D MONSTER MAZE is the best game I have seen for the ZX81". . . COMPUTER & VIDEO GAMES

"If I had to choose just one programme to impress an audience with the capabilities of the ZX81, then J.K. Greye's 3D MONSTER MAZE would be the one without doubt" . . . . . ZX COMPUTING. *"Brilliant, brilliant,brilliant"*... *POPULAR COMPUTING WEEKLY*

GAMESTAPE 5 for 16K _____ only £4.95
***3D DEFENDER** The Ultimate Space Game. Super fast Machine Code 3D version of the Arcade favourite. You have to save your home planet from the marauding Alien Spacecraft. This is all in 3D, your viewscreen shows you the view out of your fighters cockpit window. The backdrop moves when you turn, or fly up or down (8 flight directions), just as if you were really flying !!! But then YOU ARE! The Enemy Saucers will actually zoom towards you in 3D, and shoot you if you let them! Your display includes Score, Shield Strength, Altitude, Proximity, Forward Radar and your viewscreen, which shows your rotating home planet, backdrop of Stars, Meteors, Explosions, Plasma Blasts, your Photon Beams, up to 4 Enemy Saucers and of course its all in full 3D!
"Another 3D winner"..... *SINCLAIR USER*

GAMESTAPE 6 for 1K _____ only £1.95
***BREAKOUT** Super Fast Full Screen Display Game. Your all time favourite with an added twist. See how much Money you can win and watch the pounds convert to Dollars. All in Machine Code for Fast Action with 3 Speeds, 2 Bat Sizes and three angles of rebound! The best BREAKOUT around and at this price you can't go wrong!
"The best of its kind" ..... *WHICH MICRO & SOFTWARE REVIEW*

GAMES MARKED * INCL. MACHINE CODE.
Prices include VAT and U.K. P. & P.
(Add appropriate Postage on Foreign Orders). Cheques/P.O.s to

J.K. GREYE SOFTWARE LTD

Dept YC 16, Brendan Close, Oldland Common, Bristol BS15 6QE

CREDIT CARD SALES: FOR INSTANT DESPATCH, **BY PHONE ONLY**
TEL: 01-930-9232 (9 am - 7 pm)

If you prefer to see before buying, our range of **GAMESTAPES** are stocked by the following stores.

BUFFER MICROSHOP	374A Streatham High Rd., London SW16:
GAMER	24 Gloucester Rd., Brighton;
GEORGES	88 Park St., Bristol, Avon;
MICROSTYLE	29 Belvedere, Lansdown Rd.,Bath, Avon;
MICROWARE	131 Melton Rd., Leicester;
SCREEN SCENE	144 St. Georges Rd., Cheltenham, Glos;
W.H. SMITH	Over 200 Computer Branches;
ZEDXTRA	5 School Lane, Kinson, Bournemouth, Dorset:

TRADE & EXPORT ENQUIRIES WELCOME

(continued from page 125)

```
565 PRINT"□"
570 FOR X=1TO8
580 GOSUB 8000
590 GOSUB 9900
600 POKEL,77:POKER,78:POKEL+D,78:POKER+D,77
610 IFR(4)=0THENPOKEL,100:POKEL+D,99
620 IFR(2)=0THENPOKER,100:POKER+D,99
625 GOSUB9520
630 IFR(1)=1THEN 9500
632 T=X*M:Z=Z+YM:L=L+41:R=R+39:D=D-80
635 IFT>80RTC1OR Z>80RZ<1THEN 650
640 NEXT X
650 GETH$:IFA$=""THEN 650
660 IF A$="4" THEN X=-YM:YM=XM:XM=K
670 IF A$="6" THEN X=-XM:XM=YM:YM=K
680 IFA$C>"8"THEN 560
681 T=SX:Z=SY
682 GOSUB 8000
683 IF A<STHEN SX=SX+XM:SY=SY+YM
685 IF SX<1THEN 6010
700 GOTO 560
4000 IF X<1 OR Y<1     THEN 500
4010 A=0:GOSUB9900
4012 IFR(4)=1OR R(3)=1 THEN 500
4020 A=P:GOSUB 9900:IFR(1)=1 OR R(2)=1 THEN 500
4060 IF X=8 THEN4200
4070 R=R+8:M(X-1,Y)=M(X-1,Y)+2:GOTO500
4200 R=R+1:M(X,Y-1)=M(X,Y-1)+4:GOTO500
5000 PRINT"□□□□□□□                3-D MAZE                "
5010 PRINT"M                BY P.WESLOP"
5020 PRINT"□□□□IN THIS GAME,YOU HAVE TO FIND YOUR"
5030 PRINT"□□□□WAY OUT OF A MAZE.YOU HAVE 3 CONTROLS:"
5040 PRINT"□□□□ '8' -TO MOVE FORWARD"
5050 PRINT"□□□□ '4' -TO TURN LEFT"
5060 PRINT"□□□□ '6' -TO TURN RIGHT"
5070 PRINT"□□ TO GO BACK,MOVE LEFT TWICE AND MOVE"
5080 PRINT"□□FORWARD."
5090 PRINT "□□□□□□□□□□□GOOD  LUCK"
6000 RETURN
6010 PRINT"□□□□□□□□□□□
```

(continued from previous page)

```
330 IF C=B C=1
340 VDU19,K%,C,0,0,0
350 A$=INKEY$(A)
360 IF A$="H" A=10000:GOTO350
370 IF A$="I" GOTO 430
380 IF A$="R" D=-D
390 IF A$="N" A=3
400 IF A$="C" C=C+1
410 A=A-(A=1)-(A$="S")+(A$="F")
420 VDU19,K%,0,0,0,0
430 UNTIL FALSE
```

Multiplication

L K Fripp,
Yeovil,
Somerset.

SPECTRUM

ON OCCASIONS, accurate multiplication of large numbers is required but the floating-point arithmetic of most home computers is not capable of this. This program overcomes the problem by manipulating the numbers inside strings and will multiply numbers from two-digit length, to lengths bounded only by the capacity of the computer to store the resultant strings.

It operates on the principle of long multiplication, multiplying through A$ by one digit of B$, checking for carries and storing result in C$ — the N loop. Line 150-170 shifts the result left by adding appropriate number of zeros and adds to previous results E$ — after checking their respective lengths line 190 and 200, to decide which routine to use — lines 200-300 or 400-600. It was found quicker to use two routines to cater for unequal length addition thus obviating too many conditional statements.

It then updates E$ line 470 and moves on to multiply by next digit — the M loop.

In present form it only caters for integers but could be amended to cater for decimal point, but I find it quicker to ignore decimal point and insert it manually into the answer.

```
  1 REM FOR MULTIPLYING LARGE I
NTEGERS.
  2 REM L.FRIPP © 1982
 20 INPUT "ENTER VALUE TO BE MU
LTIPLIED",A$
 30 INPUT "ENTER VALUE OF MULTI
PLIER",B$
 35 LET A$=B$
 40 LET L=LEN A$: LET K=LEN B$
 50 LET E$="0"
 60 FOR M=0 TO K-1
 70 LET C$="": LET C=0
 80 FOR N=0 TO L-1
 90 LET Z$=STR$ (VAL A$(L-N)*VA
L B$(K-M)+C)
 100 IF LEN Z$>1 THEN LET C$=Z$(
2):C$: LET C=VAL Z$(1): GO TO 10
0
 110 LET C=0
 120 LET C$=Z$+C$
 130 NEXT N
 140 IF C>0 THEN LET C$=STR$ C+C
$
 150 LET U$=""
 160 FOR T=1 TO M: LET U$=U$+"0"
: NEXT T
 170 LET C$=C$+U$
 180 LET X=LEN C$: LET Y=LEN E$:
LET R=0
 190 IF X>Y THEN GO TO 400
 200 LET G=X-Y
 210 FOR T=Y TO 1 STEP -1
 220 LET F$=STR$ (VAL C$(T+G)+VA
L E$(T)+R)
 230 IF LEN F$(2 THEN LET R=0
 240 IF LEN F$=2 THEN LET C$(T+G
)=F$(2): LET R=1: GO TO 260
 250 LET C$(T+G)=F$
 260 NEXT T
 270 IF G=2 THEN GO TO 330
 280 LET F$=STR$ (VAL C$(1)+R)
 290 IF LEN F$(2 THEN LET C$(1)=
F$: GO TO 470
 300 LET C$(1)=F$(2)
 310 LET C$=C$+"1"+C$
 320 GO TO 470
 330 LET F$=STR$ (VAL C$(2)+R)
 340 IF LEN F$(2 THEN LET C$(2)=
F$: GO TO 470
 350 LET R=1: LET C$(2)=F$(2): G
O TO 260
 400 FOR T=Y TO 1 STEP -1
 410 LET F$=STR$ (VAL C$(T)+VAL
E$(T)+R)
 420 IF LEN F$(2 THEN LET R=0
 430 IF LEN F$=2 THEN LET C$(T)=
F$(2): LET R=1: GO TO 450
 440 LET C$(T)=F$
 450 NEXT T
 460 IF R=1 THEN LET C$="1"+C$
 470 LET E$=C$
 480 NEXT M
 490 PRINT E$
```

Displays

G B Tapp,
Maidstone,
Kent.

SPECTRUM

THIS MACHINE-CODE program allows 48K Spectrum owners to store up to three separate displays, and recall any one of them in a matter of microseconds. Not only can you store the picture but the colour as well. Each picture takes up 6.912K, so with three displays, the user RAM is about 20K.

Type in program 1, making sure that the data is identical, then Run. This Basic program will load the machine code from the data and drop RAMtop to accommodate both the displays and routine.

To store and recall the displays use:

USR 65240 To store the screen to display 1.
USR 65261 To recall display 1 and place it back on screen.
USR 65282 To store the screen to display 2.
USR 65303 To recall display 2 and place it back on screen.
USR 65324 To store the screen to display 3.
USR 65345 To recall display 3 and place it back on screen.

The machine code routine is made up of six similar parts — see the dump — each swaps memory content from one place to another very rapidly.

To see all three displays in action type in the demonstration program, it will draw three pretty pictures, store them, then display each one of them individually.

To save the machine code use:

SAVE"Name" CODE 65240,126

And to load use:

CLEAR 44500: LOAD"" CODE

```
Program 1
  10 REM 3 DISPLAY'S
  20 REM © Gary Bryan Tapp 1982
  30 REM
  40 REM For 48K ZX Spectrum
  50 REM
 100 CLEAR 44500
 110 FOR a=65240 TO 65240+125
 120 READ n
 130 POKE a,n
 140 NEXT a
 145 PRINT "Ready:"
 150 REM ++DATA++ CHECK IT!
5000 DATA 17,215,227,33,0,64,6,2
7,197,6,8,126,18,19,35,16,249,19
3,16,244,201
5010 DATA 17,0,64,33,215,227,6,2
7,197,6,8,126,18,19,35,16,249,19
3,16,244,201
5020 DATA 17,214,200,33,0,64,6,2
7,197,6,8,126,18,19,35,16,249,19
3,16,244,201
5030 DATA 17,0,64,33,214,200,6,2
7,197,6,8,126,18,19,35,16,249,19
3,16,244,201
5040 DATA 17,213,173,33,0,64,6,2
7,197,6,8,126,18,19,35,16,249,19
3,16,244,201
5050 DATA 17,0,64,33,213,173,6,2
7,197,6,8,126,18,19,35,16,249,19
3,16,244,201
```

```
Demo
  10 REM Demonstration G.B.Tapp
  20 REM Draw Display 1
  30 REM
  34 INK 2
  35 IF PEEK 65240<>17 THEN PRIN
T "Machine Code Not loaded": STO
P
  40 FOR a=1 TO 175
  50 PLOT 0,a: DRAW 255,175-2*a
  60 NEXT a
  70 FOR a=1 TO 255
  80 PLOT a,0: DRAW 255-2*a,175
  90 NEXT a
 100 LET l=USR 65240: REM Save
 Display 1
 110 CLS : OVER 0
 120 FOR a=1 TO 75 STEP 8
 130 INK RND*8
 140 CIRCLE 128,128,a
 150 NEXT a
 160 LET l=USR 65282: REM save
 Display 2
 170 CLS
 180 FOR a=1 TO 704
 190 PAPER RND*7
 195 INK RND*7
 200 PRINT "*";
 210 NEXT a
 220 LET l=USR 65324: REM Save
```

```
Display 3
230 CLS
240 REM Call up all 3 Displays
250 LET l=USR 65261: REM Dis 1
255 PAUSE 10
260 LET l=USR 65303: REM Dis 2
265 PAUSE 10
270 LET l=USR 65345: REM Dis 3
275 PAUSE 10
280 GO TO 250
```

```
Dump
Mnemonics   Comments

LD DE,NN..Address to put display
LD HL,NN..Address to get display
LD B,27...Big Loop
PUSH BC...Store B
LD B,8....Small Loop
LD A,(HL)
LD (DE),A; To swap Dis with Mem
INC DE....
INC HL....
DJNZ -5...Jump back 7 bytes
POP BC...Bring back B
DJNZ -18..Jump back 12 bytes
RET......Return to BASIC
```

Maze chase

C L Naylar,
BFPO Ships,
London.

ZX-81

IN THIS GAME a randomly-constructed maze is drawn on the screen: you — a plus sign — are placed in the bottom right-hand corner and the bug — represented by an asterisk — the bottom left. An H in the top line represents home and the initial object of the game is to get home before the bug does. After the maze is produced you have time to assess the situation and plan your route. When you are ready, press Shift, and the bug will start off and begin to find its own way home.

By using the keyboard — top line for up, bottom line for down and the left and right sides of the centre lines for left and right respectively — you must get home before the bug. If he catches you, the game ends with your score displayed at the bottom left of the maze. If you manage to get home first then your score is held, you are both reverted to your start positions and on pressing Shift you are off again — this time at a slightly higher speed. After some practice you can get through the maze about five times before the speed becomes too much and the bug eventually traps you.

An additional feature is that if you get stuck in an impossible situation then it is worth driving straight at the bug. Being aggressive like this earns you a random chance of one of two things happening — either the game stops, or if you are lucky you are reverted back to start again with your score so far intact.

As regards loading, in line 1 you need a 345-character Rem statement and then a hex loader as in figure 2. Run this program and enter the hex machine code in figure 1 either

byte by byte or a whole string of them at once — check with the addresses as you go and all should be well.

Next, Save the program before you Run it. Now overwrite line 10 with 10 Rand Usr 16851 and delete the remainder of the hex loader.

Now you may run the program, hopefully it should work, but if not, you may use the program in Figure 3 to check the machine code.

```
16514 0615
      3E80
      D7
      10FD
      3E76
      D7
      1609
      3E80
      D7
      0613
      3E00
      D7
      10FD
16536 3E80
      D7
      3E76
      D7
      0E13
      3E80
      D7
      3A3440
      E605
      C606
      47
      3E80
```

```
      16558 0D
            2809
            10FA
            3E80
            D7
            0D
            2802
            18E8
            3E80
            D7
      16624 C5
            3E76
            D7
            15
            20CA
      16580 2A0C40
            117801
            19
            222140
            3617
            111200
            19
            227B40
      16645 3615
      16601 110700
```

```
1 REM .......(345 '0's).....
10 LET X = 16514
20 LET A$ = ""
30 IF A$ = "" THEN INPUT A$
40 IF A$ = "S" THEN STOP
50 POKE X,16*CODE A$ + CODE A$(2) - 476
60 PRINT AT 0,0; X; " 2 spaces "; A$(1 TO 2)
70 LET X = X + 1
80 LET A$ = A$( 3 TO )
90 GOTO 30
```

Figure 2.

```
19
0610
3680
23
10FB
2A0C40
110B00
19
362D
010100
CDBB02
7C
FEFE
20F8
C1
210014
2B
7C
B5
20FB
2A0C40
119001
19
7E
```

```
      16668 2A2140
            3600
            111600
            06FF
            ED52
            7E
            FE2D
            2003
            3697
            C9
            FE15
            2003
            3608
            C9
            FE80
            201D
            19
```

```
FE80
2002
3E9C
3C
FEA6
2005
369C
2B
18EF
77
AF
0E01
1804
0EFF
0EFF
7E
222140
3617
2A7B40
      16734 3600
            C5
            CDBB02
            7D
            2F
            6F
            E681
            2805
```

```
09
7E
FE15
28F1
FE80
2012
79
FEFF
      16711 2802
            1806
            0600
            0E01
            1804
            06FF
            0EFF
            09
      16777 11FFFF
            00
            2A7B40
            19
            7E
            FE2D
            2814
            FE17
            2810
            FE80
            2803
      16798 227B40
```

```
111600
181C
7D
E618
      16755 2805
            11EAFF
            1812
            7D
            E660
            2805
            110100
            1808
            7D
            E606
            2818
            09
            222140
            00
            2A7B40
            19
            7E
            FE2D
            2814
            FE17
            2810
            FE80
            2803
            C3C440
            3E1E
            32FC40
            C38240
```

```
C1
2A7B40
3615
C3FA40
C1
160A
3695
010005
0B
78
B1
      16821 20FB
            7E
            FE95
            20F1
            362D
            15
            2802
            18EC
            2AFC40
            2B
            2B
            22FC40
      16843 2A2140
```

```
10 PRINT "ADDRESS?"
20 INPUT A
30 PRINT A; "2 SPACES";
   CHR$ INT(PEEK A/16 + 28);
   CHR$(PEEK A- INT(PEEK A/16) * 16+28)
40 LET A = A + 1
50 GOTO 20
```

Figure 3.

Code invert

Steve Brown,
Camberley,
Surrey.

ATARI

HERE IS A machine-code invert for the Atari 400 computer. This will invert the high resolution in modes 8-11. Not only all the colours are inverted, but also all levels of brightness. The program is not instant because it has to work through nearly 9K of memory. It is located in an area of free RAM and can be called with a C=USR(1536).

```
  5 REM ++++BY STEVE K BROWN
1982++++
 10 DATA 162,33,134,213,169,80,133,212,202,
160,0,177,212,73,255
 20 DATA 145,212,200,208,247,230,213,224,3,
208,238,104,96
 30 FOR T=1536 TO 1535+28
 40 READ D
 50 POKE T,D
 60 NEXT T
 70 GRAPHICS 11
 80 FOR F= 1 TO 10
 90 COLOR RND(1)*15
100 DRAWTO RND(1)1*319,RND(2)*120
110 NEXT F
120 FOR T=1 TO 1000:NEXT T
130 C=USR(1536)
140 GOTO 120
```

Rhythm band

Jason Judge,
Cheltenham,
Gloucestershire.

ZX-81

DESIGNED AS A rhythm generator for the 1K or 16K ZX-81, this uses a machine-code subroutine to put the sounds out through the Mic port.

When the program is run, the tempo has to be entered — 20 is a good start. When this has been done, the screen will be blank.

Press Fast — shifted F — and you will hear a bass drum. This will repeat itself at regular intervals. Now press shifted P, and a wood-block will be added to the bass drum. Press Newline and the tones will be deleted.

Shifted M will allow you to enter new speed and shifted . will allow you to enter a rhythm as a string. By entering graphics, keywords and "+CRH$(X)+" you have 4.72236 × 10^{21} different rhythms at your disposal.

To enter the program, first Enter and Run program A. Enter the machine data then delete lines 2-70 and enter program B. Save the program then run it. ■

```
   SCREN " "RNDB GOSUB PIX CLS
TAN B COPY  GOSUB 7RND FAST
 PEEK COPY LN "RND<% RETURN LN "
RND LPRINT " GOSUB 7K LOAD TAN
  10 FAST
  20 DIM M$(16)
  30 INPUT I
  40 GOTO 110
  50 LET B$=M$(X)
  60 IF B$="" OR B$=" " THEN RET
URN
  70 LET B=CODE B$
  80 IF CODE B$>5 THEN POKE 1651
4,CODE B$
  90 RAND USR 16525
 100 RETURN
 110 FOR X=1 TO 16
 120 IF INKEY$()"" THEN LET M$(X
)=INKEY$
 130 IF CODE INKEY$=118 THEN LET
M$(X)=""
 140 IF INKEY$="," THEN GOTO 210
 150 IF INKEY$=";" THEN GOTO 30
 160 GOSUB 850
 170 FOR T=1 TO I
 180 NEXT T
 190 NEXT X
 200 GOTO 110
 210 INPUT M$
 220 GOTO 110
```

```
  1 REM @@@@@@@@@@@@@@@@@@@@@@@@
@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@
  2 REM LINE "1" CONTAINS 39 ZE
ROS
  3 POKE 16510,0
  4 REM LINE "5" POKES LINE "1"
 TO "0"
 10 LET A$=""
 20 FOR X=16514 TO 16552
 30 IF A$="" THEN INPUT A$
 40 POKE X,16*COD.. A$+CODE A$(2
)-476
 50 LET A$=A$(3 TO )
 60 NEXT X
 70 PRINT "DELETE LINES 2-70 TH
EN TYPE IN THE SECOND HALF OF T
HE PROGRAM"


FROM ADRESS 16514:

01  00  2A  82  40  37  60  48
30  FB  C9  23  7F  80  01  28
00  ED  58  02  40  E5  D3  FF
CD  84  48  D8  FE  CD  84  40
E1  87  ED  52  38  CF  C9
```

COMPETITION CORNER

A £15 book token will be awarded to the first correct solution drawn from the competition bag. All entries must be at the *Your Computer* offices by the last working day in February. The name of the winner, the solution, and a competition report will be published in the April, 1983 issue of *Your Computer*.

If you want to set a competition for Competition Corner, remember that the simplest solution should be calculable by a short program rather than by any other form of reckoning.

ORB BOMB

BY ANTHONY ROBERTS

YOU ARE in danger of sudden death — floating in through the open window has come this Klingon para-explosive homing anti-personnel mine. It is an orb split into eight segments along three mutually-perpendicular planes meeting at the sphere's centre — so that each hemisphere can be twisted through 90° rather like a spherical Rubik cube. Each segment has a symbol in each corner, and the sphere is defused when all the corners with similar symbols lie together.

A flattened plan of the sphere is shown below: what is the minimum number of 90° twists needed to defuse the mine?

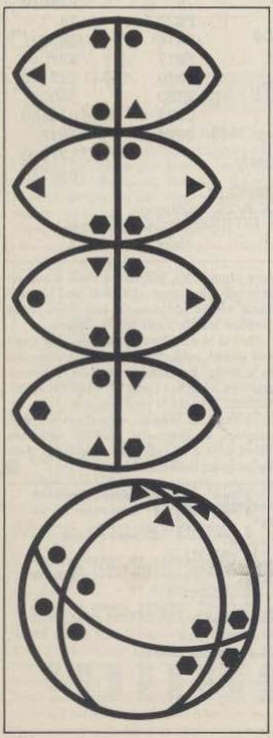

Competition results

OUR CHRISTMAS MAILBAG brought nearly 1,000 entries for the December competition which offered an Atari 400 as a prize. Obviously the Atari is the dark horse in the home computer stakes.

We asked competitors to complete the sentence "An Atari in my Christmas stocking would mean . . .". The winning entry came from Mrs D M Thomson, 55 Kent Avenue, Yate, Bristol, who suggested it would mean "a pleasant piece of hardware in my software". Another entry which indicated that the Atari has a strong appeal for lady computerniks was Mrs Allemand's "my ship had come in because all the nice girls love Atari".

Taking a strictly practical view of this yuletide possibility G Clow wrote "I would not be able to put my foot in it"; a consideration that was echoed by H Barnes' "less room for the Cray 1 I asked for". A Storey expressed the problem neatly with his "a hole in mum's micromesh tights".

The sequence of letters that gives the solution to the Xmas Box problem.



Other entries struck a topical note. S Wallis thought that an Atari in his stocking would have meant that breakfast TV started on the 25th of December and K Parker claimed "that Channel Four would lose 25 percent of its audience"; while M Trezza safely assumed that we watched the ads with "Father Christmas has short fat hairy legs".

There was not much scope for the dedicated punster although J Shaw's "many absorbing hours of explorAtari fun and games" made a valiant effort and several entries looked forward to "Atarific Christmas".

"Have a happy Xmas and New Year" was the startling solution to the Xmas Box problem. Most people found that the problem was not taxing enough to warrant a computer solution. The £15 book program goes to P Topping, 100 Longhill Road, Ovington, Brighton, Sussex, whose entry was the first one we pulled out of the bag. ■

Solution to the December Atari crossword.

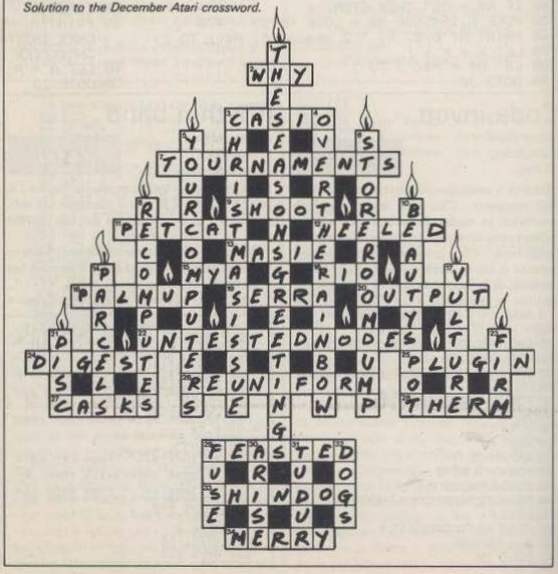

VIC-20 and Commodore 64 from Kobra

VIC 20

£129·99
inc VAT – carriage free

Still unbeatable value at this price with a full size keyboard
Backed by Adda's full one year warranty.

Features include: * 5K RAM expandable up to 29K * 8 border colours, 16 screen colours * 8 screen character colours * 3 audible tone generators, each of 3 octaves * a 'white noise' generator * 88 character program line length * 64 ASCII character set * full PET-type graphics character set generated directly from keyboard * 176 x 158 pixels (27,808 in total) maximum resolution * 8 programmable special functions accessed via 4 special function keys.

COMMODORE 64

£343·85
inc VAT – carriage free

The 64K personal computer that outpaces the rest
Backed by Adda's full one year warranty.

Features include: * 64K built in RAM * 40 column colour display – tv interface * Upper and lower case characters and graphics * Sprite graphics on eight levels * Music synthesiser with three voices and nine octave range * 16 colours available simultaneously * 8 bit parallel user port.

PRINTER

£230
inc VAT – carriage free

The VIC Printer – suitable for the Commodore 64 also – will print programs, letters, business data and graphics. It offers high specifications at a competitive price.

Features include: 80 characters per line. Tractor feed dot matrix. 30 characters per second print speed. Full alphanumerics and graphic printing. Double-size character capability. Price includes all cables. Alternative printer **GP100VC** with full-size paper feed **£270.25** inc VAT.

DISK UNIT 1541

£299·95
inc VAT – carriage free

For the VIC-20 and the Commodore 64.
A disk unit transforms your computer into a high-speed system ideal for the more serious programmer or small businessman. It enables you to get the best out of your utility programs.

Features include: 170K bytes capacity. Uses soft-sectored standard 5¼" single density floppy disks. Direct interface to computer. Direct compatibility with Printer. Prices includes all cables.

MEMORY PACKS FOR THE VIC-20
Special plug-in cartridges are available to expand VIC's memory. 3K, 8K and 16K RAM packs plug directly into computer.
16K RAM Memory Pack **£74.95,**
8K RAM Memory Pack **£44.95,**
3K RAM Memory Pack **£29.95**

KOBRA

HOW TO ORDER:

VISIT YOUR LOCAL VIC DEALER

BY MAIL OR PERSONAL CALLERS

By mail – post and packing **FREE**. Make cheques or PO's payable to Kobra Micro Marketing. Send to:

The Vic Centre
154 Victoria Road, Acton
London W3 6UL

Near North Acton tube, just off A40

BY TELEPHONE

Telephone orders 24 hrs a day with Visa, Access, Amex

01-200 0200

Two more spell-binders from

SCHIZOIDS

NEW SCHIZOIDS

for any ZX SPECTRUM.

It's my own fault, I even volunteered.
I thought that with the space-dozer and its shovel and skyhook it would be easy shifting the galaxy's rubbish. Childs play. HUH!
They warned me of the weird packaging, the trays, the rods, and all the rest.
But they didn't say I'd have to stop and control not just one but two or even more garbage pods. Then prod them, push them, toward that black hole, and oh, it's so very, very black, and so lonely, so empty.
Panic, musn't panic, but they won't stop, twirling and spinning and turning, always turning, towards me, against me, at me.
And I'm alone.
No way out, nowhere to hide, on my own, my own . . . own . . . .
SCHIZOIDS: NOT JUST A GAME, BUT A STATE OF MIND.

SCHIZOIDS features real-time animated 3d graphics for a breathtaking visual experience, plus sound and all those arcade features you'd expect from IMAGINE.
Game design and Software by Peter Paranoid and the Yid Kids. (D.H.L.)

NEW WACKY WAITERS

the wildest, zaniest way of earning a fast buck.
With crazy guests screaming for service you're gonna have to be quick to pick up the tips, don't slop the drinks, as you dodge the drunks and dart from elevator to elevator, coz if the Boss man spots you, your gonna be out on your but.
100% machine code, incredible animation, super smooth hi-res multicolour graphics, authentic sound effects and special playfield. Keyboard or joystick control.

Yet another High performance Arcade quality experience **for any Commodore Vic-20.**
Game design and software by Eugene Evans.

ARCADIA

the name of the game especially created to be the fastest, meanest, most addictive shoot 'em up game you've ever desired. Wave after wave of the most loathsome and deadly aliens billow hypnotically towards your space fighter with deadly intent. But then you have dual Plasma Disruptors and an Ion Thrust Drive haven't you?...

ZXSPECTRUM (16K or 48K)
100% machine code with 12 different alien types, incredible animation and explosive effects, sound and the fastest, smoothest hi-res graphics ever!

VIC-20 (any memory size)
100% machine code with eight different alien types, smooth hi-res multicolour graphics and animation, narrow playfield and sensational sound effects.
Keyboard or joystick.
Game design and software by D. H. Lawson.

Imagine Software, Masons Buildings, Exchange Street East, Liverpool, Merseyside L2 3PN.

Imagine

Wacky Waiters

Any of these games for just

£5.50 EACH

Including first class post, packing, VAT and an **UNCONDITIONAL LIFETIME GUARANTEE**

When you buy Imagine Software you buy it for life. If an Imagine Software product EVER fails to load first time simply return it to Imagine for an instant free replacement.

All orders despatched by first class post within 24 hours of receipt.

Why not put a first class stamp on your envelope and you will receive your order within 3 days of posting.

Available from all good software outlets

Post coupon now to **Imagine Software, Masons Buildings, Exchange Street East, Liverpool, Merseyside L2 3PN.**

Please rush me copies of (tick box)

☐ **Arcadia** ☐ **Schizoids** (for any ZX Spectrum)

☐ **Arcadia** ☐ **Wacky Waiters** (for any Commodore VIC-20)

Please debit my Access/Barclaycard (delete as necessary)

Card Number ☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐

I enclose Cheque/PO for £ _____

Name _____

Address _____

YC2

dealership enquiries contact: Mark Butler

Access

SUPERFAST CREDIT CARD SALES LINE: 051 236 6849 (24hrs)

BARCLAYCARD VISA

ORIC-1
ORIC-1™
TIMELESS TECHNOLOGY FROM ORIC PRODUCTS INTERNATIONAL

The Computer Challenge

16 colours professional keyboard full graphics real sound

FREE FORTH with every 48K model.

- Superb styling
- Choice of 16K RAM or massive 48K RAM
- Ergonomic keyboard with 57 moving keys
- 28 rows x 40 characters high resolution
- Teletext/viewdata compatable graphics
- 6 octaves of real sound plus Hi-Fi output
- Centronics printer interface and cassette port
- Comprehensive user manual

THE REAL COMPUTER SYSTEM FOR £99.95 incl VAT

OPTIONAL MODEM OFFERS COMPUTER PHONE LINK FOR:
● ELECTRONIC MAIL ● TELESOFTWARE ● PRESTEL

COMING SOON, TO COMPLETE YOUR SYSTEM: ORIC MICRO-DRIVE DISCS & SPEED PRINTER

FOR HOME: The ORIC-1 is the professional alternative for home computing. Superbly styled, the 57 key layout is based upon computers costing many times more than the ORIC, and will help the whole family to learn and understand computing, right from day one. The ORIC incorporates an improved version of Basic for ease of programming and use. For the enthusiasts the computer has laser zaps, explosions, etc. pre-programmed for games use, with Hi-Fi output for incredible effect. The communications Modem will allow 'Telesoftware', message sending, and Prestel use.

FOR BUSINESS: The ORIC-1 is the answer to many day to day problems. Software is becoming available for payroll, accounts, stock-control, and many more systems to help your day to day business organising and control. In addition, the ORIC COMMUNICATIONS MODEM will allow you to access up to 200,000 pages of Prestel information, to send and receive 'electronic mail', to book hotels, and flights (and pay for them) and to look at the latest stock-market and share indexes.

In short the ORIC-1 is a must for all businesses large or small.

HOW TO ORDER YOUR ORIC-1: By phone: Just ring our telesales number Ascot (0990) 27641.

By post: You can pay by cheque, postal order ACCESS – BARCLAYCARD – AMEX – DINERS. (Please allow 28 days for delivery).

Money back if not satisfied.

© Copyright ORIC PRODUCTS INTERNATIONAL 1982

ORIC-1
The Real Computer System

ORIC PRODUCTS INTERNATIONAL LTD Cowcroft Park Manager, Cowcroft Park, London Road, Sunningdale, Ascot, Berks SL5 7QE

Item	Qty	Price Inc VAT
ORIC-1 16K RAM		£ 99.95
ORIC-1 48K RAM		£169.95
ORIC Communications Modem		£ 79.95
Postage and Packing		
Please charge my Access, Barclaycard Amex, Diners Club account no.		Total
		TOTAL £

Name
Address

*Please delete/complete as applicable.
*I enclose a cheque/P.O. payable to: ORIC PRODUCTS INTERNATIONAL LIMITED for £

If you require a brochure please tick ☐

YC2

FROM DIFFICULT TO

...MORE CHARTBUSTERS FRO

SUICIDAL
M BUG-BYTE!

Though no official charts exist as yet, a quick look through the popular Micro Press will show you which software is way out in front – Bug Byte!

So say tens of thousands of satisfied customers who continue to make action packed games like Mazogs, Spectral Invaders, Vic Panic, Cosmiads, Another Vic in the Wall and many many more, massive best sellers as do consistently hot reviews in the popular Micro Press.

Why?

Because Bug Byte software is good – very good. Our talented young team of programmers have 3 years professional experience of bringing out the very best in whichever machine you're using. Utilising all its capabilities to the full and all your capabilities to the full, with fabulous graphics and incredibly realistic sound effects.

A dazzling array of Bug Byte software is currently available for ZX 81, ZX Spectrum Vic 20 (expanded and unexpanded), BBC Micro (A and B models) and Atom, and more are becoming available almost daily.

You can buy through our nationwide network of authorised dealers including Laskys, W. H. Smiths, Currys Micro C, Spectrum and larger branches of Boots. Look for the Bug Byte sign and be sure you're buying the best.

BUG-BYTE SOFTWARE

100, THE ALBANY, OLD HALL STREET, LIVERPOOL L3 9EP.

YC.2.83

PROGRAMPOWERMICROPOWER

GREAT BBC PROGRAMS FROM BRITAIN'S LEADING SOFTWARE HOUSE

SWOOP

SWOOP

ALIEN DESTROYERS

CHESS

SWOOP (B) £6.95—the NEW GALAXIANS IT'S HERE AT LAST!! Galaxian-style, machine code arcade game. THIRTY screaming, homing, bomb-dropping, explosive egg-laying BIRDMEN, swooping down in ones and two's to destroy your laser bases. The exploding eggs feature makes a normally difficult game into a challenge 'par excellence.' Each new screen means increased difficulty. Bonus bases, score display, high-score and rankings are, of course included. YOUR WAITING IS OVER!!

ALIEN DESTROYERS (B) £6.95
Sensational, high speed 'INVADERS' program with an abundance of features. Brilliant use of sound and graphics. 48 strong Alien Fleet of three different types plus Mothership scoring mystery bonus. Choice of six alien speeds and three bomb speeds. Vertical, angled and exploding missiles. Options to replace defences and suppress new fleet advances. Bonus bases awarded each new sheet. Scoring according to overall difficulty level. Ongoing display of score and hi-score. End of game rankings of top five scores.

This program has many unique extras e.g. 'battle analysis' showing the number of each alien type shot down, how many motherships destroyed, the number of sheets cleared, the shots fired, the percentage of hits made and the number of bases lost.

CHESS (B) £6.95
Our excellent machine code program—now with superb MODE 1, colour graphics. Six skill levels, play black or white, illegal moves rejected, 'en passant', castling, take-back of moves, and display of player's cumulative move-time. Options include Blitz Chess where you must move in 10 seconds, set-up of positions for analysis, replay of a game just played and saving of part completed games on tape. On loading, a 1972 Spassky/Fischer game can be replayed.
NOTE: Model A Version still available at only £4.95. If you wish to upgrade your Model A version please return your tape, together with £2.50 plus V.A.T. (Special Offer does not apply for Model A upgrade)

Other B.B.C. programs available:
Galactic Commander (B) £6.95/
Laser Command (B) £6.95/
Adventure £6.95/
Cowboy Shoot-Out (B) £5.95/
Filer £8.95/Micro Budget £6.95/
World Geography (B) £5.95.
Timetrek (B) £5.95/Spacemaze (B) £5.95/Martians (B) £5.95/Astro Navigator (B) £4.95/Star Trek £4.95/Maze Invaders (B) £4.95/Footer (B) £6.95/Munchyman £5.95/Seek £5.95/Eldorado Gold (B) £5.95/Cat & Mouse £4.95/Mastermind £3.95/Reversi 1 £4.95/Reversi 2 (B) £4.95/Roulette (B) £4.95/Gomoku £3.95/Zombies £3.95/Dissassembler £5.95/Constellation (B) £5.95/Where? (B) £5.95/Junior Maths Pack (B) £5.95.

WE Guarantee THAT ALL OUR ADVERTISED PROGRAMS HAVE BEEN COMPLETED AND ARE READILY AVAILABLE

WRITTEN ANY PROGRAMS? WE PAY 20% ROYALTIES FOR DRAGON, SPECTRUM BBC ATOM PROGRAMS.

WE ARE AUTHORISED DEALERS FOR ACORN ATOM, BBC MICRO & DRAGON 32

SPECIAL OFFER
Deduct £1 per cassette when ordering two or more.

MICRO POWER LTD.
Dept. YC2
8/8a REGENT STREET,
CHAPEL ALLERTON,
LEEDS LS7 4PE
Tel: (0532) 683186

Please add 55p order P.&.P. + VAT at 15%

VISA

Please Note:
All programs are now available at all good dealers or direct from MICRO POWER LTD.

PROGRAMPOWERMICROPOWER

YOUR COMPUTER BACK ISSUES

Just getting started in computing? Or perhaps you're already pretty knowledgeable and would like to extend your programming skills. Either way Your Computer back issues can help to fill your need for reliable and, above all, relevant information about home computing.

Every issue contains reviews of new computers, software evaluations, and surveys of add-on equipment together with informative articles which tell you how to get to grips with graphics, sound and machine code programming.

Facilities provided on the Sinclair ZX81 and Spectrum, Vic 20, Acorn Atom and BBC micro have been examined in article after article, providing a comprehensive introduction to all the most popular home computers. Just run your eye down the Contents of our back issues and you'll see what we mean.

To order back issues complete the coupon at the foot of this page and send it with your remittance to the address shown on the coupon.

January 1982
Reviews: BBC micro; Wordprocessing on Atom; Morphy v. Champion (chess computers). Game — Treasure House. Education — ZX81 programs for school use. Vic-20 Software. ZX81 Graphics. A-D conversion. Interview — Kenneth Baker.

February 1982
Survey: ZX Software. BBC Graphics. ZX81 Animated Graphics. Vic 20 M[illegible] How [illegible]es. Atom Pr[illegible] on Z[illegible]erry Borland.

SOLD OUT

April 1982
Survey: ZX Ports. Sorting on ZX-81. BBC Graphics. How to write an Adventure Game. Atom line labelling. Game — Nim for ZX81 and Apple II. Interview — John Baxter.

May 1982
Survey: ZX Software. How to write a chess program. Games — Vic 20 Tank Battle; Magic Squares. How to show off your ZX81. Joysticks for the ZX81. BBC Graphics. How to write a word processing package. Interview — Richard Turner.

June 1982
Reviews: Sinclair Spectrum; Vic 20 Software; ZX-81 Keyboards. Games Vic 20 Mars; Othello on Flexidisc. Atom Utilities. ZX81 machine code monitor. How to build a portable computer. Interview — Ron Bissell.

July 1982
Survey: Atom Software. Spectrum Graphics. ZX-81 Colour Board. Games — Dog Race; Genie Guessing Game; Simon Challenge. BBC Sound. ZX-81 Dis-assembler. Programs for ZX-80. Interview — Richard Altwasser.

August 1982
Review: Dragon 32. Survey: Vic memory expansion. Spectrum Sound Games — Demon's Domain; Vic Duck Shoot. ZX-81 machine code (Part 1). Atom file handling. Ecological modelling. BBC techniques. Interview — Tony Baden.

September 1982
Review: NewBrain. Spectrum Software. Sound on ZX-81. Games — Vic Dambuster; B-52 Bomb Run. Vic-20 Assembler. Spectrum Disassembler. ZX-81 Indexer. ZX-81 machine code (Part 2). Midwich MC control computer. Interview — Hermann Hauser.

October 1982
Reviews: Sanyo PHC range; MPF-II; Commodore 64; Colour Genie. Survey: BBC Software. Atom Forth. Pascal for Basic users. ZX word processing. Games — ZX-81 Pinball; Vic Catacombs. Atom text. BBC control Key. Spectrum Assembler. ZX-81 machine code (Part 3). Interview — Douglas Adams.

To obtain any of these back issues please complete and return the coupon printed below. Prices per copy including post and packing are: United Kingdom: £1.50. Europe: £2.00. Rest of world: £2.50 (by Air Mail)

Issue (month)	Year	Quantity required

To: General Sales Dept., Room 108, IPC Business Press Ltd., Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS.

Please send me the back issues detailed left – for which I enclose cheque/PO for £ ..... payable to IPC Business Press.

Name .....

Address .....

.....

ZX SPECTRUM & ZX81 EDUCATIONAL SOFTWARE

Spectrum Junior Education **£5.50**

Use your Spectrum to help your children with their school work. This cassette contains eight attractive, easy-to-use programs for the 7 to 11 age group.

Topics include English comprehension, spellings, homophones, junior science, maths and history.

* Entering your own questions and answers allows you to adapt two of these programs for exercises in any subject area.
* Moving colour graphics and sound are extensively used to improve motivation.
* Use the "draw" program to produce pictures, maps and diagrams.

Suitable for the 16K or 48K Spectrum. Program notes are supplied.

O-Level Chemistry (C1) **£5.50**

This cassette contains four clearly presented revision/tutorial programs. The subject matter has been carefully structured to cover the most important aspects of:

* Elements, compounds and mixtures.
* Structure, bonding and properties.
* Redox, electrolysis and the activity series.
* Acids, bases and salts.

48K Spectrum and 16K ZX81 versions of the cassette are available. Please specify which you require.

Professional Computer Assisted Learning materials from:

CALPAC COMPUTER SOFTWARE
108 Hermitage Woods Crescent, St Johns, Woking, Surrey GU21 1UF.

Overseas orders: £6.50 ($11.60) per cassette; includes AIRMAIL postage.

THE ADVENTURE GAME THAT'S FOR REAL !!!!

£6,000 PRIZE! FREE HIT SINGLE! 48K ZX SPECTRUM
(16K ZX81 VERSION NOW AVAILABLE)

Will you be the first to locate the Golden Sundial of Pi in time and space, and be rewarded with the original? Exquisitely crafted by the winner of the De Beers Diamond International Award, from gold, diamond and the most precious of the earth's riches.

PIMANIA – where saxophones turn into hangfeders, where music meets madness and where the Pi Man rules supreme! He'll talk with you, he'll befriend you, he'll betray you, he'll even do the Hokey-Kokey! Animated cartoon graphics! Full musical score! Spectacular colour and sound effects! Includes free hit single "Pimania", with vocals by Clair Sinclive and the Pi-Men!

It could take you a week to play, it could take you a lifetime! PIMANIA, "the best evidence that computer gaming has come of age . . . an adventure enthusiast's dream!" (Computer & Video Games)

An investment at £10 (48K Spectrum) £8 (16K ZX81)

Automata Ltd. (YC)
65a Osborne Road
Portsmouth PO5 3LR
England

GEMINI SOFTWARE

ZX81 (16K) SPECTRUM (48K) STARTREK

Features an 8 × 8 Galaxy, Klingons and Starbases, short and long range scans, Torpedoes and Phasers, Computer etc.
PLUS Normal or Hyperdrive: choose your speed but watch the energy level.
Galaxy Map: keep track of where you have been. Also, shows whether any Klingons remain there, and where the starbases are.
Visual display of Enterprise's position and movement.
Visual display of photon torpedo.
Messages from crew members.
5 levels of play. And much more.

Cassette plus full instructions.

ZX81 £4.95
Spectrum £5.95 (colour and sound too)
Sae for other programs.

Gemini Software

36 BADMINTON RD, LEICESTER LE4 7RQ.
TEL: (0533) 64915

BRITAIN'S LARGEST SINGLE MICRO USER GROUP

BEEBUG FOR THE BBC MICRO

INDEPENDENT NATIONAL USER GROUP FOR THE BBC MICRO

MEMBERSHIP NOW EXCEEDS 10,000

BEEBUG runs a regular magazine devoted exclusively to the BBC Micro (10 issues per year). Now 36 pages.
First issue April 1982. Reprints of all issues available to members.
Programs – Hints and Tips – Major articles – News – Reviews – Commentary.
PLUS members' discount scheme PLUS members' software library.

April Issue: 3D Noughts and Crosses, Moon Lander, Ellipse and 3D Surface. Plus articles on Upgrading to Model B, Making Sounds, and Operating System Calls.
May Issue: Careers, Bomber, Chords, Spiral and more.
Plus articles on Graphics, Writing Games Programs, and Using the Assembler.
June Issue: Mazetrap, Mini Word Processor, Polygon; plus articles on Upgrading, The User Port, TV set and Monitor Review, Graphics Part II, More Assembler Hints, Structuring in BBC Basic, plus BBC Bugs.
July Issue (36 pages) Invaders and patchwork programs. Fix for BBC cassette Bugs, Mode 7 explored, User define Keys, Software reviews, High res graphics printout, RS423 receive fix.
September Issue: Games programs! Higher/Lower, Hangman, plus string search program. Articles on debugging programs, a Safe Verifier, new User guide, errata, creating and moving multicolour characters, logic and the Beeb, ideas on colouring and shading, Acorn's ROM replacement charge plus much more.
October Issue. Program features: alien attack, calendar generator, Union Jack, memory display utility. Articles on debugging, improving key detection, Acorn press release on O.S.1.2. issue II Basic, the tube and second processor options, a new series for less experienced users, software reviews.

Membership
6 months £4.90, 1 year £8.90
Send £1.00 and A4 SAE for sample
Overseas 1 year only:
Europe £15.00, Middle East £18.00
Americas & Africa £20.00.
Other countries £22.00.

Make cheques to BEEBUG and send to
BEEBUG, Dept 4, 374 Wandsworth Rd., London, SW8 4TE.

IMPACT SOFTWEAR

From Scotland's Capital comes quality software for the

ZX Spectrum, VIC 20 & now also Dragon 32

The Quest

(48K – Spectrum; Dragon 32)
(One of the most exciting adventure games currently available). Fight your way into the depths of the complex in your Quest for the Holy Grail. Discover Gold and Precious stones, buy weapons and Magic wares from a trader. Battle with one of the many Monsters. Up to 1500 locations may be searched in the course of a game. Full sound effects and save game facility. – Only £5.00

Star Trek

(16K – Spectrum; 8K – VIC 20; Dragon 32)
Save the Galaxy from the Klingons using your rapid-fire phasers and photon torpedos. Automatic short-range scan, Galaxy map and Star-bases.
Full sound effects and 10 levels of difficulty! Only £5.00

Orb

(48K – Spectrum; 16K – VIC 20; Dragon 32)
Make your way through the underground labarynth in your search for the dreaded Orb, which you must destroy. Encounter many Monsters, discover Treasure and try to remember your route so that you can get out again. Full sound effects and save game facility. – Only £5.00

NEW! 3-D Maze

(48K – Spectrum; Dragon 32)
Exciting 3-Dimensional Maze Game! Search for the 3 fabulous treasures, then make your way back to the exit. Time yourself with the On Screen Clock. But Beware – the treasures are not always in the same locations.
Only £5.00

Star fighter

(16K – Spectrum)
All action, full-colour, graphic machine-code, Space-battle with devastating explosions. On screen scoring and high score kept. The longer you survive the more difficult it becomes. – Only £5.00

Games Pack (Unexpanded VIC 20)
Alien * Road Race *
The Island * Pontoon *
Only £5.00

Dealers – Attractive Discounts
Spectrum & VIC 20 programmes wanted – 25% Royalties Paid.

ALL ORDERS DESPATCHED BY RETURN

I enclose a Cheque/PO for £ _____
Name _____
Address _____
_____ Post Code _____
All prices **include** P&P and VAT

IMPACT SOFTWARE
70, Redford Avenue,
EDINBURGH EH13 0BW
TEL: 031-441-4257

Please Supply
The Quest (£5.00) ☐ 3-D Maze (£5.00) ☐
Orb (£5.00) ☐ Starfighter (£5.00) ☐
Star Trek (£5.00) ☐ Games Pack (£5.00) ☐
Please state machine type _____

ENTER THE SUPER JRS ZX SOFTWARE COMPETITION AND

WIN £250 PLUS

A 14" COLOUR TV

Your original ZX81 or SPECTRUM program could win the first prize of £250 and a 14" colour T.V., the second prize of £150, or one of the three third prizes of a JRS 64K RAM Pack.

PLUS

a substantial cash payment for the distribution rights to your game by JRS (even if you don't win a prize. JRS may still offer to buy your program, providing it meets with the high standards required). All entries must be received by February 28th. Winners will be notified by post by March 31st, and results will be published in the May issues of *Sinclair User* and *Your Computers*.

All programs submitted must be accompanied by an official entry form, available from JRS Software, which contains full details of the rules and conditions of the competition.

Fill in the coupon below and post it today for your official entry form, including a large stamped addressed envelope.

Please rush me by earliest post:
☐ Competition Entry Form ☐ New 1983 Catalogue
* Tick as appropriate

Name .....
Address .....
..... Age .....

JRS SOFTWARE
19 WAYSIDE AVENUE, WORTHING, SUSSEX. BN13 3JU Telephone: (0903) 65591

NEW

From Warp Factor Eight

Lift-off into '83 with HI-STAK

- makes your computing easier, faster, more reliable, less exhausting and simply more enjoyable.
- angles your computer neatly to the correct ergonomic position for the most efficient keyboard operation.
- provides extra ventilation for hot ZX81's and Spectrums.
- instantly applied.
- styled for '83, adds that professional look to your set up.
- precision injection moulded in quality ABS, non scratch – non slip base.

ZX81
SPECTRUM
VIC20
TRS80
NEW BRAIN
JUPITER ACE
Etc.

Order form. Please send me ____ HI-STAK set(s) (at £3.95 per set). I enclose cheque/P.O. for _____

Name _____
Address _____
_____
_____ Post code _____

To: Warp Factor Eight, Dept. YC.
6 Pelham Road, Braughing, Ware, Herts. SG11 2QU.

WORLD'S SMALLEST COMPUTER SYSTEM?

Breast Pocket Computer — A5 Book Size System
More powerful than pocket computers costing up to twice as much.

Sharp PC-1251 Computer **£79.95**
Plus FREE £10 software voucher

CE-125 Printer/ Micro Cassette **£99.95**
Plus FREE £10 software voucher

Custom made for Sales Executives. Ideal for Engineers and Hobbyists, or as a starter computer that grows into a powerful, reliable system.

PC-1251. Massive memory:— 4.2K RAM (3.7K user) and 24K ROM for extended BASIC, including DIM, STRING and INKEY$. Up to 18 programs stored in memory at once, each with its own execute key, plus reserve mode for frequently used commands. One-touch mode selector for Reserve/Program/Run. Full range of math and science functions. QWERTY keyboard. 24 digit dot matrix display. Auto power-off, with memory protection.

CE-125. Half the size of this page and less than 1 inch thick!

24 character thermal printing of data, computation results, programs, etc. Integral micro cassette recorder for error-free saving/loading, **plus built-in interface for standard cassette recorder.** Will run existing PC-1211 software but many times faster! Powered by rechargeable NiCad batteries, or mains adaptor (supplied).

MICROL AND SHARP SOFTWARE AVAILABLE SOON
SEND FOR DETAILS

System Price £179.90
Including VAT and FREE £20 software voucher

Dimensions
PC-1251: 135 × 70 × 9.5mm /5-5/16 × 2¾ × 3/8 inch). Weight: 115G (4oz).
CE-125: 205 × 149 × 23mm (8-1/16 × 57/8 × 29/32 inch). Weight: 550g (1.2lb).

SHARP PC-1500 COLOUR COMPUTER

The world's most powerful pocket computer?

PRICES, including VAT and FREE software voucher

PC-1500 Pocket Computer plus £20 software voucher	£169.95
CE-150 Colour Printer/Cassette interface plus £20 voucher	£149.95
CE-155 8K RAM Expansion Module plus £10 voucher	£79.95
CE-159 8K RAM/ROM with battery back up + £10 voucher	£89.95
CE-152 Custom Cassette Recorder plus £5 voucher	£39.95
CE-153 140 key Software Board plus £10 voucher	£79.95
CE-158 RS-232C Interface plus £20 voucher	£149.95

SOFTWARE ACCESSORY LIST ON REQUEST

PRICES include VAT, P&P. Offers are subject to availability. Send Cheques, P.O., or phone your credit card no. to:

MICROL MAIL ORDER

Dept YC, 38 Burleigh St
Cambridge CB1 1DG
Telephone: 0223 312453

ZX81 SPECTRUM DRAGON TANDY BBC

16K 16/48 32 LEVEL 2 A/B

ADVENTURE

* Over 200 places to explore in this machine code game using advanced data compression techniques.
* No random elements — you will need skill, cunning and a sense of humour as you explore caves, forest and castles.
* Evade ruthless pursuers and overcome a host of obstacles.
* Multiple word commands and single letter abbreviations.

AWARI

* The ancient African game of logic. It takes 2 minutes to learn the rules but far longer to master the tactics.
* Select the 'Goat-herd' level of play and it's an addictive game for children (8+) that exercises their minds — not their laser fingers.
* Select the 'Witch-doctor' level and it's a threat to your sanity. We haven't beaten it and we wrote it!

£1000 IN PRIZES

FANTASTIC VOYAGE (ZX81 16K ONLY)

This real-time graphics simulation set inside the human body was written by a lecturer in anatomy. You are injected into the blood stream in your miniature submarine. Navigate the arteries, veins and heart to the brain, where a blood clot must be destroyed. Features a real vasular map. You will be attacked by lymphocytes which must be destroyed using arcade game type graphics. Everything you do uses up precious energy. Three display formats — a lateral and frontal body scan plus blood vessel name, a close-up scan and a laser-sight for fighting lymphocytes.

** Buy both Awari and Adventure and enter the 'Foilkade Challenge' competition. Details with cassette or send SAE.

FOILKADE LTD

DEPT. PR9
66 LITTLEDEAN,
YATE,
BRISTOL BS17 4UQ

ALL GAMES £5.95 EACH, 2 FOR £9.95, 3 FOR £13.95 (ANY MIX) INCLUSIVE.

THE FLEXIBLE COMPUTER SYSTEM FOR THE FUTURE

ORIC-1

CREATED BY TANGERINE

How can Tangerine promise you a professional computer for only £99.95? Because, unlike most computer builders, we have designed the U.L.A. ourselves.

This makes the ORIC-1 substantially more reliable and versatile to work with and what's more, at £99.95, you get a professional system well below the price of all leading manufacturers.

We can give you prompt service, quality, reliability and full technical backup. The ORIC Computer System will guarantee you that and more:

- 8 colour graphic display (8 foreground + 8 background)
- 40 character by 28 line colour text display
- High resolution graphics (240/200 pixels) 240 across screen, 200 down
- 96 User defined graphics symbols
- Microsoft BASIC software
- 6 octaves of music with Hi-Fi output and 4 preset sound effects – Shoot, Explode, Ping, Zap
- Centronics printer interface (compatible with a whole range of standard printers)
- Optional Communications Modem (allowing access to 200,000 pages of Prestel and direct link with other computers)
- Typewriter style keyboard
- Professionally written user manual by well-known computer authors
- Oric Owner Magazine included with each ORIC 1 purchased
- Tan-Forth supplied free with every mail order 48K Model
- Extended Basic (BBC etc) available soon
- Full range of business and leisure software coming shortly.

(Please allow 28 days for delivery) **Subject to availability**

Order your ORIC-1 direct from the designers

BY POST: You can pay by cheque, postal order, ACCESS – BARCLAYCARD-VISA

BY PHONE: Just ring our telesales number ELY (0353) 2271/2/3/4

Please delete/complete as applicable.
*I enclose a cheque/p.o. payable to TANGERINE COMPUTER SYSTEMS LTD. For £
Please charge my Access, Barclaycard, Visa No.

Name
Address

Item	Qty	Price Inc. VAT	Total
ORIC-1 16K RAM		£99.95	
ORIC-1 48K RAM		£169.95	
ORIC Communications Modem		£79.00	
ORIC Owner Magazine (Bi-monthly)		£10.00	
Postage and packing		£5.95	
		TOTAL £	

If you require a VAT receipt please tick ☐

Please send me a full colour brochure ☐

TANGERINE COMPUTER SYSTEMS LTD. 3 Club Mews, Ely Cambs CB7 4NW

NOW in Birmingham – the centre of industrial Britain . . .

THE Midland Computer Fair

Personal computers
Home computing
Small business systems

Bingley Hall, Birmingham.
April 28-30, 1983

Sponsored by Practical Computing and YOUR COMPUTER

This exhibition is the ideal showcase for companies who need to demonstrate their products to the fast expanding market for home and personal computers, small business systems and associated software. When you consider that the markets for personal computers are regional and that Birmingham has a developing computer awareness with a great deal of computer expertise in the area, you'll appreciate the need for The Midland Computer Fair. The public has already demonstrated its appreciation of The Computer Fair in London by sheer volume of numbers. We know the success will continue in Birmingham.

Personal computers are part of everyday life.

Make Sure Your Computer Products And Services Are Seen At The Midland Computer Fair.

For the full story contact the Exhibitions Manager, The Midland Computer Fair, IPC Exhibitions Ltd, Surrey House, 1 Throwley Way, Sutton, Surrey SM1 4QQ.

Please contact me with further information about exhibiting at The Midland Computer Fair.

Name _____

Position in Company _____

Company _____

Address _____ Tel _____

THE Midland Computer Fair

CONVERT YOUR ZX....

FULLER MICRO SYSTEMS ADD STYLE, POWER, VERSATILITY AND FULL TYPEWRITER KEYBOARD OPERATION TO ZX81 AND ZX SPECTRUM!

FULLER FD42 SYSTEM – The ideal Gift for ZX81 users!

The ZX81 is easily Britain's best selling small computer, and now costs an incredibly low £49.95. To celebrate this event, we are offering our equally popular FD42 system at an even lower price than before! It converts your ZX81 into a sturdy, attractive and professional unit, with full sized typewriter keyboard. **NOW ONLY £29.95** (plus £2.50 p & p)

ITS EVEN CHEAPER IN KIT FORM!

FD42 Keyboard and Case Kit _____ **JUST £24.95** (plus £2.50

FD42 Keyboard Kit _____ **JUST £14.95** (plus 80p p & p)

OR WHY NOT BUY A COMPLETE SYSTEM!

If you are not lucky enough to already own a ZX81, an FD42 System, including computer, from us, and make an even bigger saving! ZX81, FD42 Keyboard and Case with power supply, reset switch, leads and manual – True Value £79.95.

SPECIAL OFFER £69.95 (plus £2.50 p & p)

FULLER MEMORY EXPANSION – a massive boost for your ZX81!

The basic ZX81 has only 1K of RAM – now you can add on an enormous 16K with our FD 16K Memory Module. FD 16K to mount on the back of ZX81 or Fuller Case.

_____ **£24.95** (plus 80p p & p)

FD 16K to fit inside Fuller Case, complete with RAM adaptor board. _____ **£29.95** (plus 80p p & p)

FD 64K to fit inside case (incl RAM adaptor board) **£69.95**

FD 64K to mount on back of ZX81 or FULLER CASE **£64.95**

FULLER FD SYSTEM for ZX SPECTRUM

Now, the famous FULLER keyboard and case unit has been adapted for Britain's fastest selling colour computer – the amazing ZX Spectrum! it has the same high standard as the ZX81 unit, a tough plastic case encloses the keyboard, Spectrum P.C.B. and power supply. The Keyboard has 42 keys including all the Spectrum graphic characters printed on to them, the full travel key switches have gold plated contacts and guaranteed life of 10^6 operations.

IT'S SO EASY TO INSTALL! You simply unscrew the ZX P.C.B. from its case, screw it to the FD case, and plug in the keyboard. No soldering or technical knowledge required.

COMPLETE UNIT _____ **£39.95** (plus £2.50 p & p)

KIT FORM _____ **£33.95** (plus £2.50 p & p)

FULLER SOUND EXPANSION – a superb addition to your ZX Spectrum!

Clear, dynamic sound effects will really enhance your enjoyment of the new, exciting programs available for the sensational ZX Spectrum. Our new sound box comes complete with leads, volume control and loudspeaker. Just plug it into your MIC input, and it fits neatly onto the back of the Spectrum in a tough, plastic case.

_____ **JUST £6.95** (plus 80p p & p)

NEW! Programmable Sound Generator – adds exciting new sounds to the Spectrum range.

ONLY £19.95 (plus 80p p & p)

STOP PRESS! 16K Spectrum owners – upgrade to 48K with a Fuller Spectrum Upgrade Pack – complete with full assembly instructions. **£34.95** (Inc p & p)

FULLER ZX Spectrum Software

So little software is available for the Spectrum, you could count on Fuller to be one of the first! Startrek, Flight Simulation and Death Star, all in attractively packaged cassette form.

_____ **£5.00** (plus 50p p & p)

SPECTRUM MOTHERBOARD

Fits inside the Fuller case, allowing expansion to the ZX memory and 1/0 facilities.

2 SLOTS _____ **£15.95** (plus 80p p & p)

3 SLOTS _____ **£19.95** (plus 80p p & p)

SEPARATE SPECTRUM P.S.U.

9 volts DC at 2 amps.
Mains either 110v or 240v A.C. _____ **£5.95** (plus 80p p & p)

Fuller MICRO SYSTEMS

Mail to: **FULLER MICRO SYSTEMS,**
The ZX Centre, Sweeting Street, Liverpool 2.
Telephone: 051-236 6109

Please supply the following items:

ITEM	QUANTITY	PRICE	POSTAGE	TOTAL

I enclose cheque/p.o. ☐
Or, please debit my Access/Barclaycard No. _____

Name _____

Address _____

_____

Please send me further details, I enclose S.A.E. ☐

.2.83

NEW SHAPE COMMAND

ACORN ATOM

NEW 4K EPROM PLUGS STRAIGHT
INTO UTILITY SOCKET FLASHING CURSOR
1200,600,300 BAUD CASSETTE OPERATING SYSTEM.
VISIBLE AND AUDIBLE INDICATION OF LOAD & SAVE.

Draw complex graphic shapes with one instruction using our special 'SHAPE' command

33 NEW COMMANDS

SHAPE N X,Y	– draw shape number N at X,Y
BLOCK	– draw block of any size, any graphic mode
POINT	– test if graphic point set or clear
FIND	– print lines which contain a given string
KEY	– scans keyboard for use in real time games
ZERO	– zero all basic variables
SCREEN	– set cursor to screen location (0 to 511)
STOP	– debugging program command
STRG	– print strings in graphic modes
MC	– monitor – memory change, Hex & textdump
RENUMBER	– including GOTOs and GOSUBs
AUTO	– automatic line numbering
DELETE	– delete block of program lines
VERIFY	– verify programs after recording on tape
PACK	– removes non significant spaces
TONE	– sound a note of any duration and tone

PLUS: READ,DATA,RESTORE,BSAVE,APPEND,TAPE... BSTRG, CHAR, POP, VAR & BLEEP

Fits any size memory Atom

Full Documentation included

NEW LOW PRICE £15.95 ALL INCLUSIVE

Ross Software

RUSH YOUR ORDER TO: Ross Software
44 Premier Avenue, Grays, Essex RM16 2SD
Send £1 for documentation only

Simonsoft

Specialists in high quality software of the

BBC Microcomputer Disassembler (Model A and B)

Reveal the secrets of the BBC Microcomputer and those machine-code games with this full 6502 Disassembler. Ideal for the beginner and indispensable to the serious machine-code programmer.

Features:

- FULL Instructions supplied with the program
- FIVE Modes of operation from memory dump to full automatic disassembly
- USER Definable and automatic labelling of code and data
- BUILT-IN Error checking to avoid disassembly to data areas
- BUILT-IN Operating system Entry point labels
- SAVE and LOAD facilities for dumping and recovery using tapes
- HARD copy facility
- EASY to use single key commands

BBC Disassembler.....£6.95

Price is fully inclusive and for a cassette program.

Simonsoft
Front Street, Topcliffe, N. Yorks, YO7 3RJ

DID YOU SOLVE THE RUBIC CUBE?
THEN FOR A £100 PRIZE
YOU MIGHT JUST CRACK THE

ALPHA CONUNDRUM

Each month a sophisticated Conundrum Program will be offered by Omega Software for those people who wish to try their skill and analytical ability against a mind bending puzzle. Entry will be closed on the last day of the second month of issue allowing some twelve weeks at most to solve the enigma. All entries should also contain a brief description of an original idea for a future Conundrum. The entry which contains the correct solution together with the most elegant idea for a future puzzle as judged by the company's Software Manager, will receive a cash prize of £100. All Conundrum Programs will be fun in their own right even if you do not solve the problem in time. Entry solutions should be submitted on a postcard in a sealed envelope with your name and address clearly stated. These competitions are not open to employees of the company or to any person directly or indirectly associated with its activities. No correspondence can be entered into and the decisions of the company's Software Manager regarding all matters relating to these competitions will be final. Winners will be notified by post and entry implies acceptance of these rules. Only individual purchasers of programs will be eligible to enter.

OMEGA SOFTWARE

Please send me an Alpha Conundrum Program for ☐ ZX81 16K-£6.50 ☐ Spectrum 16K-£6.50 ☐ Vic 20-£6.50 ☐ BBC B-£6.50
for which I enclose my cheque/postal order for £_____ made payable to Cambridge Research.

Name _____

Address _____

Cambridge Research
Chesterton Mill, French's Road
CAMBRIDGE CB4 3NP England

DAMS BUSINESS COMPUTERS
Not Simply a Computer Dealer

VIC/ COMMODORE 64 IEEE CARTRIDGE

A breakthrough for all VIC/64 users. The DAMS IEEE is a simple, plug-in Cartridge interface which slots into the back of your VIC/64 and links it to disk drives, language packs, printers and other peripherals. Run several VIC/64's. from one disk drive.

£49.95 + VAT.

(Price including VAT. £57.44).

'CLEAR-VIEW' ANTI-GLARE SCREEN

This exciting new product from DAMS is the answer to eye fatigue, headaches and migraine - symptoms regularly encountered by VDU operators. The 'Clear-View' screen can be fitted in seconds to most leading brands of computer monitors or microcomputer screens, and immediately reduces unwanted glare and reflection to a minimum. Suitable for use with mono or colour displays.

up to 12" £19.95 + VAT. (Price inc. VAT. £22.94).

13" to 20" £24.95 + VAT. (Price inc. VAT. £28.69).

20" and larger by special order.

(Leaflet available on request with full technical specification).

VIC AID

Commodore 64 version available now!

Vic Aid is a chip which slots easily into the DAMS RAM'N ROM Board, and offers two sets of Utilities in one for the keen programmer:

Programmers Tool Kit
Gives extra commands: Auto, Number, Help, Delete, Change, Trace, Step, Light Pen, Break etc.

Machine Code Monitor
Gives Save, Memory, Display, Load, Verify etc. (similar to TIM on PET).

£19.95 + VAT. (Price inc. VAT. £22.94).

VIC/COMMODORE 64 RAM'N ROM BOARD

Doubles the memory capacity of your VIC/64 and gives you the facility to fit extra functions (VIC AID, VIC MON etc). Comes complete with specially designed cover.

£22.95 + VAT. (Price inc. VAT. £26.39).

VIC MON

Commodore 64 version available now!

Another fine product to enchance the machine - code capabilities of the VIC, VICMON is the ultimate programming aid, incorporating: Assembler, Dissassembler, Fill, Re-Locate, Identify, Exchange, Compare, Printing etc.
Slots into the DAMS RAM'N ROM board or similar.

£19.95 + VAT. (Price inc. VAT. £22.94).

da dams dams BUSINESS COMPUTERS

DAMS BUSINESS COMPUTERS LIMITED
GORES ROAD, KIRKBY INDUSTRIAL ESTATE, KIRKBY, NEAR LIVERPOOL. L33 7UA. TEL: 051-548 7111

CREDIT CARD TELEPHONE ORDERS WELCOME (Normal Office Hours).

DEALER ENQUIRES WELCOME

Send your business card, and receive our dealer 'fact-pack' NOW!

12 months parts & labour guarantee on all products.

Please send me the following items

_____

_____

_____

I enclose cheque/P.O. OR please debit my:

Access No. _____

Barclaycard No. _____

Name _____

Address _____

_____

_____ Tel: _____

(Prices inc. p+p) YC2.83

Returning by popular demand

Britain's biggest Micro show

THE Computer Fair

Personal computers
Home computing
Small business systems

Sponsored by Practical Computing and YOUR COMPUTER

at Earls Court, London 16-19 June 1983

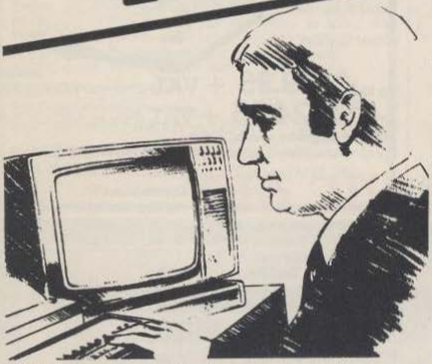

Your chance to promote your products and services at Britain's No. 1 Micro Show

Whatever branch of the business you're in – manufacturing or supplying: microcomputers, peripherals, associated accessories, software, books, video games – you need The Computer Fair.

This year the show will be bigger, open for four days – including a special Businessman's preview on the first day – and will be staged in a much larger area. Hits of last year – the Sinclair Village, Club Avenue and the Micro Mouse Contest – will again be featured at The Computer Fair '83.

Last year 38,432 people passed through the turnstiles in only three days – this year is going to be an even greater success. Complete and return the coupon below for further information.

Return to: The Exhibition Manager, The Computer Fair, IPC Exhibitions Ltd, Surrey House, 1 Throwley Way, Sutton, Surrey SM1 4QQ.

THE Computer Fair

Please contact me with details about exhibiting at The Computer Fair

NAME _____

POSITION IN COMPANY _____

COMPANY _____

ADDRESS _____

_____

TEL _____



An essential aid to all computer owners with Plot, Draw, Draw to a plotted co-ordinate, and medium/high resolution graphic capabilities, VICTAGRAPH gives you a fully adjustable window from plot 0,0 to plot 320, 200.

Higher resolution is possible by simple multiplication X2, etc., or reduction by division. Plot 0,0 in each corner to suit your requirements.

Place your drawing, tracing diagram etc., on a single sheet of paper and position in the VICTAGRAPH, AND you are ready to plot all the points quickly using the movable window AND easy to read scale.

Made from high quality plastic sheets, 17" × 12" approx.

Ideal for multi-graphic resolution computers such as Atari etc. Not suitable for Spectrum.

Total price £7.00. Cheques payable to: Victa Ceramics and crossed. SAE for Details. UK only.

VICTA CERAMICS
6a BOW STREET, RUGELEY
STAFFS WS15 2BT.

Self Adhesive Cassette Labels

★ ON ROLLS OR SHEETS
★ IDEAL FOR USE IN TYPEWRITERS
★ A BOON TO SOFTWARE PRODUCERS
★ CAN BE PRINTED WITH CLUB OR COMPANY LOGO OR SYMBOL

CASSETTE LABELS ON SHEETS (15 Labels per sheet)		CASSETTE LABELS ON ROLLS (Complete with tractor feed perforations to allow use in most computer printers)
100 Labels	£3.50	Square or round ended centre hole
200 Labels	£6.00	Minimum order 500 labels
300 Labels	£8.25	500 Labels £11.00
400 Labels	£10.00	1000 Labels £20.00
500 Labels	£12.00	2000 Labels £35.00

All prices include VAT and postage/packing
Good discounts for larger quantities
Please send 15½p stamp for printing price lists and sample labels

Industrial Process
Unit A4
Eurolink Ind. Estate
Sittingbourne
Kent ME10 3RN
Sittingbourne (0795) 28425

C.J.E. Microcomputers

BBC SPECIALISTS

VAT included where applicable

QUALITY DISK DRIVES

Single drive 40 track single sided 1 × 100k £200.00
Dual drive 40 track single sided 2 × 100k £350.00
Dual drive 40 track double sided 2 × 200k £546.25
Dual drive 80 track double sided 2 × 400k £799.25
All drives are cased with own PSU for reliability, and include connecting cables and utilities disk.
Delivery £4.00.

SOFTWARE FOR THE BBC MICRO

MISSILE CONTROL the first implementation on the BBC Micro of the popular arcade game. (32K) £9.00
MAZE MAN an authentic version of the popular arcade game. (32K) £6.00
BALLOONS a highly original game that soon becomes compulsive playing. (32K) £6.00
DISSASSEMBLER the memory dump routine includes a scrolling back in memory facility. (16K) £5.00
MISSILE CONTROL, MAZE MAN & BALLOONS use the Keyboard or Joysticks for control

30+ PROGRAMS FOR THE BBC MICROCOMPUTER

This Book contains program listings, with explanations & tips on using the BBC Micro
GAMES UTILITIES GRAPHICS & MUSIC
Most programs will run on Model's A & B
Edited by C.J. Evans, various Authors.
A pair of cassettes with all the programs is available.

BOOK £5.00
BOK & CASSETTE SET £9.00

LEADS

The BBC Micro comes without a cassette lead
7Pin Din to 2 × 3.5mm & 1 × 2.5mm minijacks £4.00
7Pin Din to 5Pin Din & 2.5mm minijack £4.00
7Pin Din to 7Pin Din £4.00
7Pin Din PLUGS ..... Two for £0.65
6Pin Din PLUGS (for RGB socket) ..... Two for £0.65
5Pin Din PLUGS (360° for RS232) ..... Two for £0.65
RS423 TO RS423 (BBC Micro to BBC Micro)
Two metre cable £4.00 Four metre cable £5.00

TELEVISION/MONITOR LEADS full range available

Phono plug to Co-ax with high quality cable 3 Metres £3.00
BNC Plug to BNC Plug £3.10
BNC Plug to Phono Plug (i.e. BBC Micro to Rediffusion TVRM) £2.20

PRINTER CABLES

BBC to 36 way Centronics Type connector £17.50
BBC to 25 way D Type (For use with RS232) £9.50
BBC to 40 way edge connector (Centronics 739) £20.00
TORCH to 36 way Centronics Type connector £20.00

BLANK C30 COMPUTER CASSETTES

Ten for £4.50

15 Way D Type Plug with Cover £2.75
Computer graphics design pads 100 sheets £4.00

BBC UPGRADE KITS

RAM UPGRADE (100ns) £23.00
KIT A Printer & I/O Port £9.50
KIT B Analogue Port £8.00
KIT C Serial I/O & RGB £10.00
KIT D Expansion Bus/Tube £7.50
Full Upgrade kit £58.00
All components full specification

STAR DP8480 PRINTER FROM £250.00 INC VAT

80 CPS : 80/96/132 COLS
BIDIRECTINAL LOGIC SEEKING
TRACTOR WITH FRICTION FEED
CENTRONICS ..... £217.39 + £32.61 VAT = £250.00
RS232 ..... £235.00 + £35.25 VAT = £270.25
High Res Graphics option to allow BBC Screen dumps £15.00/£20.00
(24HR SECURICOR DELIVERY FOR PRINTERS £8.00)

VAT included where applicable

Send SAE for full Price List of our large range of accessories.
POSTAGE Add 50p per order or as stated

C.J.E. Microcomputers
Dept (YC), 25 HENRY AVE, RUSTINGTON, W. SUSSEX BN16 2PA (09062) 6647

WANTED

Programs for SPECTRUM, DRAGON, ZX81, ORIC,

A REWARD UP TO

£2000

TO BUY THE COPYRIGHT OR.... 30% ROYALTIES,
....A FIXED AMOUNT PER TAPE WE SELL OR

ANY COMBINATION OF THE ABOVE

WHY GIVE THE PROGRAM TO US

We are one of the fastest growing Software Houses in the country

.... Our Tape production is second to none. All our programs are now duplicated by DATA DUPLICATION SERVICES LTD....
A company set up with the sole purpose of tape duplication for the Home Computer Market.

.... Our presentation is of the highest standard

.... We not only sell our products nationally but in over 25 countries worldwide.

.... We have the time and finance necessary to ensure your programs receive the attention and background necessary for truly effective marketing.

£1000 Paid for best program using MCODER

Personal Software Services

452 Stoney Stanton Road., Coventry, CV6 5DG

Save money. Subscribe NOW!

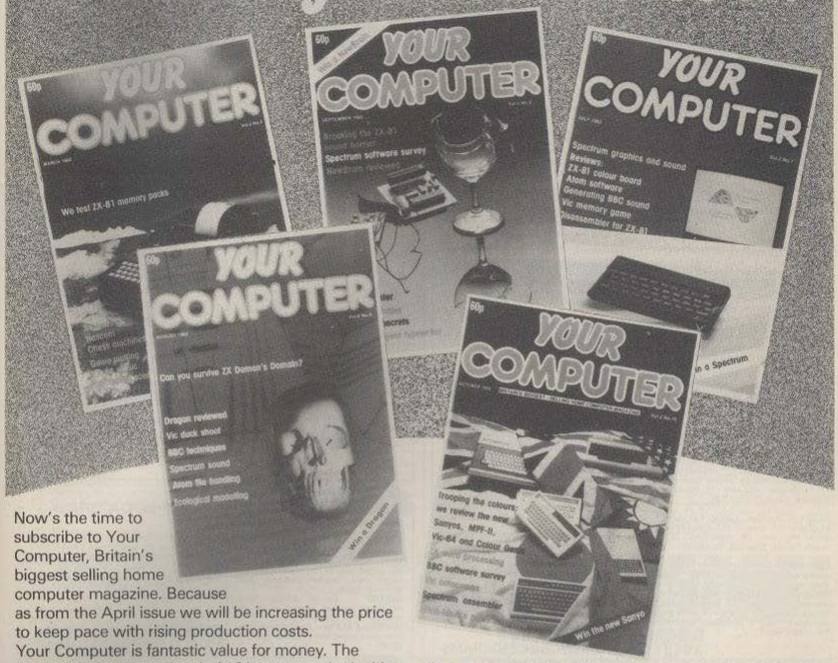

Now's the time to subscribe to Your Computer, Britain's biggest selling home computer magazine. Because as from the April issue we will be increasing the price to keep pace with rising production costs.

Your Computer is fantastic value for money. The December issue consisted of 164 pages packed with computer and software reviews, a special games section with listings for all the major home computers, articles on writing programs yourself, three features just for ZX81 owners, and Response Frame — the page which answers your questions. All this, PLUS a free Flexidisc containing games for the ZX81, Vic 20 and Sinclair Spectrum. The price? Only 60p.

And that issue was typical of the value which Your Computer readers have come to expect. Rather than cutting down on editorial and on the lively presentation which makes Your Computer so readable we are dedicated to maintaining our editorial standards. But with production costs rising we can only maintain quality if we increase the price of the magazine.

We know you'll think it worth paying the little extra we'll be asking because Your Computer will still be unrivalled value for money. Meanwhile, a subscription taken out NOW at the old rate of only £8.00 for 12 issues will save you money throughout 1983 — and beyond!

Just fill in the coupon and return it to us with your cheque or postal order for £8.00 payable to IPC Business Press.

To: Subscription Manager, Your Computer, IPC Business Press (S&D) Ltd., Oakfield House, Perrymount Road, Haywards Heath, Sussex RH16 3DH.

I wish to save money by taking out a subscription to Your Computer at the current rate of £8.00 for 12 issues. My cheque/postal order for £8.00 is attached.

Alternatively, please debit my Barclaycard/Access/Diners Club/American Express* account.

☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐☐

Signature _____

**Please delete as appropriate*

Please start my subscription with effect from the:

February 1983 issue ☐ (Please tick appropriate box)
March 1983 issue ☐
April 1983 issue ☐

Name _____

Address _____

_____

_____

CLASSIFIED

Weekend courses in Sinclair Basic, starting February 1983. 15 hours of instruction from a qualified lecturer, Friday evening to Sunday evening.
Luxurious 3-star Worcestershire Hotel, all rooms with bath and other facilities.
£55.00 inclusive.

GAINSBOROUGH HOUSE HOTEL
Bewdley Hill, Kidderminster
(0562) 754041 1/1

ZX-81 GRAPHICS board £19.95. Fits inside case. Define up to 64 characters (+inverses). SAE. D. Hutchinson (Circuits), 103 Vicarage Wood, Harlow, Essex. 14/1

SPECTRUM 16K/48K Bury the Moles. Totally addictive. Exciting arcade game. Superb graphics/sound. DIG holes, bury moles. 1/2 players. Highest score. All action! Just £3 for cassette. Mr D. Chambers, 12 Ryburn Avenue, Blackpool, Lancs FV4 4DY. 12/1

SJY Program for ZX-81 and Spectrum Computers. Details of night sky for every night of the year. Send £5 to Mr J. S. Coombes, 97 Hollyfast Road, Coventry CV6 2AF or send for details of other astronomical programs. Money back guarantee. 11/1

BBC:/MX80FTIII Screen Dump Utility. Extra large printout on two sheets or print screen full width but down instead of across sheet. £7. Also MZ80K Armoured Invasion. Gripping game, nine skill levels. Sound, good graphics. £7. Stevedrive Software, 19 Newlay Lane, Bramley, Leeds 13 LS13 2AL. 6/1

MZ80A/K Business, Games Programs from £3. Copier £4. Basic+ £12. Code Editor £14. Word Processor £8. Lists/SAE. DCS, 38 South Parade, Bramhall, Stockport. 4/1

TEACHER? Spectrum owner? Use your machine. Mark book on cassette. Class list. Year list. Sort alphabetically. Input marks. Converts to percents, grades, ranks. Graph results. "Z" scores for clear comparison. Means, standard deviations. £4.80 for cassette and notes. Farris, 8 Thompson Road, Bolton. Tel: (0204) 45007. 13/1

SPECTRUM
Arcade Games for 16/48K Sinclair Spectrum

PINBALL — Better than the real thing
SPACE INVADERS — Arcade style invaders
CAR RACE — Race a computer controlled car — on screen circuit
SPACE FIGHTER — Pilots eye view
DESTROYER — Attack by submarines and planes
TENNIS — Control figures movement and strokes
TANK BATTLE — Computer controls attackers

All £2.49 + p&p 30p
Written by professional programmers

WINTERS LTD., 24 SWANNINGTON CLOSE, CANTLEY, DONCASTER 17/1

EX OWNERS Make money with you ZX-81 or Spectrum. We are leading suppliers of software to Sinclair, with a superb range of games cassettes for the ZX-81 and Spectrum. We require part-time agents in all areas to find and service retail outlets for our products. Car owners, over 18, with telephone, write for details to: M. Meek, 3,Coko-Gen, 24 Agar Crescent, Bracknell, Berks. 2/1

TEXAS TI99/4A SOFTWARE for unexpanded machine. A graphic wargame with detailed display. Strategy, tactics and different levels of skill as you play the computer or another player. 'Wargame' costs £6.00 inclusive. German Whist and Four in a Row. The computer will even speak if you have speech facilities! Both for £8.00 inclusive. TX Software, 109 Abbotsweld, Harlow, Essex. 22A/1

DRAGON 32 SOFTWARE

Quality software at sensible prices.

Caterpillar & Space Attack	£2.95
Meteor Run & Breakout	£3.95
Haunted House	£3.95
3-D Maze	£3.95
Island Adventure	£3.95
Forbidden City	£4.95
Devil's Island	£4.95
Goblin Caves	£4.95

All prices include p&p.
Send s.a.e. for complete list.

APEX TRADING LTD. (YCD)
115 Crescent Drive South, Brighton BN2 6SB
Tel: Brighton (0273) 36894
Access/Barclaycard accepted 18/1

ZX81 (16K) card-index programs on cassette up to 325 entries. Machine code. £4.50 Cambyte Software, 28 Norfolk Avenue, Newmarket. 20/1

TEXAS TI99/4A SOFTWARE for computer with Extended Basic module. Battlefront and two other fast action games. Highly recommended. £6.00 inclusive.
TX Software, 109 Abbotsweld, Harlow, Essex. 22/1

Swap your unwanted software via Software Exchange Club. S.A.E. for details, UKsec 15 Tunwell Greave Sheffield S5 9GB. 24/1

WORTHWHILE PROGRAMS

16K ZX-81 and 48K Spectrum.

FIRST AID — teaches the principles of first aid. Fully scoring. Ages 13+.

COMMUNICATOR — Morse code, semaphore, verbal reporting, use of telephone. Ideal for cubs and scouts. £4.99 each. State machine. Cheques/POs to:

Network Computer Systems Ltd. 39 Bampton Road, Luton, Beds. 9/1

VIC & ZX81 SOFTWARE £1.99

SPACE FIGHTER
A space dogfight simulator. The VIC version is entirely machine code with hi-res etc. The ZX81's real time section is in m/c.

ASTRO SLED
Pilot your sled through the jagged space canyon — with machine code for speed. These programs are for unexpanded VIC 20s and 16K ZX81s.

VIC ASTEROIDS
100% machine code, with thrust, hyperspace, multiple bolts, etc. etc. For

VIC 20 only.
All programs on cassette at the introductory price of **£1.99 each (plus 60p p&p** per order). Please state ZX81 or VIC, and mention *Your Computer* Magazine, when ordering.

ARCADIA SOFTWARE, FREEPOST, Swansea, SA3 4ZZ 23/1

DRAGON GAMES

Three fast moving ARCADE style games written in machine code for your DRAGON.
SNAKES The only way to kill them is shoot them in the head. Your man may move anywhere in the forest. Snakes enter one at a time, if you don't kill it quickly another will enter. Up to 12 snakes at one time (if you live that long). Fantastic sound and graphics.
LANDER Land your space craft on one of the landing pads (score depends on chosen pad). High resolution picture of craft and lunar surface. Very impressive display.
INVADERS The old favourite. Features include 35 invaders, mother ship and three defenders. Six digit Hi-score + score counters. Nine selectable skill levels. All in High resolution COLOUR graphics and sound.
ALL THREE GAMES ON ONE TAPE (order DGT2) only £6.95 incl. P/P etc.
J. MORRISON (MICROS), 2Glensdale St., Leeds LS9 9JJ.(0532) 480 987. 10/1

16K ZX81 League Table program, including M/C. £3.95. D Stevenson 11 Main Street Whissendine Oakham Leics. LE15 7ES. 32/1

10 BBC games (A or B) including Dalek, Chicken, Mastermind, Breakout, Luna Lander £5. S Brooks 26 Cae Cryciog Llanfairpwll Anglesey N. Wales LL61 5JS. 33/1

Acorn Atom 12K F.P. ROM 12K RAM P.S.U. books joysticks 30 programmes on cassette £150 o.n.o Maidstone 53748. 34/1

Programs for Spectrum, VIC, BBC for sale. Send SAE to: Odyssey Software, 8, Greenbrook Ave, Hadley Wood, Barnet, Herts. For details. 35/1

VIC-20 (Unexpaned) games tape: Punkman, Black Knight, Grand Prix, Cavern Shoot, Amaze, Side Shoot, all six for £5 inc. p&p. Fast delivery from Starraker 21, Hoyle Rd., Hoylake, Wirral L47 3AG. 39/1

BBC 'B' £350. Most Acornsoft Software £5. Each recorder with cable £10. Emigration imminent 01-229 5888. 38/1

BBC EDUCATIONAL PROGRAMS

Send for details of our quality programs.
COTTAGE SOFTWARE, HEATHER COTTAGE, SELLY HILL, WHITBY, NORTH YORKSHIRE 2 3 /1

BBC(32K) or VIC20 (6.5K)

NEW COMPUTER? Try our guaranteed software — for parents and children (ages 4-15) who want to do more than just shoot aliens!
LETTERS (BBC only) — ages 4-6: learn the correct way to form letters with our Magic Pen! Teacher checked. Great graphics. £9.95.
INKOSI — Be an African King! Adventure for ages 10-adult — can you beat the witch doctor? £5.95.
INVISIBLE MAN — Co-ordinates game with good sound and graphics, ages 7-14 £5.95.

. . . and more!!
Send SAE for details:
Lowmoor Cottage (YC2),
Tonedale, Wellington,
Somerset TA21 0AL.
082 347 7117 7/1

CBM/PET Computer, Model 4016, 16K memory and programme toolkit £300 o.n.o V.G.C. Phone 01-267 5035. 25/1

MZ80K/A Horserace Analysis. Winners galore. A serious program. Cassette: £5.75. Details: Paragon Moorside Woodlands Wimbourne Dorset. 26/1

ZX-81 M/C cassettes: 1) PacMan-81 (6K): 1-4 Ghosts, Sideloops, Powerfields, Fruit: £3.95. + Spaceventure: 5 1K games: Asteroids, Pilot, Taxi, Defender, Canyon: £2.50. 3) PacMan-81 + Spaceventure: £4.95. (S.A.E. Details): A. Laird, 9 Franklin Rd., Saltcoats, Ayrshire. 28/1

ZX80/1 Register lists 700 suppliers 550 programs 250 peripherals 100 publications £3.95 including new supplement Youngs Computer Publications 2 woodland Way Gosfield Halstead Essex. 30/1

SPECT-A-DRAW

NOW AVAILABLE — A 48K Spectrum version of the well known Level II Basic Pools prediction program 'Compute-a-Draw'.
"A BOON FOR THOSE INTERESTED IN WINNING THE POOLS" — Interface, December 1982.
Program on cassette with instruction manual. £4.95
Database tape (Optional, but contains data on over 6,000 matches. £13.50
Program and database together. . . £17.50

or S.A.E. for details.

B.S. McAlley.
1 Cowleaze, Chinnor, Oxon. OX9 4TD. 37/1

BBC Micro FOOTBALL POOLS PREDICTOR

An easy to use, but very powerful, mathematical and statistical forecasting program. Uses six different methods of prediction. Model A or B. On cassette with full instructions for same day dispatch.

£4.99

Mayday Software, 181 Portland Cres., Stanmore, Middx HA7 1LR 5/1

DRAGON 32
747 FLIGHT SIMULATOR

Superbly realistic instrument panel and pilots view in Hi-Res graphics. Lifelike simulation including emergencies such as engine fires and hydraulic failures. This 32K program uses the Dragon's excellent graphics facilities to the full to produce the most realistic simulation you yet seen on a home computer. There are 21 real dials and over 20 other indicators (see diagram). You control throttle, ailerons, elevators, elevator trim, flaps, slats, spoilers, landing gear, brakes, reverse thrust and see the runway centreline in true perspective. Uses joysticks and comes with bound 12 page manual. Includes options to start with take-off or random landing approach and restart.
Cassette £9.95 (P/P and VAT included).
D.A.C.C. LTD., 23 Waverley Rd., Hindley, Gtr. Manchester WN2 3BN.



CLASSIFIED

COMPUTER PARK '83

INTERESTING, FUN, EXCITING, EDUCATIONAL

COMPUTER PARK '83 is a residential computing holiday catering for all interest. Join other computer enthusiasts for a week of fun and fascination with a wide range of micros and peripherals.

Experiment with:
ROBOTICS, GRAPHICS, SPEECH SYNTHESIS, MUSIC, LISP, PASCAL, FORTH, MACHINE CODE.

We also offer a wide variety of other interesting indoor and outdoor activities. Suitable 10yrs upwards. Residential during August in a beautiful country house.

Details: The Nook, Back Lane, Little Addington, Kettering, Northants. NN14 4AX.

46/1

TRS80 — VIDEO GENIE SOFTWARE

We offer a great selection of games and utilities from many leading software houses at reduced prices. As a special offer, to introduce you to our software, we are giving away, well almost, a software pack with a super variety of 25 full length programmes on it, and all for only £7.50!!! Do not miss out! Send for your illustrated catalogue today. Please enclose an s.a.e.

SPARTAN SOFTWARE
DEPARTMENT YC
9 Cotswold Terrace,
Chipping Norton, Oxon.
Telepone:— 0608-3059.

31/1

"SPECTROFILE" versatile filing program for 48K Spectrum . Applications endless. Features: 31K for variable length files user specified formats, search, alter/delete, Index, supports printer. £5.75 to Scurtis, 8 St. Andrews Avenue, Bulwark, Chepstow, Gwent.

51/1

VIC20 tape of six games. Minefield, Bats/Bugs, Bricks, Ski-run, Brands, Jelly-Men. Available from D. Poynter 6 Borrowdale Close Wistastow Crewe £5.50. 69/1

VIC20 software fantastic value £1. For space game + list inc P&P D Spencer 230 Lowgrange Avenue, Billingham. 44/1

Proteus Software announces Commodore 64 programmes including Proteus Challenge £8.00, Plane Lander £8.00, Battleships £7.50. S.A.E. for details of other programmes to Proteus Software, 8 Glaston Court, Grange Road Ealing W5 5QR. 48/1

COMPUTER COVERS for the

- **BBC (A&B)**
- **DRAGON 32**
- **VIC 20 & 64**

Protect your equipment from dust with one of our specially designed fitted covers.

Manufactured from a top quality sealed nylon in a complementary colour.

Send cheque/PO for **£3.95 in p&p**

ALSO AVAILABLE
Covers for all peripherals to your dimensions
- PRINTERS
- MONITORS
- DISC DRIVES etc.

Please ask for a quotation

J & S WALLACE, 9 BARN CLOSE, CREWKERNE, SOMERSET TA18 8BL

45/1

16K ZX81/SPECTRUM MANAGEMENT GAMES

DALLAS. A game of oil exploitation in Texas. Decisions are required on purchasing concessions, the movement and use of drilling rigs, and the building of platforms, production facilities and pipelines. Can you take-over the Euing Empire?

AIRLINE. You must decide on number of aircraft to operate, loan and fuel contracts, whether to buy or charter, and levels of staffing and maintence.

AUTOCHEF. As MD you must negotiate for leases, decide on menu prices, level of wages, advertising and dividends and forecast levels of inflation. If you are not successful you will be made to resign!

FOR THE EXPERT

PRINT SHOP. As owner of a printing company you have to decide on staffing, paper stocks, quotations, work schedule.

£5.00 for one £8.50 for any two, £12.00 for three or £16.50 for four.

C.C.S. Please state computer type and send cheque to Dept YC
14 Lanton Way
London SE3 7TL

27/1

SALE SALE

DRAGON 32 GAMES

STARTREK III (superb graphics).... £8.00
CHECKERS (children's delight).... £3.50
3-D DESIGNER (shapes galore)..... £5.00
LUNA LANDER (a challenge)..... £4.00
DRAGONSLAYER (the ultimate adventure! £1 0 . 0 0

S.A.E. & 50p for Catalogue
SAINT GEORGE SOFTWARE, Dept. YC,
73 Ling Street, Liverpool L7

29/1

Spectrum Disassembler & Blitz tapes £2.00 each or £3.50 together inc p&p. Send cheque/PO to Holliday, 44 Lennard Road London SE20 7LX. 40/1

SELL IT WITH YOUR COMPUTER

CLASSIFIED ORDER FORM

Classified Rates
Linage: 30p per word (Min 15 words) — prepayable

Linage advertisers should complete the form provided in BLOCK CAPITALS. Phone number counts as 2 words. Name and address to be paid for if used in advertisement. Box Number if required is £3.00 extra.

Display — rates per scc (Min 2scc)

One insertion	:	£7.00
Three insertions	:	£6.70
Six insertions	:	£6.50
Twelve insertions	:	£6.00

Display advertisers should provide separate copy and preferably reserve space by phone (01-661 3031).

Method of Payment
Cheques etc. should be made payable to IPC Business Press Limited and crossed "& Co" I enclose herewith cheque/PO for

£.....

Please debit my Access/Visa Barclay Card/American Express/Diners Club Int/ as below

SIGNATURE

Post to:
Cut out the order form and return together with your remittance to: Classified Department, Your Computer, Room H211, Quadrant House, The Quadrant, Sutton, Surrey SM2 5AS. (01) 661 3031

Please insert the following advertisement in Your Computer Classified Section

					LINAGE
					£4.50
					£6.00
					£7.50
					£9.00
					£10.50
					£12.00
					£13.50
					£15.00

No. of insertions required ☐ Box No. required YES/NO

NAME *(Please include initials)*.....

ADDRESS.....

.....

.....

Payment by credit card please state address card is registered

Daytime tel. no .....

THIS FORM SHOULD BE RETURNED BY JAN. 30 FOR MARCH ISSUE PUBLICATION

CLASSIFIED

SPECTRUM/BBC SOFTWARE

Soft Sell Softape One.
Contains Kami-Kazi Pilot (Action game) Fruit Machine (Hold and Gamble) Character Design Aid (Great facilities).
All three on a quality cassette for any Spectrum £3.50 for BBC Model B £4.50.

Cheques/PO's to Soft Sell
Computer Software, 68 Wellington Street, Long Eaton, Nottingham NG10 4NG.

68/1

BBC Micro Graphics Pad. Graphics Screen, Teletext Screen, user-defined Cells, Commands Guide, Intro. Price: £1.99 plus 65p p&p. Hermes Computer Products Dept YC, 10 Barlow Moor Close, Norden, Rochdale Lancs. OL12 7RN.

Spectrum software library. Weekly hire from 50p. Try programme out before you buy. Send stamp for free catalogue to Thomas McQueen, 25 Blenheim Gdns. Brixton Hill, London. S.W.2.

50/1

Atari 400/800 Games, Space Invaders, Basketball, Robo Galaxian, OutlawTHowitzer, Lunar Lander, Action Quest, Scram, 747 Simulator, Beta Fighter, Tank Trap, Tari, Trek. £100.00 the lot Phone 0420 84618.

Spectrum of ZX81 16K. Holiday Cost Comparitor. Save 100's. Simply enter the screen prompted inputs from travel brochures, and up pops a list in price order showing True total and per day costs, including all hidden extras. Cassette and Instruction Sheet. Only £3.95. Z-EXTRA 13 Greenend Close, Spencers Wood, Reading.
P. R. Herbert trading as Z-EXTRA, 13 Greenend Close, Spencers Wood, Reading RG7 1EH. (0734) 883977.

42/1

Spectrum 48K, ZX81 16K, Business Cash Forecast. Know where your business is going. Monthly forecast, Income, Payments, VAT, Balances, Etc. Seasonal variations, Trends. Easy to follow screen prompts. Helpful Input Charts. No maths needed. All from previous years accounts. Monthly revise option. £5.95 Z-EXTRA 13 Greenend Close, Spencers Wood, Reading.

41/1

ZXSPECTRUM: 3D Cube: De Rubic's Cube, revenge, and even 6 × 6 × 6 in full 3D, and save your moves on tape. £4.95. HIGHLO: Addictive hi-res graphic card game (realistic picture cards). £3.95. Megadodo Software, Dept. YC1, 16 While Road, Sutton Coldfield, W. Midlands

56/1

ZX SPECTRUM

BACKGAMMON: Uses machine code for 5 second response-time, plays official rules, prevents any cheating!
(48K only) £4.50

ASSEMBLER: All Z80 opcodes, with labels for addresses after JP, CALL & LD. Any number of labels may be used. Includes error checks, option for printer output, and full user instructions.
(For 16K and 48K) £3.75

GAMES TAPE 2: 3 games, all with different skill levels. With machine code for fast graphics and sound. Comprises Blitz, Snakebyte and Fighter.
(for 16K and 48K) £3.75

All prices include p&p. Cheque/PO to:
Pi Software, 18 Pilgrim's Lane, London NW3 1SN.

67/1

MUSICSOFT

BBC MICRO 32K A/B.

5 music games of memory and dexterity. Multicolour graphics. Fun for 5 year olds yet frustrating for graduates. Variable speeds and scale levels. Cassette and Instructions £3.50

Cheques to Musicsoft
12 Fallowfield. Ampthill. Beds.

36/1

ZX81 fast load and save 4 × s faster than normal £5.00. Amazing Software 43, Ashlands Sale, Manchester.

52/1

Acorn Atom "Spack-Man" 2.5K. Monsters, Powerfills, Sound, Highscore, Auto-run cassette £4.50, Instructions. S. Brown, Ailsa Lane, Itchen, Southampton.

53/1

Spectrum Bridge cassettes, Beginners, Advanced, £3 each. Cheques, PO's to M. Blythe, 235 Birmingham Road, Sutton Coldfield, West Midlands B72 1EA.

54/1

Jupiter Ace. Two maze games with useful words for moving characters around screen, reading from display file etc. £1 plus S.A.E. for listing. F. M. Collins, Sylvestris, Ham Lane Elstead GU8 6HG.

55/1

To adventures, medieval and extra terrestrial for the 48K Spectrum. Two for £3.50!! R.AGER, 9 Sherwood Road, Wimbledon, London S.W.19

57/1

VIC-20 (unexpanded) games tape (No.2): Bomber, Breakout, Nibbles, Froggy, Space Gobblers, Bank Robber. All 6 for £4.95 inc. p&p. Fast delivery, from: Starakar, 21, Hoyle Rd., Hoylake Wirral. L47 3AG.

58/1

16/48K Spectrum Pools Program. Calculates and prints expected results. + free blank tape for permanent records £4.95. Cassettes1 C5 and C12, £3.50 for 10 + p&p £1.40 (tapes only). Twenty blank labels £0.80. M.W. Holman, 60 Camperdown Street, Bexhill, Sussex. TN39 5BE.

59/1

DRAGON-32 SOFTWARE. Business software from £9.95. Educational & games from £2.95 S.A.E. appreciated. MISTRY MAGIC (yc), 76 St. Margaret's Road, Bradford BD7 2BY.

60/1

Spectrum games Sale. Venture (7 games in 1); was £6. 3 compulsive games, was £5. The lot on one cassette for just £6. Bobker, 29 Chadderton Drive, Unsworth, Bury, Lancs.

61/1

Family Tree Program: Update, Enquiry, Search, Browse: on cassette Spectrum 48K £6.50, ZX81 16K £5.00. State which. D Bradburn, Shieling Wayside Road Basingstoke RG23 8BH.

62/1

Acorn Atom, 18 months old, 12K and 12K including interface leads and over £40 software worth £300 but for quick sale £150. Tel Stafford 662244.

63/1

Atom 12K RAM 12K ROM with toolbox, BBC Basic, PSU £150. Many games half price. Tel: 0628 26437.

64/1

Teach your child to tell time, count money. Spectrum 16K: £5.50 for two fun programs on cassette. Vera Sampson, Richmond House, Ingleton, Carnforth, Lancs. LA6 3AN.

65/1

Dragon games tape. Bomber, Hangman, OXO plus others. All for £3.99. W. Thomas 21 Caerleon Court, Caerphilly, Mid Glamorgan.

66/1

ADVERTISEMENT INDEX

A
Abacus 90
Acorn 48
Adda Kobra 131
AF Software 52
AGF Hardware 91
Amba 72
Amber Controls 63
Amersham Software 14
Anirog 82
Artic 112
Audio Inside Back Cover
Automata 140
Autoram 118

B
Back Issues 139
Basicare 54
Beebug 140
Bi Pak 95
Bibi Magnetics 92
Bridge Software 78
Bristol Microfair 142
Buffer Micro 94
Bug Byte 136, 137

C
Cabel Electric 80
Calpac 140
Cambridge Computer Store 72
Cambridge Micro 76
Cambridge Research 146
Campbell Systems 104
Cardigan 118
Cascade 114
Casio 59
Cheetah Marketing 106
CJE 149
Clares Of Winsford 70
Cloyvale 104
Commodore 24, 25
Computers For All 5
Control Technology 40
CP Software 95

D
DJL Software 88
DJ Reading 32
DK Tronics 12, 13, 26
Dams Business 147
Downsway 70

E
Earls Court Computer Fair 148
Econotech 92
Elkan 86
Epson 39

F
Fern Leaf 118
Foil Kade 142
Fuller Design 145
Furlong 67

G
GCC 74
Gemini Marketing 10
Gemini Software 86

H
H & H Software 107
Hilderbay 88
Hisoft 88

I
IJK Software 41
Imagine 132, 133, Back Cover
Impact 141
Industrial Process 149

J
JK Greye 126
JP Gibbon 66
JRS Software 63

K
K & W Software 67
Kemps Micro 66

L
Laser Bug 108
Learned Information 36
Leon Noel 106
Level 9 87
Llamasoft 78
Lowe Electronics 134, 135

M
Malva 70
Maplin 6, 7, 66
M.C. Lothlorien 92
Melbourne House 11, 27
Memotech 96, 97
Micro Mania 104
Micro Power 44, 138
Microgame 78
Microgen 87
Microware London Ltd. 76
Microware Leic. 80
Midland Computer Fair 144
Midwich 126

N
National ZX Club 16
New Generation 87

O
Oric 110, 111
Oxford Computers 72

P
Phipps 32
Print N Plotter 18
Pro Software 87
PSS 55, 62

Q
Quasar 94

R
RD Labs 94
Redditch 86
Richard Shepard 4
Ross Software 146

S
Salamander 106
Severn Software 107
Shards Software 107
Silica Shop 53
Silver Soft Inside Front Cover
Simon Soft 142
Sinclair Research 19, 20, 21, 22
Sir Computer 82
Softex 23
Software Supermarket 17
Stork Rose 15
Sunshine Pub. 75
Superior Software 91
Software Farm 126, 140
Software Library 91
Software Winter 83
Swanley Electronics 74

T
Tangerine 143
Tempus 114
Timedata 74
Transform 76
Trojan 48

V
V & H Comp 107
Victor Ceramics 149
Video Software 86
Visionstore 8, 9

W
Warp Factor 8 141
Watson Software 118
William Stuart Systems 67
Workforce 48, 83

Z
ZX Microfair 154

THE REAL INVESTMENT

NEW:
THE X-ROMCARD

FOR YOUR ZX81

WHAT IS *SO* SPECIAL ABOUT THE SPECIAL RAMPACK?

fig. 1

fig. 2

WHAT IS SO SPECIAL ABOUT AUDIO'S 16K SPECIAL RAM PACK?

THE SPECIAL RAM PACK (16K) is the latest design of its kind, following at least a dozen similar products. It has many of the good points of its predecessors, including packs manufactured by **Sinclair Research, Memotech, Bygbyte** and **Econotech** to cite a few of the best known.

With the experience we have gained with memories both for the **ZX 81** and a **wide range of other Micros**, we are also able to offer some **exclusive new features**:

THE CASE: **The SPECIAL RAM PACK** has been designed to overcome the infamous **'wobbling'** problem associated with many other packs, and does not resort to **temporary solutions** such as **Velcro, Blutak, adhesive strip** or a huge, unsightly case. It clamps positively to the ZX 81 by means of a special built in ridge aided by a **resilient spring effect** in the connection socket (see figure 1).

EXPANSIBILITY: **The SPECIAL RAM PACK** is not only compatible with all software and hardware produced for the ZX 81, such as the **ZX printer**, but it also has the edge over other packs with its **expansibility**. You will find it interesting that the **keyboard sounder** option (if already included in the **SPECIAL RAM PACK**. It also has **expansion pins**, ready to receive — in the same case — the most advanced add-on ever designed for the ZX 81 — **the X ROM CARD** (see figure 2).

WHAT DOES THE X-ROM CARD OFFER?

1. **The X-ROM CARD has a built in autostart ROM.** Programs can be run automatically every time the ZX 81 is switched on. This will result in a huge increase factor for **ROM based software**, since all software houses are currently very aware of copyright piracy problems.
2. **The X-ROM CARD has a built in printer interface**, necessary if you wish to use a printer other than the ZX printer. **This is invaluable for any serious applications**, including **word processing**, where careful presentation is of the utmost importance.
3. **The X-ROM CARD has a built in EPROM burner.** This means that you can save Basic or Machine code programs onto silicon chips and play them back at any time.
4. **You may of course buy the X-ROM CARD to use with other Ram Packs** such as the **Sinclair Ram Pack**. However, when you purchase the X-ROM CARD with the SPECIAL RAM PACK, you will have the advantage of lower cost, greater reliability and neatness, since the whole system is nicely housed within a single case.

IN CONCLUSION, **The SPECIAL RAM PACK**, is the **best immediate investment** for your **ZX 81**. The availability of the **X-ROM CARD** opens the way to new software development such as **languages programming** and is the guarantee that your system will never be obsolete.

THE BEST GUARANTEE THAT YOUR ZX81 WON'T BE OBSOLETE FOR ONLY:

£ 19.95

including VAT

TECHNICAL SPECIFICATIONS:

- SPECIAL RAMPACK:
  - **Memory capacity:** 16K bytes.
  - **Maximum speed:** 200 ns access time.
  - **Power requirement:** Use exclusively Sinclair PSU.
- X-ROMCARD:
  - **Autostart ROM:** 4K byte, exchange for 8K bytes and software switch possible. Displays memory size, checks for byte "00" (identifies ZX basic) @ 2000H. Loads program if found, checks for byte "C3" and jumps (2000H) if found. Checks for presence of ROM in socket n.3 and ROM catalog, displays catalog if found. Contains also machine code monitor and printer utility.
  - **Preprogrammed ROM:** Catalog available on request. Use only 2732 or 2764 ROM/EPROM.
  - **Blank EPROM:** Use only 2764 — 8K bytes per device — in socket n.3. 3 × 9V, PP3 size batteries are needed to burn EPROM.
  - **Printer connection:** 16 pin DIL output, use standard IDC ribbon cable. Outputs include DO to D7, Strobe, Reset, Inputs include No-fault and Busy.
  - **Documentation:** Schematic diagram included, full listings of Autostart ROM extra (only for X-ROMCARD user, £1.50 + large SAE)

AUDIO-COMPUTERS
87 BOURNEMOUTH PARK ROAD,
SOUTHEND ON SEA – ESSEX SS5 2JJ

THE REAL INVESTMENT

SOLIDISK TECHNOLOGY LIMITED

87 Bournemouth Park Road, Southend-on-Sea, Essex SS2 2JJ Tel: 0702 613081

Item	Qty	Price Inc VAT	Total
SPECIAL RAMPACK 16K		£19.95	
X-ROMCARD		£14.95	
Experimental ROM CATALOG		free	
BLANK EPROM 2764		£ 8.95	
Postage and packing		£ 1.00	£ 1.00
Please charge my Access, Barclay account:		TOTAL £	

*Please delete/complete as applicable, cheque + £ payable to: SOLIDISK TECHNOLOGY LTD for £

NAME

ADDRESS

IMAGINE

a company brought into being by top professional programmers, graphic designers and software marketing specialists.

A company dedicated to the highest quality software and customer service in the world.

ARCADIA

the name of the game especially created to be the fastest, meanest, most addictive shoot 'em up game you've ever desired. Wave after wave of the most loathsome and deadly aliens billow hypnotically towards your space fighter with deadly intent. But then you have dual Plasma Disruptors and an Ion Thrust Drive haven't you? . . .

ZXSPECTRUM

(16K or 48K)
100% machine code with 12 different alien types, incredible animation and explosive effects, sound and the fastest, smoothest hi-res graphics ever!

VIC-20

(any memory size)
100% machine code with eight different alien types, smooth hi-res multicolour graphics and animation, narrow playfield and sensational sound effects. Keyboard or joystick.
Game design and software by D. H. Lawson.

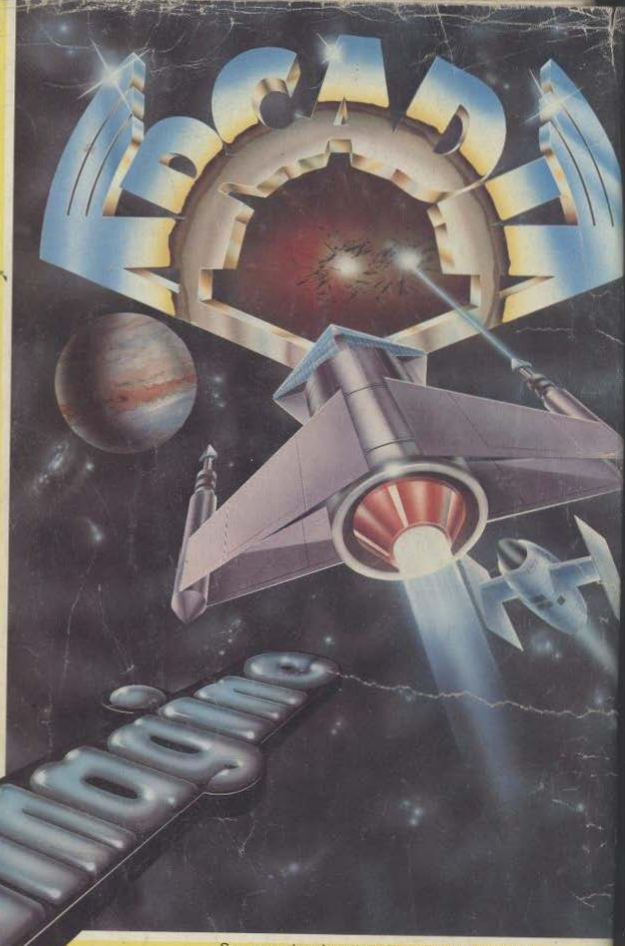

ARCADIA

For any ZXSPECTRUM or VIC-20. Just

£5.50

which includes first class postage and packing, V.A.T., and an **UNCONDITIONAL LIFETIME GUARANTEE.**

When you buy **ARCADIA** you buy it for life. If an Imagine software product **EVER** fails to load first time simply return it to Imagine for an instant free replacement.

ALL ORDERS DISPATCHED BY FIRST CLASS POST WITHIN 24 HOURS OF RECEIPT.

Imagine Software
Masons Buildings, Exchange Street East,
Liverpool, Merseyside L2 3PN.

SUPERFAST CREDIT CARD SALES LINE: 051 236 6849 (24hrs)

See our advertisement on pages 132 and 133

Why not put a first class stamp on your order and you will receive ARCADIA within 3 days of posting. Please allow for Xmas post!

Post coupon now to: YC2
Imagine Software
Masons Buildings, Exchange Street East,
Liverpool, Merseyside L2 3PN.

Please rush me a copy of ARCADIA for (tick box):
☐ **Any ZX Spectrum** ☐ **Any Commodore VIC-20**

*Please debit my Barclaycard/Access
I enclose Cheque/P.O. for £
*Delete as applicable

Name: _____

Address: _____